

Air Conditioning Technical Data

ERQ-AV1



- > ERQ100A7V1B
- > ERQ125A7V1B
- > ERQ140A7V1B

TABLE OF CONTENTS

ERQ-AV1

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Options	6
4	Selection procedure	7
5	Combination table	8
6	Capacity tables	9
	Cooling Capacity Tables	9
	Heating Capacity Tables	15
	Capacity Correction Factor	21
7	Dimensional drawings	22
8	Centre of gravity	23
9	Piping diagrams	24
10	Wiring diagrams	25
	Wiring Diagrams - Single Phase	25
11	External connection diagrams	26
12	Sound data	27
	Sound Power Spectrum	27
	Sound Pressure Spectrum	28
13	Installation	30
	Installation Method	30
14	Operation range	31

1 Features

- Benefit from the high efficiency and fast response to changing loads of ERQ condensing units
- Inverter controlled outdoor unit
- Predefined combinations with Daikin Modular air handling unit offer ready to use 'fresh air packages'
- R-410A heat pump



2 Specifications

2-1 Technical Specifications					ERQ100AV1		ERQ125AV1		ERQ140AV1	
Capacity range				HP	4		5		6	
Cooling capacity	Nom.			kW	11.2 (1)		14.0 (1)		15.5 (1)	
Heating capacity	Nom.			kW	12.5 (2)		16.0 (2)		18.0 (2)	
Power input	Cooling	Nom.		kW	2.81 (1)		3.51 (1)		4.53 (1)	
	Heating	Nom.		kW	2.74 (2)		3.86 (2)		4.57 (2)	
Capacity control	Method				Inverter controlled					
	Cooling	Min.		%	24					
		Max.		%	100					
EER					3.99 (1)				3.42 (1)	
COP					4.56 (2)		4.15 (2)		3.94 (2)	
Dimensions	Unit	Height		mm	1,345					
		Width		mm	900					
		Depth		mm	320					
	Packed unit	Height		mm	1,524					
		Width		mm	980					
		Depth		mm	420					
Weight	Unit			kg	120					
	Packed unit			kg	130					
Packing	Material				Carton / EPS / Wood					
	Weight			kg	8					
Casing	Colour				Daikin White					
	Material				Painted galvanized steel plate					
Heat exchanger	Length			mm	857					
	Rows		Quantity		2					
	Fin pitch			mm	2					
	Passes		Quantity		10					
	Face area			m²	1.131					
	Stages		Quantity		60					
	Empty tubeplate hole		Quantity		0					
	Tube type				ø8 Hi-XSS					
	Fin		Type		Non-symmetric waffle louver					
			Treatment		Corrosion resistant					
Compressor	Quantity				1					
	Model				JT100G-VDL					
	Type				Hermetically sealed scroll compressor					
	Speed			rpm	6,480					
	Output			W	2,500	3,000		3,500		
	Starting method				Direct on line					
	Crankcase heater			W	33					
Fan	Type				Propeller fan					
	Discharge direction				Horizontal					
	Quantity				2					
	Air flow rate	Cooling	Nom.	m³/min	106					
		Heating	Nom.	m³/min	102	105				
Fan motor	Quantity				2					
	Model				Brushless DC motor					
	Output			W	70.00					
	Drive				Direct drive					
	Speed	Cooling	Nom.	rpm	850					
		Heating	Nom.	rpm	820	840				
Fan motor 2	Speed	Cooling	Nom.	rpm	815					
		Heating	Nom.	rpm	785	805				
Sound power level	Cooling	Nom.		dBA	66	67		69		
Sound pressure level	Cooling	Nom.		dBA	50	51		53		
	Heating	Nom.		dBA	52	53		55		

2 Specifications

2

2-1 Technical Specifications					ERQ100AV1		ERQ125AV1		ERQ140AV1	
Operation range	Cooling	Min.		°CDB	-5					
		Max.		°CDB	46					
	Heating	Min.		°CWB	-20					
		Max.		°CWB	15.5					
	On coil temperature	Heating	Min.	°CDB	10					
		Cooling	Max.	°CDB	35					
Refrigerant	Type				R-410A					
	Charge			kg	4.0					
				TCO ₂ eq	8.4					
	GWP				2,087.5					
	Control				Expansion valve (electronic type)					
	Circuits	Quantity			1					
Refrigerant oil	Type				Daphne FVC68D					
	Charged volume			l	1.5					
Piping connections	Liquid	Type			Flare connection					
		OD	mm		9.52					
	Gas	Type			Flare connection				Braze connection	
		OD	mm		15.9				19.1	
	Drain	Quantity			3					
		OD	mm		26x3					
	Piping length	OU - IU	Max.	m	55					
	Heat insulation				Both liquid and gas pipes					
	Defrost method				Reversed cycle					
Defrost control				Sensor for outdoor heat exchanger temperature						
Safety devices	Item	01			High pressure switch					
		02			Fan motor thermal protection					
		03			Inverter overload protector					
		04			PC board fuse					
PED	Category				Category I					

Standard Accessories : Installation manual; Quantity : 1;

Standard Accessories : Operation manual; Quantity : 1;

Standard Accessories : Connection pipes; Quantity : 3;

2-2 Electrical Specifications				ERQ100AV1	ERQ125AV1	ERQ140AV1
Power supply	Name			V1		
	Phase			1N~		
	Frequency		Hz	50		
	Voltage		V	220-240		
	Voltage range	Min.	%	-10		
		Max.	%	10		
Current	Nominal running current (RLA)	Cooling	A	15.9	20.2	22.2
	Maximum running current	Cooling	A	27.0		
	Starting current	Cooling	A	15.9	20.2	22.2
	Zmax	List		No requirements		
	Minimum circuit amps (MCA)		A	27.0		
	Maximum fuse amps (MFA)		A	32.0		
	Full load amps (FLA)	Fan motor	A	0.3		
		Fan motor 2	A	0.3		
Wiring connections	For power supply	Quantity		3		
		Remark		Earth wire included		
	For connection with indoor	Quantity		2		
		Remark		F1,F2		
Power supply intake				Both indoor and outdoor unit		
Field earth leakage breaker			mA	300		

4

2 Specifications

Notes

(1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m (horizontal); level difference: 0m

(2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m; level difference: 0m

Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings.

Sound values are measured in a semi-anechoic room.

RLA is based on following conditions: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB

Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.

Maximum allowable voltage range variation between phases is 2%.

Select wire size based on the value of MCA

Use a circuit breaker instead of a fuse. MFA is used to select the circuit breaker and the ground fault circuit interrupter (earth leakage circuit breaker).

MSC means the maximum current during start up of the compressor

Equipment complying with EN/IEC 61000-3-12: European/international technical standard setting the limits for harmonic currents produced by equipment connected to public low-voltage system with input current $\geq 16A$ and $\leq 75A$ per phase

Ssc: Short-circuit power

Contains fluorinated greenhouse gases

3 Options

3 - 1 Options

3

ERQ-AV1

N°	Item	ERQ100	ERQ125	ERQ140
1	Cool/heat selector	KRC19-26A6		
2	Fixing box	KJB111A		
3	Central drain plug	KKPJ5F180		

Note: all options are kits

4TW32001-4

4 Selection procedure

4 - 1 Selection Procedure

ERQ-AV1

Integrated heating capacity coefficient

The heating capacity tables do not take account of the reduction in capacity, when frost has accumulated or while the defrosting operation is in progress. The capacity values, which take these factors into account, in other words, the integrated heating capacity values, can be calculated as follows

Formula:

Integrated heating capacity = A


Value given in table of capacity characteristics = B

Integrating correction factor for frost accumulation (kW) = C

$A = B \times C$

Correction factor for finding integrated heating capacity

Inlet port temperature of heat exchanger (°C/RH 85%)	-7	-5	-3	0	3	5	7
Integrating correction factor for frost accumulation	0,88	0,86	0,8	0,75	0,76	0,82	1,0

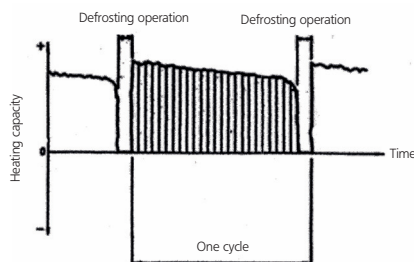

Note:

1. The figure shows that the integrated heating capacity expresses the integrated capacity for a single cycle (from defrost operation to defrost operation) in terms of time.

Please note that, when there is an accumulation of snow against the outside surface of the outdoor unit heat exchanger, there will always be a temporary reduction in capacity, although this will of course vary in degree in accordance with a number of other factors, such as the outdoor temperature (°CDB), relative humidity (RH) and the amount of frosting which occurs.

3TW30402-1

5 Combination table

5 - 1 Combination Table

5

ERQ-AV1

Combination table

		Control box		Expansion valve kit						
Outdoor unit		EKEQDCBV3	EKEQFCBV3	EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250
1 ph	ERQ100	P	P	P	P	P	P	-	-	-
	ERQ125	P	P	P	P	P	P	P	-	-
	ERQ140	P	P	-	P	P	P	P	-	-
3 ph	ERQ125	P	P	P	P	P	P	P	-	-
	ERQ200	P	P	-	-	P	P	P	P	P
	ERQ250	P	P	-	-	-	P	P	P	P

Heat pump

P: Pair: Combination depending on AHU heat exchanger volume and capacity

EKEXV Class	Allowed heat exchanger volume (dm ³)		Allowed heat exchanger capacity (kW)	
	Minimum	Maximum	Minimum	Maximum
63	1.66	2.08	6.3	7.8
80	2.09	2.64	7.9	9.9
100	2.65	3.3	10	12.3
125	3.31	4.12	12.4	15.4
140	4.13	4.62	15.5	17.6
200	4.63	6.6	17.7	24.6
250	6.61	8.25	24.7	30.8

Saturated suction temperature (SST) = 6°C, Superheat (SH)= 5K

Air temperature=27°CDB/19°CWB

If conflicting result occurs, capacity selection has priority over volume.

3TW32009-1

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ100AV1

Cooling

TC: Total capacity, kW; PI: Power Input, kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB 20.0 °CDB		16.0 °CWB 23.0 °CDB		18.0 °CWB 26.0 °CDB		19.0 °CWB 27.0 °CDB		20.0 °CWB 28.0 °CDB		22.0 °CWB 30.0 °CDB		24.0 °CWB 32.0 °CDB	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
100% 11.20 kW (100.0)	10	7.56	0.97	9.02	1.17	10.5	1.39	11.2	1.50	11.9	1.62	13.4	1.85	14.8	2.08
	12	7.56	0.99	9.02	1.20	10.5	1.42	11.2	1.53	11.9	1.65	13.4	1.88	14.8	2.12
	14	7.56	1.00	9.02	1.22	10.5	1.44	11.2	1.56	11.9	1.68	13.4	1.92	14.8	2.16
	16	7.56	1.02	9.02	1.24	10.5	1.47	11.2	1.59	11.9	1.71	13.4	1.96	14.8	2.25
	18	7.56	1.04	9.02	1.26	10.5	1.50	11.2	1.62	11.9	1.75	13.4	2.07	14.8	2.43
	20	7.56	1.06	9.02	1.29	10.5	1.55	11.2	1.70	11.9	1.87	13.4	2.22	14.8	2.61
	21	7.56	1.07	9.02	1.30	10.5	1.60	11.2	1.77	11.9	1.94	13.4	2.31	14.8	2.71
	23	7.56	1.10	9.02	1.39	10.5	1.72	11.2	1.89	11.9	2.08	13.4	2.47	14.7	2.86
	25	7.56	1.17	9.02	1.48	10.5	1.84	11.2	2.02	11.9	2.22	13.4	2.65	14.5	2.98
	27	7.56	1.25	9.02	1.58	10.5	1.96	11.2	2.17	11.9	2.38	13.4	2.84	14.3	3.11
	29	7.56	1.33	9.02	1.69	10.5	2.09	11.2	2.31	11.9	2.54	13.4	3.04	14.1	3.23
	31	7.56	1.42	9.02	1.80	10.5	2.23	11.2	2.47	11.9	2.72	13.4	3.25	13.9	3.36
	33	7.56	1.50	9.02	1.92	10.5	2.38	11.2	2.63	11.9	2.90	13.4	3.46	13.6	3.48
	35	7.56	1.60	9.02	2.04	10.5	2.54	11.2	2.81	11.9	3.09	13.2	3.59	13.4	3.61
	37	7.56	1.70	9.02	2.17	10.5	2.71	11.2	3.00	11.9	3.30	12.9	3.71	13.2	3.74
	39	7.56	1.80	9.02	2.31	10.5	2.88	11.2	3.19	11.9	3.52	12.7	3.84	13.0	3.87
90% 10.08 kW (90.0)	10	6.80	0.87	8.11	1.05	9.42	1.23	10.1	1.33	10.7	1.43	12.0	1.64	13.4	1.84
	12	6.80	0.88	8.11	1.06	9.42	1.26	10.1	1.36	10.7	1.46	12.0	1.67	13.4	1.88
	14	6.80	0.90	8.11	1.08	9.42	1.28	10.1	1.38	10.7	1.49	12.0	1.70	13.4	1.91
	16	6.80	0.91	8.11	1.10	9.42	1.30	10.1	1.41	10.7	1.51	12.0	1.73	13.4	1.95
	18	6.80	0.93	8.11	1.12	9.42	1.33	10.1	1.44	10.7	1.54	12.0	1.77	13.4	2.06
	20	6.80	0.95	8.11	1.15	9.42	1.36	10.1	1.47	10.7	1.60	12.0	1.90	13.4	2.22
	21	6.80	0.95	8.11	1.16	9.42	1.38	10.1	1.52	10.7	1.66	12.0	1.97	13.4	2.30
	23	6.80	0.97	8.11	1.20	9.42	1.48	10.1	1.62	10.7	1.78	12.0	2.11	13.4	2.47
	25	6.80	1.02	8.11	1.29	9.42	1.58	10.1	1.74	10.7	1.90	12.0	2.26	13.4	2.64
	27	6.80	1.09	8.11	1.37	9.42	1.69	10.1	1.86	10.7	2.03	12.0	2.42	13.4	2.83
	29	6.80	1.16	8.11	1.46	9.42	1.80	10.1	1.98	10.7	2.17	12.0	2.58	13.4	3.03
	31	6.80	1.23	8.11	1.56	9.42	1.92	10.1	2.11	10.7	2.32	12.0	2.76	13.4	3.24
	33	6.80	1.31	8.11	1.66	9.42	2.04	10.1	2.25	10.7	2.47	12.0	2.94	13.4	3.46
	35	6.80	1.39	8.11	1.76	9.42	2.18	10.1	2.40	10.7	2.64	12.0	3.14	13.2	3.59
	37	6.80	1.48	8.11	1.87	9.42	2.32	10.1	2.56	10.7	2.81	12.0	3.35	12.9	3.71
	39	6.80	1.57	8.11	1.99	9.42	2.47	10.1	2.72	10.7	2.99	12.0	3.57	12.7	3.84
80% 8.96 kW (80.0)	10	6.05	0.77	7.21	0.92	8.38	1.08	8.96	1.17	9.54	1.25	10.7	1.43	11.9	1.61
	12	6.05	0.78	7.21	0.94	8.38	1.10	8.96	1.19	9.54	1.27	10.7	1.45	11.9	1.64
	14	6.05	0.79	7.21	0.95	8.38	1.12	8.96	1.21	9.54	1.30	10.7	1.48	11.9	1.67
	16	6.05	0.81	7.21	0.97	8.38	1.14	8.96	1.23	9.54	1.32	10.7	1.51	11.9	1.70
	18	6.05	0.82	7.21	0.99	8.38	1.16	8.96	1.26	9.54	1.35	10.7	1.54	11.9	1.74
	20	6.05	0.84	7.21	1.01	8.38	1.19	8.96	1.28	9.54	1.38	10.7	1.60	11.9	1.86
	21	6.05	0.84	7.21	1.02	8.38	1.20	8.96	1.29	9.54	1.40	10.7	1.65	11.9	1.92
	23	6.05	0.86	7.21	1.04	8.38	1.26	8.96	1.38	9.54	1.50	10.7	1.77	11.9	2.06
	25	6.05	0.89	7.21	1.10	8.38	1.34	8.96	1.47	9.54	1.61	10.7	1.90	11.9	2.21
	27	6.05	0.94	7.21	1.18	8.38	1.43	8.96	1.57	9.54	1.72	10.7	2.03	11.9	2.36
	29	6.05	1.00	7.21	1.25	8.38	1.53	8.96	1.68	9.54	1.83	10.7	2.16	11.9	2.53
	31	6.05	1.07	7.21	1.33	8.38	1.63	8.96	1.79	9.54	1.95	10.7	2.31	11.9	2.70
	33	6.05	1.13	7.21	1.41	8.38	1.73	8.96	1.90	9.54	2.08	10.7	2.46	11.9	2.88
	35	6.05	1.20	7.21	1.50	8.38	1.84	8.96	2.02	9.54	2.22	10.7	2.63	11.9	3.07
	37	6.05	1.27	7.21	1.60	8.38	1.96	8.96	2.15	9.54	2.36	10.7	2.80	11.9	3.28
	39	6.05	1.35	7.21	1.69	8.38	2.08	8.96	2.29	9.54	2.51	10.7	2.98	11.9	3.49

4TW32002-2

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- 1 The above table shows the average value of conditions which may occur.
Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
Таблица расположенная выше показывает среднее значение условий, которые могут наступить.
Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ100AV1

Cooling

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
		20.0 °CDB	TC	23.0 °CDB	TC	26.0 °CDB	TC	27.0 °CDB	TC	28.0 °CDB	TC	30.0 °CDB	TC	32.0 °CDB	TC
70% 7.84 kW (70.0)	10	5.29	0.68	6.31	0.80	7.33	0.94	7.84	1.01	8.35	1.08	9.37	1.23	10.4	1.38
	12	5.29	0.69	6.31	0.82	7.33	0.95	7.84	1.02	8.35	1.10	9.37	1.25	10.4	1.40
	14	5.29	0.70	6.31	0.83	7.33	0.97	7.84	1.04	8.35	1.12	9.37	1.27	10.4	1.43
	16	5.29	0.71	6.31	0.84	7.33	0.99	7.84	1.06	8.35	1.14	9.37	1.30	10.4	1.46
	18	5.29	0.72	6.31	0.86	7.33	1.01	7.84	1.08	8.35	1.16	9.37	1.32	10.4	1.49
	20	5.29	0.73	6.31	0.87	7.33	1.02	7.84	1.10	8.35	1.18	9.37	1.35	10.4	1.53
	21	5.29	0.74	6.31	0.88	7.33	1.03	7.84	1.11	8.35	1.19	9.37	1.37	10.4	1.58
	23	5.29	0.75	6.31	0.90	7.33	1.06	7.84	1.15	8.35	1.25	9.37	1.47	10.4	1.70
	25	5.29	0.77	6.31	0.93	7.33	1.13	7.84	1.23	8.35	1.34	9.37	1.57	10.4	1.81
	27	5.29	0.81	6.31	0.99	7.33	1.20	7.84	1.31	8.35	1.43	9.37	1.67	10.4	1.94
	29	5.29	0.86	6.31	1.06	7.33	1.28	7.84	1.40	8.35	1.52	9.37	1.78	10.4	2.07
	31	5.29	0.91	6.31	1.12	7.33	1.36	7.84	1.49	8.35	1.62	9.37	1.90	10.4	2.21
	33	5.29	0.96	6.31	1.19	7.33	1.44	7.84	1.58	8.35	1.72	9.37	2.03	10.4	2.36
	35	5.29	1.02	6.31	1.26	7.33	1.54	7.84	1.68	8.35	1.83	9.37	2.16	10.4	2.51
	37	5.29	1.08	6.31	1.34	7.33	1.63	7.84	1.79	8.35	1.95	9.37	2.30	10.4	2.67
	39	5.29	1.14	6.31	1.42	7.33	1.73	7.84	1.90	8.35	2.07	9.37	2.44	10.4	2.85
60% 6.72 kW (60.0)	10	4.54	0.59	5.41	0.69	6.28	0.80	6.72	0.86	7.16	0.91	8.03	1.03	8.90	1.16
	12	4.54	0.60	5.41	0.70	6.28	0.81	6.72	0.87	7.16	0.93	8.03	1.05	8.90	1.18
	14	4.54	0.61	5.41	0.71	6.28	0.83	6.72	0.89	7.16	0.95	8.03	1.07	8.90	1.20
	16	4.54	0.61	5.41	0.72	6.28	0.84	6.72	0.90	7.16	0.96	8.03	1.09	8.90	1.22
	18	4.54	0.62	5.41	0.74	6.28	0.85	6.72	0.92	7.16	0.98	8.03	1.11	8.90	1.25
	20	4.54	0.63	5.41	0.75	6.28	0.87	6.72	0.93	7.16	1.00	8.03	1.13	8.90	1.27
	21	4.54	0.64	5.41	0.75	6.28	0.88	6.72	0.94	7.16	1.01	8.03	1.14	8.90	1.28
	23	4.54	0.65	5.41	0.77	6.28	0.89	6.72	0.96	7.16	1.03	8.03	1.19	8.90	1.37
	25	4.54	0.66	5.41	0.78	6.28	0.93	6.72	1.01	7.16	1.09	8.03	1.27	8.90	1.46
	27	4.54	0.68	5.41	0.83	6.28	0.99	6.72	1.07	7.16	1.16	8.03	1.35	8.90	1.56
	29	4.54	0.72	5.41	0.88	6.28	1.05	6.72	1.14	7.16	1.24	8.03	1.44	8.90	1.66
	31	4.54	0.77	5.41	0.93	6.28	1.12	6.72	1.21	7.16	1.32	8.03	1.54	8.90	1.77
	33	4.54	0.81	5.41	0.99	6.28	1.19	6.72	1.29	7.16	1.40	8.03	1.63	8.90	1.89
	35	4.54	0.86	5.41	1.05	6.28	1.26	6.72	1.37	7.16	1.49	8.03	1.74	8.90	2.01
	37	4.54	0.91	5.41	1.11	6.28	1.33	6.72	1.45	7.16	1.58	8.03	1.85	8.90	2.13
	39	4.54	0.96	5.41	1.17	6.28	1.41	6.72	1.54	7.16	1.68	8.03	1.96	8.90	2.27
50% 5.60 kW (50.0)	10	3.78	0.51	4.51	0.59	5.24	0.67	5.60	0.71	5.96	0.76	6.69	0.85	7.42	0.95
	12	3.78	0.51	4.51	0.59	5.24	0.68	5.60	0.73	5.96	0.77	6.69	0.87	7.42	0.97
	14	3.78	0.52	4.51	0.60	5.24	0.69	5.60	0.74	5.96	0.78	6.69	0.88	7.42	0.98
	16	3.78	0.53	4.51	0.61	5.24	0.70	5.60	0.75	5.96	0.80	6.69	0.90	7.42	1.00
	18	3.78	0.53	4.51	0.62	5.24	0.71	5.60	0.76	5.96	0.81	6.69	0.91	7.42	1.02
	20	3.78	0.54	4.51	0.63	5.24	0.73	5.60	0.77	5.96	0.83	6.69	0.93	7.42	1.04
	21	3.78	0.55	4.51	0.64	5.24	0.73	5.60	0.78	5.96	0.83	6.69	0.94	7.42	1.05
	23	3.78	0.55	4.51	0.65	5.24	0.74	5.60	0.80	5.96	0.85	6.69	0.96	7.42	1.07
	25	3.78	0.56	4.51	0.66	5.24	0.76	5.60	0.81	5.96	0.87	6.69	1.00	7.42	1.14
	27	3.78	0.57	4.51	0.68	5.24	0.80	5.60	0.86	5.96	0.93	6.69	1.07	7.42	1.22
	29	3.78	0.60	4.51	0.72	5.24	0.85	5.60	0.92	5.96	0.99	6.69	1.14	7.42	1.30
	31	3.78	0.64	4.51	0.76	5.24	0.90	5.60	0.97	5.96	1.05	6.69	1.21	7.42	1.38
	33	3.78	0.67	4.51	0.81	5.24	0.95	5.60	1.03	5.96	1.11	6.69	1.28	7.42	1.47
	35	3.78	0.71	4.51	0.85	5.24	1.01	5.60	1.09	5.96	1.18	6.69	1.36	7.42	1.56
	37	3.78	0.75	4.51	0.90	5.24	1.07	5.60	1.16	5.96	1.25	6.69	1.45	7.42	1.66
	39	3.78	0.79	4.51	0.95	5.24	1.13	5.60	1.22	5.96	1.32	6.69	1.53	7.42	1.76

4TW32002-2

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ125AV1

Cooling

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
		20.0 °CDB		23.0 °CDB		26.0 °CDB		27.0 °CDB		28.0 °CDB		30.0 °CDB		32.0 °CDB	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
100% 14.00 kW (125.0)	10	9.45	1.21	11.3	1.47	13.1	1.74	14.0	1.88	14.9	2.02	16.7	2.31	18.6	2.60
	12	9.45	1.23	11.3	1.49	13.1	1.77	14.0	1.91	14.9	2.06	16.7	2.35	18.6	2.65
	14	9.45	1.25	11.3	1.52	13.1	1.80	14.0	1.95	14.9	2.10	16.7	2.40	18.5	2.68
	16	9.45	1.28	11.3	1.55	13.1	1.84	14.0	1.99	14.9	2.14	16.7	2.44	18.2	2.72
	18	9.45	1.30	11.3	1.58	13.1	1.88	14.0	2.03	14.9	2.18	16.7	2.58	18.0	2.86
	20	9.45	1.32	11.3	1.61	13.1	1.93	14.0	2.13	14.9	2.34	16.7	2.78	17.7	3.00
	21	9.45	1.34	11.3	1.63	13.1	2.00	14.0	2.20	14.9	2.42	16.7	2.88	17.6	3.07
	23	9.45	1.37	11.3	1.74	13.1	2.14	14.0	2.36	14.9	2.59	16.7	3.09	17.4	3.21
	25	9.45	1.46	11.3	1.85	13.1	2.29	14.0	2.53	14.9	2.78	16.7	3.31	17.1	3.35
	27	9.45	1.56	11.3	1.98	13.1	2.45	14.0	2.70	14.9	2.97	16.5	3.47	16.9	3.49
	29	9.45	1.66	11.3	2.11	13.1	2.62	14.0	2.89	14.9	3.18	16.3	3.61	16.6	3.63
	31	9.45	1.77	11.3	2.25	13.1	2.79	14.0	3.08	14.9	3.39	16.0	3.75	16.4	3.78
	33	9.45	1.88	11.3	2.40	13.1	2.98	14.0	3.29	14.9	3.62	15.8	3.89	16.1	3.92
	35	9.45	2.00	11.3	2.55	13.1	3.17	14.0	3.51	14.9	3.86	15.5	4.03	15.9	4.06
	37	9.45	2.12	11.3	2.71	13.1	3.38	14.0	3.74	14.9	4.12	15.3	4.17	15.6	4.21
	39	9.45	2.25	11.3	2.89	13.1	3.60	14.0	3.99	14.7	4.28	15.0	4.32	15.4	4.35
90% 12.60 kW (112.5)	10	8.50	1.08	10.1	1.31	11.8	1.54	12.6	1.66	13.4	1.79	15.1	2.04	16.7	2.30
	12	8.50	1.10	10.1	1.33	11.8	1.57	12.6	1.69	13.4	1.82	15.1	2.08	16.7	2.35
	14	8.50	1.12	10.1	1.35	11.8	1.60	12.6	1.73	13.4	1.86	15.1	2.12	16.7	2.39
	16	8.50	1.14	10.1	1.38	11.8	1.63	12.6	1.76	13.4	1.89	15.1	2.16	16.7	2.44
	18	8.50	1.16	10.1	1.40	11.8	1.66	12.6	1.79	13.4	1.93	15.1	2.21	16.7	2.58
	20	8.50	1.18	10.1	1.43	11.8	1.69	12.6	1.83	13.4	2.00	15.1	2.37	16.7	2.77
	21	8.50	1.19	10.1	1.45	11.8	1.72	12.6	1.89	13.4	2.07	15.1	2.46	16.7	2.87
	23	8.50	1.22	10.1	1.51	11.8	1.85	12.6	2.03	13.4	2.22	15.1	2.63	16.7	3.08
	25	8.50	1.28	10.1	1.61	11.8	1.97	12.6	2.17	13.4	2.38	15.1	2.82	16.7	3.30
	27	8.50	1.36	10.1	1.71	11.8	2.11	12.6	2.32	13.4	2.54	15.1	3.02	16.5	3.47
	29	8.50	1.45	10.1	1.83	11.8	2.25	12.6	2.47	13.4	2.71	15.1	3.22	16.3	3.61
	31	8.50	1.54	10.1	1.94	11.8	2.40	12.6	2.64	13.4	2.90	15.1	3.44	16.0	3.75
	33	8.50	1.64	10.1	2.07	11.8	2.55	12.6	2.81	13.4	3.09	15.1	3.68	15.8	3.89
	35	8.50	1.74	10.1	2.20	11.8	2.72	12.6	3.00	13.4	3.29	15.1	3.92	15.5	4.03
	37	8.50	1.85	10.1	2.34	11.8	2.89	12.6	3.19	13.4	3.51	15.0	4.14	15.3	4.17
	39	8.50	1.96	10.1	2.49	11.8	3.08	12.6	3.40	13.4	3.74	14.7	4.28	15.0	4.31
80% 11.20 kW (100.0)	10	7.56	0.96	9.02	1.15	10.5	1.35	11.2	1.46	11.9	1.56	13.4	1.78	14.8	2.01
	12	7.56	0.98	9.02	1.17	10.5	1.38	11.2	1.48	11.9	1.59	13.4	1.82	14.8	2.05
	14	7.56	0.99	9.02	1.19	10.5	1.40	11.2	1.51	11.9	1.62	13.4	1.85	14.8	2.09
	16	7.56	1.01	9.02	1.21	10.5	1.43	11.2	1.54	11.9	1.65	13.4	1.89	14.8	2.13
	18	7.56	1.03	9.02	1.23	10.5	1.45	11.2	1.57	11.9	1.69	13.4	1.92	14.8	2.17
	20	7.56	1.05	9.02	1.26	10.5	1.48	11.2	1.60	11.9	1.72	13.4	1.99	14.8	2.32
	21	7.56	1.05	9.02	1.27	10.5	1.50	11.2	1.62	11.9	1.75	13.4	2.07	14.8	2.40
	23	7.56	1.07	9.02	1.29	10.5	1.57	11.2	1.72	11.9	1.88	13.4	2.21	14.8	2.58
	25	7.56	1.11	9.02	1.38	10.5	1.68	11.2	1.84	11.9	2.01	13.4	2.37	14.8	2.76
	27	7.56	1.18	9.02	1.47	10.5	1.79	11.2	1.96	11.9	2.14	13.4	2.53	14.8	2.95
	29	7.56	1.25	9.02	1.56	10.5	1.91	11.2	2.09	11.9	2.29	13.4	2.70	14.8	3.15
	31	7.56	1.33	9.02	1.66	10.5	2.03	11.2	2.23	11.9	2.44	13.4	2.88	14.8	3.37
	33	7.56	1.41	9.02	1.77	10.5	2.16	11.2	2.38	11.9	2.60	13.4	3.08	14.8	3.60
	35	7.56	1.50	9.02	1.88	10.5	2.30	11.2	2.53	11.9	2.77	13.4	3.28	14.8	3.84
	37	7.56	1.59	9.02	1.99	10.5	2.45	11.2	2.69	11.9	2.95	13.4	3.50	14.8	4.09
	39	7.56	1.68	9.02	2.12	10.5	2.60	11.2	2.86	11.9	3.14	13.4	3.72	14.7	4.28

4TW32002-2

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- 1 The above table shows the average value of conditions which may occur.
Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
Таблица расположенная выше показывает среднее значение условий, которые могут наступить.
Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ125AV1

Cooling

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
		20.0 °CDB	23.0 °CDB	26.0 °CDB	27.0 °CDB	28.0 °CDB	30.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB	32.0 °CDB
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
70% 9.80 kW (87.5)	10	6.61	0.84	7.89	1.00	9.16	1.17	9.80	1.26	10.4	1.35	11.7	1.53	13.0	1.72
	12	6.61	0.86	7.89	1.02	9.16	1.19	9.80	1.28	10.4	1.37	11.7	1.56	13.0	1.75
	14	6.61	0.87	7.89	1.04	9.16	1.21	9.80	1.30	10.4	1.40	11.7	1.59	13.0	1.79
	16	6.61	0.89	7.89	1.05	9.16	1.23	9.80	1.33	10.4	1.42	11.7	1.62	13.0	1.82
	18	6.61	0.90	7.89	1.07	9.16	1.26	9.80	1.35	10.4	1.45	11.7	1.65	13.0	1.86
	20	6.61	0.91	7.89	1.09	9.16	1.28	9.80	1.38	10.4	1.48	11.7	1.68	13.0	1.91
	21	6.61	0.92	7.89	1.10	9.16	1.29	9.80	1.39	10.4	1.49	11.7	1.71	13.0	1.98
	23	6.61	0.94	7.89	1.12	9.16	1.32	9.80	1.44	10.4	1.56	11.7	1.83	13.0	2.12
	25	6.61	0.96	7.89	1.17	9.16	1.41	9.80	1.54	10.4	1.67	11.7	1.96	13.0	2.27
	27	6.61	1.01	7.89	1.24	9.16	1.50	9.80	1.64	10.4	1.78	11.7	2.09	13.0	2.42
	29	6.61	1.07	7.89	1.32	9.16	1.60	9.80	1.74	10.4	1.90	11.7	2.23	13.0	2.59
	31	6.61	1.14	7.89	1.40	9.16	1.70	9.80	1.86	10.4	2.02	11.7	2.38	13.0	2.76
	33	6.61	1.20	7.89	1.49	9.16	1.80	9.80	1.97	10.4	2.15	11.7	2.53	13.0	2.94
	35	6.61	1.28	7.89	1.58	9.16	1.92	9.80	2.10	10.4	2.29	11.7	2.70	13.0	3.14
	37	6.61	1.35	7.89	1.68	9.16	2.04	9.80	2.23	10.4	2.43	11.7	2.87	13.0	3.34
	39	6.61	1.43	7.89	1.78	9.16	2.16	9.80	2.37	10.4	2.59	11.7	3.05	13.0	3.56
60% 8.40 kW (75.0)	10	5.67	0.74	6.76	0.86	7.85	1.00	8.40	1.07	8.95	1.14	10.0	1.29	11.1	1.45
	12	5.67	0.75	6.76	0.88	7.85	1.01	8.40	1.09	8.95	1.16	10.0	1.31	11.1	1.47
	14	5.67	0.76	6.76	0.89	7.85	1.03	8.40	1.11	8.95	1.18	10.0	1.34	11.1	1.50
	16	5.67	0.77	6.76	0.90	7.85	1.05	8.40	1.13	8.95	1.20	10.0	1.36	11.1	1.53
	18	5.67	0.78	6.76	0.92	7.85	1.07	8.40	1.15	8.95	1.22	10.0	1.39	11.1	1.56
	20	5.67	0.79	6.76	0.93	7.85	1.09	8.40	1.17	8.95	1.25	10.0	1.42	11.1	1.59
	21	5.67	0.80	6.76	0.94	7.85	1.10	8.40	1.18	8.95	1.26	10.0	1.43	11.1	1.60
	23	5.67	0.81	6.76	0.96	7.85	1.12	8.40	1.20	8.95	1.28	10.0	1.48	11.1	1.71
	25	5.67	0.82	6.76	0.98	7.85	1.16	8.40	1.26	8.95	1.36	10.0	1.59	11.1	1.82
	27	5.67	0.85	6.76	1.04	7.85	1.24	8.40	1.34	8.95	1.45	10.0	1.69	11.1	1.95
	29	5.67	0.91	6.76	1.10	7.85	1.31	8.40	1.43	8.95	1.55	10.0	1.80	11.1	2.07
	31	5.67	0.96	6.76	1.17	7.85	1.39	8.40	1.52	8.95	1.65	10.0	1.92	11.1	2.21
	33	5.67	1.01	6.76	1.24	7.85	1.48	8.40	1.61	8.95	1.75	10.0	2.04	11.1	2.35
	35	5.67	1.07	6.76	1.31	7.85	1.57	8.40	1.71	8.95	1.86	10.0	2.17	11.1	2.51
	37	5.67	1.13	6.76	1.39	7.85	1.67	8.40	1.82	8.95	1.97	10.0	2.31	11.1	2.67
	39	5.67	1.20	6.76	1.47	7.85	1.77	8.40	1.93	8.95	2.09	10.0	2.45	11.1	2.84
50% 7.00 kW (62.5)	10	4.72	0.63	5.63	0.73	6.54	0.84	7.00	0.89	7.46	0.95	8.37	1.06	9.28	1.19
	12	4.72	0.64	5.63	0.74	6.54	0.85	7.00	0.91	7.46	0.96	8.37	1.08	9.28	1.21
	14	4.72	0.65	5.63	0.75	6.54	0.86	7.00	0.92	7.46	0.98	8.37	1.10	9.28	1.23
	16	4.72	0.66	5.63	0.76	6.54	0.88	7.00	0.94	7.46	1.00	8.37	1.12	9.28	1.25
	18	4.72	0.67	5.63	0.78	6.54	0.89	7.00	0.95	7.46	1.01	8.37	1.14	9.28	1.27
	20	4.72	0.68	5.63	0.79	6.54	0.91	7.00	0.97	7.46	1.03	8.37	1.16	9.28	1.30
	21	4.72	0.68	5.63	0.79	6.54	0.91	7.00	0.98	7.46	1.04	8.37	1.17	9.28	1.31
	23	4.72	0.69	5.63	0.81	6.54	0.93	7.00	0.99	7.46	1.06	8.37	1.19	9.28	1.34
	25	4.72	0.70	5.63	0.82	6.54	0.95	7.00	1.01	7.46	1.09	8.37	1.25	9.28	1.43
	27	4.72	0.71	5.63	0.85	6.54	1.00	7.00	1.08	7.46	1.16	8.37	1.34	9.28	1.52
	29	4.72	0.75	5.63	0.90	6.54	1.06	7.00	1.14	7.46	1.23	8.37	1.42	9.28	1.62
	31	4.72	0.80	5.63	0.95	6.54	1.12	7.00	1.21	7.46	1.31	8.37	1.51	9.28	1.73
	33	4.72	0.84	5.63	1.01	6.54	1.19	7.00	1.29	7.46	1.39	8.37	1.60	9.28	1.83
	35	4.72	0.89	5.63	1.07	6.54	1.26	7.00	1.36	7.46	1.47	8.37	1.70	9.28	1.95
	37	4.72	0.94	5.63	1.13	6.54	1.33	7.00	1.44	7.46	1.56	8.37	1.81	9.28	2.07
	39	4.72	0.99	5.63	1.19	6.54	1.41	7.00	1.53	7.46	1.65	8.37	1.92	9.28	2.20

4TW32002-2

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ140AV1

Cooling

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
		20.0 °CDB		23.0 °CDB		26.0 °CDB		27.0 °CDB		28.0 °CDB		30.0 °CDB		32.0 °CDB	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
100% 15.50 kW (150.0)	10	10.5	1.56	12.5	1.89	14.5	2.24	15.5	2.42	16.5	2.61	18.5	2.98	20.2	3.26
	12	10.5	1.59	12.5	1.93	14.5	2.28	15.5	2.47	16.5	2.66	18.5	3.03	20.0	3.25
	14	10.5	1.62	12.5	1.96	14.5	2.33	15.5	2.52	16.5	2.71	18.5	3.09	19.7	3.23
	16	10.5	1.65	12.5	2.00	14.5	2.37	15.5	2.56	16.5	2.76	18.5	3.15	19.4	3.28
	18	10.5	1.68	12.5	2.04	14.5	2.42	15.5	2.62	16.5	2.81	18.5	3.33	19.2	3.45
	20	10.5	1.71	12.5	2.08	14.5	2.49	15.5	2.75	16.5	3.01	18.5	3.59	18.9	3.62
	21	10.5	1.72	12.5	2.10	14.5	2.58	15.5	2.85	16.5	3.12	18.4	3.67	18.8	3.70
	23	10.5	1.77	12.5	2.24	14.5	2.77	15.5	3.05	16.5	3.35	18.1	3.84	18.5	3.87
	25	10.5	1.89	12.5	2.39	14.5	2.96	15.5	3.26	16.5	3.59	17.9	4.01	18.3	4.04
	27	10.5	2.01	12.5	2.55	14.5	3.16	15.5	3.49	16.5	3.84	17.6	4.18	18.0	4.21
	29	10.5	2.14	12.5	2.72	14.5	3.38	15.5	3.73	16.5	4.10	17.4	4.35	17.7	4.38
	31	10.5	2.28	12.5	2.90	14.5	3.60	15.5	3.98	16.5	4.38	17.1	4.52	17.5	4.55
	33	10.5	2.43	12.5	3.09	14.5	3.84	15.5	4.25	16.5	4.65	16.8	4.69	17.2	4.72
	35	10.5	2.58	12.5	3.29	14.5	4.09	15.5	4.53	16.2	4.82	16.6	4.86	16.9	4.90
	37	10.5	2.74	12.5	3.50	14.5	4.36	15.5	4.83	15.9	4.99	16.3	5.03	16.7	5.07
	39	10.5	2.91	12.5	3.73	14.5	4.65	15.5	5.13	15.7	5.16	16.0	5.20	16.4	5.25
90% 13.95 kW (135.0)	10	9.41	1.40	11.2	1.69	13.0	1.99	14.0	2.15	14.9	2.31	16.7	2.64	18.5	2.97
	12	9.41	1.42	11.2	1.72	13.0	2.03	14.0	2.19	14.9	2.35	16.7	2.69	18.5	3.03
	14	9.41	1.45	11.2	1.75	13.0	2.06	14.0	2.23	14.9	2.40	16.7	2.74	18.5	3.09
	16	9.41	1.47	11.2	1.78	13.0	2.10	14.0	2.27	14.9	2.44	16.7	2.79	18.5	3.15
	18	9.41	1.50	11.2	1.81	13.0	2.14	14.0	2.32	14.9	2.49	16.7	2.85	18.5	3.32
	20	9.41	1.52	11.2	1.85	13.0	2.19	14.0	2.36	14.9	2.58	16.7	3.06	18.5	3.57
	21	9.41	1.54	11.2	1.87	13.0	2.22	14.0	2.44	14.9	2.68	16.7	3.17	18.4	3.67
	23	9.41	1.57	11.2	1.94	13.0	2.38	14.0	2.62	14.9	2.87	16.7	3.40	18.1	3.84
	25	9.41	1.65	11.2	2.07	13.0	2.55	14.0	2.80	14.9	3.07	16.7	3.64	17.9	4.01
	27	9.41	1.76	11.2	2.21	13.0	2.72	14.0	2.99	14.9	3.28	16.7	3.89	17.6	4.18
	29	9.41	1.87	11.2	2.36	13.0	2.90	14.0	3.19	14.9	3.50	16.7	4.16	17.3	4.35
	31	9.41	1.99	11.2	2.51	13.0	3.09	14.0	3.41	14.9	3.74	16.7	4.45	17.1	4.51
	33	9.41	2.11	11.2	2.67	13.0	3.29	14.0	3.63	14.9	3.99	16.5	4.65	16.8	4.68
	35	9.41	2.24	11.2	2.84	13.0	3.51	14.0	3.87	14.9	4.25	16.2	4.82	16.6	4.86
	37	9.41	2.38	11.2	3.02	13.0	3.73	14.0	4.12	14.9	4.53	16.0	4.99	16.3	5.03
	39	9.41	2.53	11.2	3.21	13.0	3.97	14.0	4.39	14.9	4.82	15.7	5.16	16.0	5.20
80% 12.40 kW (120.0)	10	8.37	1.24	10.0	1.49	11.6	1.75	12.4	1.88	13.2	2.02	14.8	2.30	16.4	2.59
	12	8.37	1.26	10.0	1.51	11.6	1.78	12.4	1.91	13.2	2.05	14.8	2.34	16.4	2.64
	14	8.37	1.28	10.0	1.54	11.6	1.81	12.4	1.95	13.2	2.09	14.8	2.39	16.4	2.69
	16	8.37	1.30	10.0	1.56	11.6	1.84	12.4	1.99	13.2	2.13	14.8	2.43	16.4	2.74
	18	8.37	1.33	10.0	1.59	11.6	1.88	12.4	2.02	13.2	2.18	14.8	2.48	16.4	2.80
	20	8.37	1.35	10.0	1.62	11.6	1.91	12.4	2.06	13.2	2.22	14.8	2.57	16.4	2.99
	21	8.37	1.36	10.0	1.64	11.6	1.93	12.4	2.09	13.2	2.26	14.8	2.67	16.4	3.10
	23	8.37	1.39	10.0	1.67	11.6	2.03	12.4	2.22	13.2	2.42	14.8	2.86	16.4	3.32
	25	8.37	1.43	10.0	1.78	11.6	2.16	12.4	2.37	13.2	2.59	14.8	3.06	16.4	3.56
	27	8.37	1.52	10.0	1.89	11.6	2.31	12.4	2.53	13.2	2.77	14.8	3.27	16.4	3.81
	29	8.37	1.62	10.0	2.02	11.6	2.46	12.4	2.70	13.2	2.95	14.8	3.49	16.4	4.07
	31	8.37	1.72	10.0	2.14	11.6	2.62	12.4	2.88	13.2	3.15	14.8	3.72	16.4	4.35
	33	8.37	1.82	10.0	2.28	11.6	2.79	12.4	3.07	13.2	3.35	14.8	3.97	16.4	4.64
	35	8.37	1.93	10.0	2.42	11.6	2.97	12.4	3.26	13.2	3.57	14.8	4.23	16.2	4.82
	37	8.37	2.05	10.0	2.57	11.6	3.16	12.4	3.47	13.2	3.80	14.8	4.51	15.9	4.98
	39	8.37	2.17	10.0	2.73	11.6	3.36	12.4	3.69	13.2	4.05	14.8	4.81	15.7	5.15

4TW32002-2

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- 1 The above table shows the average value of conditions which may occur.
Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
Таблица расположенная выше показывает среднее значение условий, которые могут наступить.
Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 1 Cooling Capacity Tables

ERQ140AV1

Cooling

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp. (°CDB)	Indoor air temp. °CWB													
		14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
		20.0 °CDB	TC	23.0 °CDB	TC	26.0 °CDB	TC	27.0 °CDB	TC	28.0 °CDB	TC	30.0 °CDB	TC	32.0 °CDB	TC
70% 10.85 kW (105.0)	10	7.32	1.09	8.73	1.29	10.1	1.51	10.9	1.62	11.6	1.74	13.0	1.98	14.4	2.22
	12	7.32	1.11	8.73	1.32	10.1	1.54	10.9	1.65	11.6	1.77	13.0	2.01	14.4	2.26
	14	7.32	1.12	8.73	1.34	10.1	1.56	10.9	1.68	11.6	1.80	13.0	2.05	14.4	2.31
	16	7.32	1.14	8.73	1.36	10.1	1.59	10.9	1.71	11.6	1.84	13.0	2.09	14.4	2.35
	18	7.32	1.16	8.73	1.38	10.1	1.62	10.9	1.74	11.6	1.87	13.0	2.13	14.4	2.40
	20	7.32	1.18	8.73	1.41	10.1	1.65	10.9	1.78	11.6	1.91	13.0	2.17	14.4	2.46
	21	7.32	1.19	8.73	1.42	10.1	1.67	10.9	1.80	11.6	1.93	13.0	2.21	14.4	2.55
	23	7.32	1.21	8.73	1.45	10.1	1.70	10.9	1.86	11.6	2.02	13.0	2.36	14.4	2.73
	25	7.32	1.23	8.73	1.51	10.1	1.82	10.9	1.98	11.6	2.16	13.0	2.52	14.4	2.92
	27	7.32	1.30	8.73	1.60	10.1	1.93	10.9	2.11	11.6	2.30	13.0	2.70	14.4	3.13
	29	7.32	1.38	8.73	1.70	10.1	2.06	10.9	2.25	11.6	2.45	13.0	2.88	14.4	3.34
	31	7.32	1.47	8.73	1.81	10.1	2.19	10.9	2.40	11.6	2.61	13.0	3.07	14.4	3.56
	33	7.32	1.55	8.73	1.92	10.1	2.33	10.9	2.55	11.6	2.78	13.0	3.27	14.4	3.80
	35	7.32	1.65	8.73	2.04	10.1	2.47	10.9	2.71	11.6	2.95	13.0	3.48	14.4	4.05
	37	7.32	1.74	8.73	2.16	10.1	2.63	10.9	2.88	11.6	3.14	13.0	3.70	14.4	4.31
	39	7.32	1.84	8.73	2.29	10.1	2.79	10.9	3.06	11.6	3.34	13.0	3.94	14.4	4.59
60% 9.30 kW (90.0)	10	6.28	0.95	7.49	1.11	8.70	1.29	9.30	1.38	9.90	1.47	11.1	1.67	12.3	1.87
	12	6.28	0.96	7.49	1.13	8.70	1.31	9.30	1.40	9.90	1.50	11.1	1.70	12.3	1.90
	14	6.28	0.98	7.49	1.15	8.70	1.33	9.30	1.43	9.90	1.52	11.1	1.73	12.3	1.94
	16	6.28	0.99	7.49	1.17	8.70	1.35	9.30	1.45	9.90	1.55	11.1	1.76	12.3	1.97
	18	6.28	1.01	7.49	1.19	8.70	1.38	9.30	1.48	9.90	1.58	11.1	1.79	12.3	2.01
	20	6.28	1.02	7.49	1.21	8.70	1.40	9.30	1.51	9.90	1.61	11.1	1.83	12.3	2.05
	21	6.28	1.03	7.49	1.22	8.70	1.42	9.30	1.52	9.90	1.63	11.1	1.84	12.3	2.07
	23	6.28	1.05	7.49	1.24	8.70	1.44	9.30	1.55	9.90	1.66	11.1	1.92	12.3	2.20
	25	6.28	1.06	7.49	1.26	8.70	1.50	9.30	1.63	9.90	1.76	11.1	2.05	12.3	2.35
	27	6.28	1.10	7.49	1.34	8.70	1.59	9.30	1.73	9.90	1.88	11.1	2.18	12.3	2.51
	29	6.28	1.17	7.49	1.42	8.70	1.69	9.30	1.84	9.90	2.00	11.1	2.32	12.3	2.68
	31	6.28	1.24	7.49	1.50	8.70	1.80	9.30	1.96	9.90	2.12	11.1	2.47	12.3	2.85
	33	6.28	1.31	7.49	1.60	8.70	1.91	9.30	2.08	9.90	2.26	11.1	2.63	12.3	3.04
	35	6.28	1.38	7.49	1.69	8.70	2.03	9.30	2.21	9.90	2.40	11.1	2.80	12.3	3.23
	37	6.28	1.46	7.49	1.79	8.70	2.15	9.30	2.34	9.90	2.55	11.1	2.98	12.3	3.44
	39	6.28	1.55	7.49	1.89	8.70	2.28	9.30	2.49	9.90	2.70	11.1	3.16	12.3	3.66
50% 7.75 kW (75.0)	10	5.23	0.82	6.24	0.94	7.25	1.08	7.75	1.15	8.25	1.22	9.26	1.37	10.3	1.53
	12	5.23	0.83	6.24	0.96	7.25	1.10	7.75	1.17	8.25	1.24	9.26	1.40	10.3	1.56
	14	5.23	0.84	6.24	0.97	7.25	1.11	7.75	1.19	8.25	1.26	9.26	1.42	10.3	1.58
	16	5.23	0.85	6.24	0.99	7.25	1.13	7.75	1.21	8.25	1.28	9.26	1.45	10.3	1.61
	18	5.23	0.86	6.24	1.00	7.25	1.15	7.75	1.23	8.25	1.31	9.26	1.47	10.3	1.64
	20	5.23	0.87	6.24	1.02	7.25	1.17	7.75	1.25	8.25	1.33	9.26	1.50	10.3	1.67
	21	5.23	0.88	6.24	1.02	7.25	1.18	7.75	1.26	8.25	1.34	9.26	1.51	10.3	1.69
	23	5.23	0.89	6.24	1.04	7.25	1.20	7.75	1.28	8.25	1.37	9.26	1.54	10.3	1.73
	25	5.23	0.91	6.24	1.06	7.25	1.22	7.75	1.31	8.25	1.41	9.26	1.62	10.3	1.84
	27	5.23	0.92	6.24	1.10	7.25	1.29	7.75	1.39	8.25	1.50	9.26	1.72	10.3	1.97
	29	5.23	0.97	6.24	1.16	7.25	1.37	7.75	1.48	8.25	1.59	9.26	1.83	10.3	2.09
	31	5.23	1.03	6.24	1.23	7.25	1.45	7.75	1.57	8.25	1.69	9.26	1.95	10.3	2.23
	33	5.23	1.09	6.24	1.30	7.25	1.54	7.75	1.66	8.25	1.79	9.26	2.07	10.3	2.37
	35	5.23	1.15	6.24	1.37	7.25	1.63	7.75	1.76	8.25	1.90	9.26	2.20	10.3	2.52
	37	5.23	1.21	6.24	1.45	7.25	1.72	7.75	1.86	8.25	2.01	9.26	2.33	10.3	2.67
	39	5.23	1.27	6.24	1.53	7.25	1.82	7.75	1.97	8.25	2.13	9.26	2.47	10.3	2.84

4TW32002-2

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ100AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp.		Indoor air temp. °CWB											
			16.0		18.0		20.0		21.0		22.0		24.0	
	°CDB	°CWB	TC kW	PI kW	TC kW	PI kW	TC kW	PI kW	TC kW	PI kW	TC kW	PI kW	TC kW	PI kW
100% 12.50 kW (100.0)	-19.8	-20.0	10.1	3.79	10.0	3.89	10.0	3.99	10.0	4.04	10.0	4.10	10.0	4.20
	-18.8	-19.0	10.4	3.85	10.4	3.95	10.3	4.04	10.3	4.09	10.3	4.14	10.3	4.24
	-16.7	-17.0	11.0	3.95	11.0	4.04	10.9	4.14	10.9	4.18	10.9	4.23	10.9	4.32
	-14.7	-15.0	11.6	4.04	11.6	4.13	11.6	4.22	11.5	4.26	11.5	4.31	10.9	4.02
	-12.6	-13.0	12.2	4.13	12.2	4.21	12.2	4.29	12.1	4.30	11.7	4.12	10.9	3.76
	-10.5	-11.0	12.8	4.20	12.8	4.28	12.5	4.21	12.1	4.03	11.7	3.86	10.9	3.53
	-9.5	-10.0	13.1	4.24	13.1	4.31	12.5	4.08	12.1	3.91	11.7	3.74	10.9	3.42
	-8.5	-9.1	13.4	4.27	13.3	4.30	12.5	3.97	12.1	3.81	11.7	3.65	10.9	3.33
	-7.0	-7.6	13.9	4.31	13.3	4.11	12.5	3.80	12.1	3.64	11.7	3.49	10.9	3.20
	-5.0	-5.6	14.1	4.19	13.3	3.89	12.5	3.59	12.1	3.45	11.7	3.31	10.9	3.03
	-3.0	-3.7	14.1	3.98	13.3	3.70	12.5	3.42	12.1	3.28	11.7	3.15	10.9	2.89
	0.0	-0.7	14.1	3.69	13.3	3.43	12.5	3.17	12.1	3.05	11.7	2.93	10.9	2.69
	3.0	2.2	14.1	3.45	13.3	3.21	12.5	2.97	12.1	2.85	11.7	2.74	10.9	2.52
	5.0	4.1	14.1	3.30	13.3	3.07	12.5	2.85	12.1	2.74	11.7	2.63	10.9	2.42
	7.0	6.0	14.1	3.17	13.3	2.95	12.5	2.74	12.1	2.64	11.7	2.53	10.9	2.33
	9.0	7.9	14.1	3.05	13.3	2.84	12.5	2.64	12.1	2.54	11.7	2.44	10.9	2.25
90% 11.25 kW (90.0)	11.0	9.8	14.1	2.94	13.3	2.74	12.5	2.54	12.1	2.45	11.7	2.35	10.9	2.17
	13.0	11.8	14.1	2.83	13.3	2.64	12.5	2.45	12.1	2.36	11.7	2.27	10.9	2.09
	15.0	13.7	14.1	2.73	13.3	2.55	12.5	2.37	12.1	2.28	11.7	2.20	10.9	2.03
	-19.8	-20.0	10.0	3.97	10.0	4.06	10.0	4.15	10.0	4.20	10.0	4.24	9.80	4.23
	-18.8	-19.0	10.3	4.02	10.3	4.11	10.3	4.20	10.3	4.24	10.3	4.29	9.80	4.06
	-16.7	-17.0	10.9	4.11	10.9	4.20	10.9	4.28	10.9	4.32	10.5	4.13	9.80	3.77
	-14.7	-15.0	11.6	4.20	11.5	4.28	11.3	4.19	10.9	4.02	10.5	3.85	9.80	3.51
	-12.6	-13.0	12.2	4.27	12.0	4.24	11.3	3.92	10.9	3.76	10.5	3.60	9.80	3.29
	-10.5	-11.0	12.7	4.29	12.0	3.98	11.3	3.67	10.9	3.53	10.5	3.38	9.80	3.10
	-9.5	-10.0	12.7	4.16	12.0	3.86	11.3	3.56	10.9	3.42	10.5	3.28	9.80	3.01
	-8.5	-9.1	12.7	4.05	12.0	3.76	11.3	3.47	10.9	3.33	10.5	3.20	9.80	2.93
	-7.0	-7.6	12.7	3.87	12.0	3.60	11.3	3.33	10.9	3.19	10.5	3.06	9.80	2.81
	-5.0	-5.6	12.7	3.66	12.0	3.40	11.3	3.15	10.9	3.03	10.5	2.91	9.80	2.67
	-3.0	-3.7	12.7	3.49	12.0	3.24	11.3	3.00	10.9	2.88	10.5	2.77	9.80	2.55
	0.0	-0.7	12.7	3.24	12.0	3.01	11.3	2.79	10.9	2.69	10.5	2.58	9.80	2.37
	80% 10.00 kW (80.0)	3.0	2.2	12.7	3.03	12.0	2.82	11.3	2.62	10.9	2.52	10.5	2.42	9.80
5.0		4.1	12.7	2.90	12.0	2.71	11.3	2.51	10.9	2.42	10.5	2.33	9.80	2.15
7.0		6.0	12.7	2.79	12.0	2.60	11.3	2.42	10.9	2.33	10.5	2.24	9.80	2.07
9.0		7.9	12.7	2.69	12.0	2.51	11.3	2.33	10.9	2.25	10.5	2.16	9.80	2.00
11.0		9.8	12.7	2.59	12.0	2.42	11.3	2.25	10.9	2.17	10.5	2.09	9.80	1.93
13.0		11.8	12.7	2.50	12.0	2.33	11.3	2.17	10.9	2.09	10.5	2.02	9.80	1.86
15.0		13.7	12.7	2.41	12.0	2.26	11.3	2.10	10.9	2.03	10.5	1.95	9.80	1.81
-19.8		-20.0	10.0	4.15	10.0	4.23	10.0	4.31	9.68	4.16	9.36	3.98	8.71	3.64
-18.8		-19.0	10.3	4.19	10.3	4.27	10.0	4.17	9.68	4.00	9.36	3.83	8.71	3.50
-16.7		-17.0	10.9	4.28	10.6	4.19	10.0	3.87	9.68	3.71	9.36	3.55	8.71	3.25
-14.7		-15.0	11.3	4.21	10.6	3.90	10.0	3.60	9.68	3.46	9.36	3.32	8.71	3.04
-12.6		-13.0	11.3	3.93	10.6	3.65	10.0	3.37	9.68	3.24	9.36	3.11	8.71	2.85
-10.5		-11.0	11.3	3.69	10.6	3.43	10.0	3.17	9.68	3.05	9.36	2.92	8.71	2.68
-9.5		-10.0	11.3	3.58	10.6	3.33	10.0	3.08	9.68	2.96	9.36	2.84	8.71	2.61
-8.5		-9.1	11.3	3.49	10.6	3.24	10.0	3.00	9.68	2.88	9.36	2.77	8.71	2.55
-7.0		-7.6	11.3	3.34	10.6	3.11	10.0	2.88	9.68	2.77	9.36	2.66	8.71	2.45
-5.0	-5.6	11.3	3.16	10.6	2.94	10.0	2.73	9.68	2.63	9.36	2.53	8.71	2.32	
-3.0	-3.7	11.3	3.01	10.6	2.81	10.0	2.61	9.68	2.51	9.36	2.41	8.71	2.22	
0.0	-0.7	11.3	2.80	10.6	2.61	10.0	2.43	9.68	2.34	9.36	2.25	8.71	2.08	
3.0	2.2	11.3	2.63	10.6	2.45	10.0	2.28	9.68	2.20	9.36	2.12	8.71	1.95	
5.0	4.1	11.3	2.52	10.6	2.36	10.0	2.19	9.68	2.11	9.36	2.04	8.71	1.88	
7.0	6.0	11.3	2.43	10.6	2.27	10.0	2.11	9.68	2.04	9.36	1.96	8.71	1.81	
9.0	7.9	11.3	2.34	10.6	2.19	10.0	2.04	9.68	1.97	9.36	1.89	8.71	1.75	
11.0	9.8	11.3	2.26	10.6	2.11	10.0	1.97	9.68	1.90	9.36	1.83	8.71	1.70	
13.0	11.8	11.3	2.18	10.6	2.04	10.0	1.90	9.68	1.84	9.36	1.77	8.71	1.64	
15.0	13.7	11.3	2.11	10.6	1.98	10.0	1.84	9.68	1.78	9.36	1.72	8.71	1.59	

4TW32002-3

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- 1 The above table shows the average value of conditions which may occur.
Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
Таблица расположена выше показывает среднее значение условий, которые могут наступить.
Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ100AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp.		Indoor air temp. °CWB															
			16.0		18.0		20.0		21.0		22.0		24.0					
			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
70% 8.75 kW (70.0)	°CDB	°CWB	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW
	-19.8	-20.0	9.87	4.27	9.31	3.96	8.75	3.66	8.47	3.51	8.19	3.36	7.63	3.08				
	-18.8	-19.0	9.87	4.10	9.31	3.80	8.75	3.52	8.47	3.38	8.19	3.24	7.63	2.97				
	-16.7	-17.0	9.87	3.80	9.31	3.53	8.75	3.27	8.47	3.14	8.19	3.01	7.63	2.76				
	-14.7	-15.0	9.87	3.55	9.31	3.30	8.75	3.05	8.47	2.93	8.19	2.82	7.63	2.59				
	-12.6	-13.0	9.87	3.32	9.31	3.09	8.75	2.86	8.47	2.75	8.19	2.64	7.63	2.43				
	-10.5	-11.0	9.87	3.12	9.31	2.91	8.75	2.70	8.47	2.59	8.19	2.49	7.63	2.30				
	-9.5	-10.0	9.87	3.03	9.31	2.82	8.75	2.62	8.47	2.52	8.19	2.42	7.63	2.23				
	-8.5	-9.1	9.87	2.96	9.31	2.75	8.75	2.56	8.47	2.46	8.19	2.37	7.63	2.18				
	-7.0	-7.6	9.87	2.84	9.31	2.64	8.75	2.46	8.47	2.37	8.19	2.27	7.63	2.10				
	-5.0	-5.6	9.87	2.69	9.31	2.51	8.75	2.34	8.47	2.25	8.19	2.16	7.63	2.00				
	-3.0	-3.7	9.87	2.57	9.31	2.40	8.75	2.23	8.47	2.15	8.19	2.07	7.63	1.91				
	0.0	-0.7	9.87	2.39	9.31	2.24	8.75	2.08	8.47	2.01	8.19	1.94	7.63	1.79				
	3.0	2.2	9.87	2.25	9.31	2.10	8.75	1.96	8.47	1.89	8.19	1.82	7.63	1.69				
	5.0	4.1	9.87	2.16	9.31	2.02	8.75	1.89	8.47	1.82	8.19	1.76	7.63	1.63				
	7.0	6.0	9.87	2.08	9.31	1.95	8.75	1.82	8.47	1.76	8.19	1.70	7.63	1.57				
	9.0	7.9	9.87	2.01	9.31	1.88	8.75	1.76	8.47	1.70	8.19	1.64	7.63	1.52				
	11.0	9.8	9.87	1.94	9.31	1.82	8.75	1.70	8.47	1.65	8.19	1.59	7.63	1.47				
	13.0	11.8	9.87	1.88	9.31	1.76	8.75	1.65	8.47	1.59	8.19	1.54	7.63	1.43				
	15.0	13.7	9.87	1.82	9.31	1.71	8.75	1.60	8.47	1.54	8.19	1.49	7.63	1.39				
60% 7.50 kW (60.0)	-19.8	-20.0	8.46	3.51	7.98	3.26	7.50	3.02	7.26	2.90	7.02	2.78	6.54	2.56				
	-18.8	-19.0	8.46	3.37	7.98	3.14	7.50	2.91	7.26	2.79	7.02	2.68	6.54	2.47				
	-16.7	-17.0	8.46	3.14	7.98	2.92	7.50	2.71	7.26	2.61	7.02	2.50	6.54	2.30				
	-14.7	-15.0	8.46	2.93	7.98	2.73	7.50	2.54	7.26	2.44	7.02	2.35	6.54	2.16				
	-12.6	-13.0	8.46	2.75	7.98	2.57	7.50	2.39	7.26	2.30	7.02	2.21	6.54	2.04				
	-10.5	-11.0	8.46	2.59	7.98	2.42	7.50	2.25	7.26	2.17	7.02	2.09	6.54	1.93				
	-9.5	-10.0	8.46	2.52	7.98	2.35	7.50	2.19	7.26	2.11	7.02	2.03	6.54	1.88				
	-8.5	-9.1	8.46	2.46	7.98	2.30	7.50	2.14	7.26	2.06	7.02	1.99	6.54	1.84				
	-7.0	-7.6	8.46	2.36	7.98	2.21	7.50	2.06	7.26	1.98	7.02	1.91	6.54	1.77				
	-5.0	-5.6	8.46	2.25	7.98	2.10	7.50	1.96	7.26	1.89	7.02	1.82	6.54	1.69				
	-3.0	-3.7	8.46	2.15	7.98	2.01	7.50	1.88	7.26	1.81	7.02	1.75	6.54	1.62				
	0.0	-0.7	8.46	2.01	7.98	1.88	7.50	1.76	7.26	1.70	7.02	1.64	6.54	1.52				
	3.0	2.2	8.46	1.89	7.98	1.77	7.50	1.66	7.26	1.60	7.02	1.55	6.54	1.44				
	5.0	4.1	8.46	1.82	7.98	1.71	7.50	1.60	7.26	1.55	7.02	1.49	6.54	1.39				
	7.0	6.0	8.46	1.76	7.98	1.65	7.50	1.55	7.26	1.49	7.02	1.44	6.54	1.34				
	9.0	7.9	8.46	1.70	7.98	1.60	7.50	1.50	7.26	1.45	7.02	1.40	6.54	1.30				
	11.0	9.8	8.46	1.64	7.98	1.55	7.50	1.45	7.26	1.40	7.02	1.35	6.54	1.26				
	13.0	11.8	8.46	1.59	7.98	1.50	7.50	1.40	7.26	1.36	7.02	1.31	6.54	1.22				
	15.0	13.7	8.46	1.54	7.98	1.45	7.50	1.36	7.26	1.32	7.02	1.28	6.54	1.19				
50% 6.25 kW (50.0)	-19.8	-20.0	7.05	2.80	6.65	2.61	6.25	2.43	6.05	2.34	5.85	2.25	5.45	2.07				
	-18.8	-19.0	7.05	2.70	6.65	2.52	6.25	2.34	6.05	2.26	5.85	2.17	5.45	2.00				
	-16.7	-17.0	7.05	2.52	6.65	2.35	6.25	2.19	6.05	2.11	5.85	2.03	5.45	1.88				
	-14.7	-15.0	7.05	2.36	6.65	2.21	6.25	2.06	6.05	1.98	5.85	1.91	5.45	1.77				
	-12.6	-13.0	7.05	2.22	6.65	2.08	6.25	1.94	6.05	1.87	5.85	1.80	5.45	1.67				
	-10.5	-11.0	7.05	2.10	6.65	1.97	6.25	1.84	6.05	1.77	5.85	1.71	5.45	1.58				
	-9.5	-10.0	7.05	2.04	6.65	1.92	6.25	1.79	6.05	1.73	5.85	1.67	5.45	1.54				
	-8.5	-9.1	7.05	2.00	6.65	1.87	6.25	1.75	6.05	1.69	5.85	1.63	5.45	1.51				
	-7.0	-7.6	7.05	1.92	6.65	1.80	6.25	1.69	6.05	1.63	5.85	1.57	5.45	1.46				
	-5.0	-5.6	7.05	1.83	6.65	1.72	6.25	1.61	6.05	1.55	5.85	1.50	5.45	1.39				
	-3.0	-3.7	7.05	1.75	6.65	1.65	6.25	1.54	6.05	1.49	5.85	1.44	5.45	1.34				
	0.0	-0.7	7.05	1.65	6.65	1.55	6.25	1.45	6.05	1.40	5.85	1.36	5.45	1.26				
	3.0	2.2	7.05	1.55	6.65	1.46	6.25	1.37	6.05	1.33	5.85	1.28	5.45	1.20				
	5.0	4.1	7.05	1.50	6.65	1.41	6.25	1.33	6.05	1.28	5.85	1.24	5.45	1.16				
	7.0	6.0	7.05	1.45	6.65	1.37	6.25	1.28	6.05	1.24	5.85	1.20	5.45	1.12				
	9.0	7.9	7.05	1.40	6.65	1.32	6.25	1.24	6.05	1.21	5.85	1.17	5.45	1.09				
	11.0	9.8	7.05	1.36	6.65	1.28	6.25	1.21	6.05	1.17	5.85	1.13	5.45	1.06				
	13.0	11.8	7.05	1.32	6.65	1.24	6.25	1.17	6.05	1.14	5.85	1.10	5.45	1.03				
	15.0	13.7	7.05	1.28	6.65	1.21	6.25	1.14	6.05	1.10	5.85	1.07	5.45	1.00				

4TW32002-3

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ125AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp.	Indoor air temp. °CWB											
		16.0		18.0		20.0		21.0		22.0		24.0	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
°CDB	°CWB	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
100%	-19.8	10.9	3.86	10.9	4.00	10.9	4.14	10.9	4.21	10.8	4.28	10.8	4.43
16.00 kW (125.0)	-18.8	11.3	3.93	11.2	4.07	11.2	4.21	11.2	4.28	11.2	4.35	11.1	4.49
	-16.7	11.9	4.08	11.9	4.21	11.9	4.34	11.8	4.40	11.8	4.47	11.8	4.60
	-14.7	12.6	4.21	12.5	4.33	12.5	4.45	12.5	4.51	12.5	4.58	12.5	4.70
	-12.6	13.2	4.32	13.2	4.44	13.2	4.56	13.2	4.61	13.1	4.67	13.1	4.79
	-10.5	13.9	4.43	13.9	4.54	13.8	4.65	13.8	4.70	13.8	4.76	13.8	4.87
	-9.5	14.2	4.47	14.2	4.58	14.2	4.69	14.1	4.75	14.1	4.80	13.9	4.82
	-8.5	14.5	4.52	14.5	4.62	14.5	4.73	14.4	4.78	14.4	4.84	13.9	4.70
	-7.0	15.0	4.58	15.0	4.69	14.9	4.79	14.9	4.84	14.9	4.89	13.9	4.50
	-5.0	15.7	4.67	15.6	4.76	15.6	4.86	15.5	4.86	15.0	4.66	13.9	4.27
	-3.0	16.3	4.74	16.3	4.83	16.0	4.82	15.5	4.62	15.0	4.43	13.9	4.07
	0.0	17.3	4.84	17.0	4.83	16.0	4.47	15.5	4.30	15.0	4.12	13.9	3.79
	3.0	18.1	4.86	17.0	4.52	16.0	4.18	15.5	4.02	15.0	3.86	13.9	3.55
	5.0	18.1	4.65	17.0	4.33	16.0	4.02	15.5	3.86	15.0	3.71	13.9	3.41
	7.0	18.1	4.47	17.0	4.16	16.0	3.86	15.5	3.71	15.0	3.57	13.9	3.28
	9.0	18.1	4.30	17.0	4.00	16.0	3.72	15.5	3.58	15.0	3.44	13.9	3.17
	11.0	18.1	4.14	17.0	3.86	16.0	3.58	15.5	3.45	15.0	3.32	13.9	3.06
	13.0	18.1	3.99	17.0	3.72	16.0	3.45	15.5	3.33	15.0	3.20	13.9	2.95
	15.0	18.1	3.85	17.0	3.59	16.0	3.34	15.5	3.22	15.0	3.10	13.9	2.86
90%	-19.8	10.9	4.11	10.8	4.23	10.8	4.36	10.8	4.43	10.8	4.49	10.77	4.62
14.40 kW (112.5)	-18.8	11.2	4.18	11.2	4.30	11.2	4.43	11.1	4.49	11.1	4.55	11.10	4.68
	-16.7	11.9	4.31	11.8	4.42	11.8	4.54	11.8	4.60	11.8	4.66	11.76	4.78
	-14.7	12.5	4.42	12.5	4.53	12.5	4.64	12.5	4.70	12.4	4.76	12.42	4.87
	-12.6	13.2	4.53	13.2	4.63	13.1	4.74	13.1	4.79	13.1	4.84	12.55	4.64
	-10.5	13.8	4.62	13.8	4.72	13.8	4.82	13.8	4.87	13.5	4.76	12.55	4.36
	-9.5	14.2	4.67	14.1	4.76	14.1	4.86	13.9	4.82	13.5	4.62	12.55	4.23
	-8.5	14.5	4.70	14.4	4.80	14.4	4.89	13.9	4.70	13.5	4.50	12.55	4.13
	-7.0	15.0	4.76	14.9	4.86	14.4	4.69	13.9	4.50	13.5	4.32	12.55	3.96
	-5.0	15.6	4.84	15.3	4.80	14.4	4.44	13.9	4.27	13.5	4.09	12.55	3.76
	-3.0	16.2	4.90	15.3	4.56	14.4	4.23	13.9	4.06	13.5	3.90	12.55	3.59
	0.0	16.3	4.56	15.3	4.24	14.4	3.93	13.9	3.78	13.5	3.64	12.55	3.34
	3.0	16.3	4.26	15.3	3.97	14.4	3.69	13.9	3.55	13.5	3.41	12.55	3.14
	5.0	16.3	4.09	15.3	3.81	14.4	3.54	13.9	3.41	13.5	3.28	12.55	3.02
	7.0	16.3	3.93	15.3	3.67	14.4	3.41	13.9	3.28	13.5	3.16	12.55	2.91
	9.0	16.3	3.79	15.3	3.53	14.4	3.29	13.9	3.16	13.5	3.05	12.55	2.81
	11.0	16.3	3.65	15.3	3.41	14.4	3.17	13.9	3.06	13.5	2.94	12.55	2.72
	13.0	16.3	3.52	15.3	3.29	14.4	3.06	13.9	2.95	13.5	2.84	12.55	2.62
	15.0	16.3	3.40	15.3	3.18	14.4	2.96	13.9	2.86	13.5	2.75	12.55	2.54
80%	-19.8	10.8	4.36	10.8	4.47	10.8	4.59	10.77	4.64	10.76	4.70	10.73	4.81
12.80 kW (100.0)	-18.8	11.2	4.42	11.1	4.53	11.1	4.64	11.10	4.70	11.08	4.75	11.06	4.86
	-16.7	11.8	4.54	11.8	4.64	11.8	4.74	11.75	4.80	11.74	4.85	11.16	4.58
	-14.7	12.5	4.64	12.4	4.74	12.4	4.84	12.39	4.87	11.98	4.67	11.16	4.28
	-12.6	13.1	4.73	13.1	4.83	12.8	4.75	12.39	4.56	11.98	4.38	11.16	4.01
	-10.5	13.8	4.82	13.6	4.83	12.8	4.47	12.39	4.29	11.98	4.12	11.16	3.78
	-9.5	14.1	4.86	13.6	4.68	12.8	4.34	12.39	4.17	11.98	4.00	11.16	3.68
	-8.5	14.4	4.89	13.6	4.56	12.8	4.23	12.39	4.06	11.98	3.90	11.16	3.59
	-7.0	14.4	4.70	13.6	4.38	12.8	4.06	12.39	3.90	11.98	3.75	11.16	3.44
	-5.0	14.4	4.46	13.6	4.15	12.8	3.85	12.39	3.70	11.98	3.56	11.16	3.27
	-3.0	14.4	4.24	13.6	3.95	12.8	3.67	12.39	3.53	11.98	3.40	11.16	3.13
	0.0	14.4	3.95	13.6	3.68	12.8	3.42	12.39	3.30	11.98	3.17	11.16	2.92
	3.0	14.4	3.70	13.6	3.45	12.8	3.21	12.39	3.10	11.98	2.98	11.16	2.75
	5.0	14.4	3.56	13.6	3.32	12.8	3.09	12.39	2.98	11.98	2.87	11.16	2.65
	7.0	14.4	3.42	13.6	3.20	12.8	2.98	12.39	2.87	11.98	2.76	11.16	2.56
	9.0	14.4	3.30	13.6	3.08	12.8	2.87	12.39	2.77	11.98	2.67	11.16	2.47
	11.0	14.4	3.18	13.6	2.98	12.8	2.78	12.39	2.68	11.98	2.58	11.16	2.39
	13.0	14.4	3.07	13.6	2.87	12.8	2.68	12.39	2.59	11.98	2.49	11.16	2.31
	15.0	14.4	2.97	13.6	2.78	12.8	2.60	12.39	2.51	11.98	2.42	11.16	2.24

4TW32002-3

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- The above table shows the average value of conditions which may occur.
Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
Таблица расположена выше показывает среднее значение условий, которые могут наступить.
Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ125AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp.		Indoor air temp. °CWB															
			16.0		18.0		20.0		21.0		22.0		24.0					
			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	°CDB	°CWB	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
70% 11.20 kW (87.5)	-19.8	-20.0	10.77	4.61	10.75	4.71	10.73	4.81	10.72	4.86	10.48	4.74	9.76	4.34				
	-18.8	-19.0	11.10	4.66	11.08	4.76	11.06	4.86	10.84	4.76	10.48	4.56	9.76	4.18				
	-16.7	-17.0	11.76	4.76	11.74	4.86	11.20	4.60	10.84	4.42	10.48	4.24	9.76	3.89				
	-14.7	-15.0	12.42	4.86	11.92	4.64	11.20	4.30	10.84	4.13	10.48	3.97	9.76	3.64				
	-12.6	-13.0	12.64	4.68	11.92	4.35	11.20	4.03	10.84	3.88	10.48	3.73	9.76	3.43				
	-10.5	-11.0	12.64	4.40	11.92	4.10	11.20	3.80	10.84	3.66	10.48	3.51	9.76	3.23				
	-9.5	-10.0	12.64	4.27	11.92	3.98	11.20	3.69	10.84	3.55	10.48	3.42	9.76	3.15				
	-8.5	-9.1	12.64	4.16	11.92	3.88	11.20	3.60	10.84	3.47	10.48	3.33	9.76	3.07				
	-7.0	-7.6	12.64	3.99	11.92	3.72	11.20	3.46	10.84	3.33	10.48	3.20	9.76	2.96				
	-5.0	-5.6	12.64	3.79	11.92	3.54	11.20	3.29	10.84	3.17	10.48	3.05	9.76	2.81				
	-3.0	-3.7	12.64	3.62	11.92	3.38	11.20	3.14	10.84	3.03	10.48	2.91	9.76	2.69				
	0.0	-0.7	12.64	3.37	11.92	3.15	11.20	2.94	10.84	2.83	10.48	2.73	9.76	2.52				
	3.0	2.2	12.64	3.17	11.92	2.96	11.20	2.76	10.84	2.67	10.48	2.57	9.76	2.38				
	5.0	4.1	12.64	3.05	11.92	2.85	11.20	2.66	10.84	2.57	10.48	2.48	9.76	2.29				
	7.0	6.0	12.64	2.94	11.92	2.75	11.20	2.57	10.84	2.48	10.48	2.39	9.76	2.22				
	9.0	7.9	12.64	2.83	11.92	2.66	11.20	2.48	10.84	2.40	10.48	2.31	9.76	2.14				
	11.0	9.8	12.64	2.74	11.92	2.57	11.20	2.40	10.84	2.32	10.48	2.24	9.76	2.08				
	13.0	11.8	12.64	2.65	11.92	2.48	11.20	2.32	10.84	2.24	10.48	2.16	9.76	2.01				
	15.0	13.7	12.64	2.56	11.92	2.41	11.20	2.25	10.84	2.18	10.48	2.10	9.76	1.95				
60% 9.60 kW (75.0)	-19.8	-20.0	10.72	4.86	10.22	4.59	9.60	4.25	9.29	4.09	8.98	3.92	8.37	3.60				
	-18.8	-19.0	10.83	4.75	10.22	4.42	9.60	4.10	9.29	3.94	8.98	3.78	8.37	3.48				
	-16.7	-17.0	10.83	4.42	10.22	4.11	9.60	3.82	9.29	3.67	8.98	3.53	8.37	3.25				
	-14.7	-15.0	10.83	4.13	10.22	3.85	9.60	3.57	9.29	3.44	8.98	3.31	8.37	3.05				
	-12.6	-13.0	10.83	3.88	10.22	3.61	9.60	3.36	9.29	3.24	8.98	3.11	8.37	2.87				
	-10.5	-11.0	10.83	3.65	10.22	3.41	9.60	3.17	9.29	3.06	8.98	2.94	8.37	2.72				
	-9.5	-10.0	10.83	3.55	10.22	3.32	9.60	3.09	9.29	2.97	8.98	2.86	8.37	2.65				
	-8.5	-9.1	10.83	3.46	10.22	3.24	9.60	3.01	9.29	2.90	8.98	2.80	8.37	2.59				
	-7.0	-7.6	10.83	3.33	10.22	3.11	9.60	2.90	9.29	2.80	8.98	2.69	8.37	2.49				
	-5.0	-5.6	10.83	3.17	10.22	2.96	9.60	2.76	9.29	2.66	8.98	2.57	8.37	2.38				
	-3.0	-3.7	10.83	3.03	10.22	2.83	9.60	2.64	9.29	2.55	8.98	2.46	8.37	2.28				
	0.0	-0.7	10.83	2.83	10.22	2.65	9.60	2.48	9.29	2.39	8.98	2.31	8.37	2.14				
	3.0	2.2	10.83	2.66	10.22	2.50	9.60	2.34	9.29	2.26	8.98	2.18	8.37	2.02				
	5.0	4.1	10.83	2.57	10.22	2.41	9.60	2.25	9.29	2.18	8.98	2.10	8.37	1.96				
	7.0	6.0	10.83	2.48	10.22	2.33	9.60	2.18	9.29	2.11	8.98	2.03	8.37	1.89				
	9.0	7.9	10.83	2.39	10.22	2.25	9.60	2.11	9.29	2.04	8.98	1.97	8.37	1.83				
	11.0	9.8	10.83	2.32	10.22	2.18	9.60	2.04	9.29	1.97	8.98	1.91	8.37	1.78				
	13.0	11.8	10.83	2.24	10.22	2.11	9.60	1.98	9.29	1.91	8.98	1.85	8.37	1.72				
	15.0	13.7	10.83	2.17	10.22	2.05	9.60	1.92	9.29	1.86	8.98	1.80	8.37	1.68				
50% 8.00 kW (62.5)	-19.8	-20.0	9.03	3.95	8.51	3.68	8.00	3.42	7.74	3.29	7.49	3.17	6.97	2.92				
	-18.8	-19.0	9.03	3.80	8.51	3.55	8.00	3.30	7.74	3.18	7.49	3.06	6.97	2.82				
	-16.7	-17.0	9.03	3.55	8.51	3.31	8.00	3.08	7.74	2.97	7.49	2.86	6.97	2.64				
	-14.7	-15.0	9.03	3.33	8.51	3.11	8.00	2.90	7.74	2.79	7.49	2.69	6.97	2.49				
	-12.6	-13.0	9.03	3.13	8.51	2.93	8.00	2.73	7.74	2.64	7.49	2.54	6.97	2.35				
	-10.5	-11.0	9.03	2.96	8.51	2.77	8.00	2.59	7.74	2.50	7.49	2.41	6.97	2.23				
	-9.5	-10.0	9.03	2.88	8.51	2.70	8.00	2.52	7.74	2.43	7.49	2.35	6.97	2.18				
	-8.5	-9.1	9.03	2.81	8.51	2.64	8.00	2.46	7.74	2.38	7.49	2.29	6.97	2.13				
	-7.0	-7.6	9.03	2.71	8.51	2.54	8.00	2.37	7.74	2.29	7.49	2.21	6.97	2.05				
	-5.0	-5.6	9.03	2.58	8.51	2.42	8.00	2.27	7.74	2.19	7.49	2.11	6.97	1.96				
	-3.0	-3.7	9.03	2.47	8.51	2.32	8.00	2.17	7.74	2.10	7.49	2.03	6.97	1.89				
	0.0	-0.7	9.03	2.32	8.51	2.18	8.00	2.04	7.74	1.98	7.49	1.91	6.97	1.78				
	3.0	2.2	9.03	2.19	8.51	2.06	8.00	1.93	7.74	1.87	7.49	1.81	6.97	1.69				
	5.0	4.1	9.03	2.11	8.51	1.99	8.00	1.87	7.74	1.81	7.49	1.75	6.97	1.63				
	7.0	6.0	9.03	2.04	8.51	1.93	8.00	1.81	7.74	1.75	7.49	1.69	6.97	1.58				
	9.0	7.9	9.03	1.98	8.51	1.86	8.00	1.75	7.74	1.70	7.49	1.64	6.97	1.54				
	11.0	9.8	9.03	1.92	8.51	1.81	8.00	1.70	7.74	1.65	7.49	1.60	6.97	1.49				
	13.0	11.8	9.03	1.86	8.51	1.75	8.00	1.65	7.74	1.60	7.49	1.55	6.97	1.45				
	15.0	13.7	9.03	1.81	8.51	1.70	8.00	1.61	7.74	1.56	7.49	1.51	6.97	1.41				

4TW32002-3

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ140AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)

Combination % kW (Capacity index)	Outdoor air temp.		Indoor air temp. °CWB															
			16.0				18.0				20.0				21.0			
			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	°CDB	°CWB	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
70% 12.60 kW (105.0)	-19.8	-20.0	10.97	4.59	10.94	4.71	10.92	4.82	10.91	4.88	10.90	4.94	10.88	5.06				
	-18.8	-19.0	11.30	4.65	11.28	4.77	11.26	4.88	11.24	4.94	11.23	5.00	10.98	4.95				
	-16.7	-17.0	11.97	4.77	11.95	4.88	11.92	4.99	11.91	5.04	11.79	5.02	10.98	4.61				
	-14.7	-15.0	12.64	4.88	12.61	4.98	12.59	5.08	12.20	4.89	11.79	4.70	10.98	4.31				
	-12.6	-13.0	13.30	4.98	13.28	5.07	12.60	4.78	12.20	4.59	11.79	4.41	10.98	4.06				
	-10.5	-11.0	13.97	5.06	13.41	4.85	12.60	4.50	12.20	4.33	11.79	4.16	10.98	3.83				
	-9.5	-10.0	14.22	5.06	13.41	4.71	12.60	4.37	12.20	4.21	11.79	4.04	10.98	3.72				
	-8.5	-9.1	14.22	4.93	13.41	4.59	12.60	4.27	12.20	4.10	11.79	3.95	10.98	3.64				
	-7.0	-7.6	14.22	4.73	13.41	4.41	12.60	4.10	12.20	3.94	11.79	3.79	10.98	3.50				
	-5.0	-5.6	14.22	4.49	13.41	4.19	12.60	3.89	12.20	3.75	11.79	3.61	10.98	3.33				
	-3.0	-3.7	14.22	4.28	13.41	4.00	12.60	3.72	12.20	3.58	11.79	3.45	10.98	3.19				
	0.0	-0.7	14.22	3.99	13.41	3.73	12.60	3.48	12.20	3.35	11.79	3.23	10.98	2.99				
	3.0	2.2	14.22	3.75	13.41	3.51	12.60	3.27	12.20	3.16	11.79	3.04	10.98	2.82				
	5.0	4.1	14.22	3.61	13.41	3.38	12.60	3.15	12.20	3.04	11.79	2.93	10.98	2.72				
	7.0	6.0	14.22	3.48	13.41	3.26	12.60	3.04	12.20	2.93	11.79	2.83	10.98	2.62				
	9.0	7.9	14.22	3.35	13.41	3.14	12.60	2.94	12.20	2.84	11.79	2.74	10.98	2.54				
	11.0	9.8	14.22	3.24	13.41	3.04	12.60	2.84	12.20	2.74	11.79	2.65	10.98	2.46				
	13.0	11.8	14.22	3.13	13.41	2.94	12.60	2.75	12.20	2.66	11.79	2.56	10.98	2.38				
	15.0	13.7	14.22	3.03	13.41	2.85	12.60	2.67	12.20	2.58	11.79	2.49	10.98	2.31				
60% 10.80 kW (90.0)	-19.8	-20.0	10.91	4.88	10.89	4.99	10.80	5.03	10.45	4.84	10.11	4.64	9.41	4.27				
	-18.8	-19.0	11.24	4.94	11.23	5.04	10.80	4.85	10.45	4.66	10.11	4.48	9.41	4.12				
	-16.7	-17.0	11.91	5.04	11.49	4.87	10.80	4.52	10.45	4.35	10.11	4.18	9.41	3.84				
	-14.7	-15.0	12.19	4.89	11.49	4.55	10.80	4.23	10.45	4.07	10.11	3.91	9.41	3.61				
	-12.6	-13.0	12.19	4.59	11.49	4.28	10.80	3.98	10.45	3.83	10.11	3.69	9.41	3.40				
	-10.5	-11.0	12.19	4.32	11.49	4.04	10.80	3.76	10.45	3.62	10.11	3.48	9.41	3.22				
	-9.5	-10.0	12.19	4.20	11.49	3.93	10.80	3.65	10.45	3.52	10.11	3.39	9.41	3.13				
	-8.5	-9.1	12.19	4.10	11.49	3.83	10.80	3.57	10.45	3.44	10.11	3.31	9.41	3.06				
	-7.0	-7.6	12.19	3.94	11.49	3.68	10.80	3.43	10.45	3.31	10.11	3.19	9.41	2.95				
	-5.0	-5.6	12.19	3.75	11.49	3.51	10.80	3.27	10.45	3.15	10.11	3.04	9.41	2.81				
	-3.0	-3.7	12.19	3.58	11.49	3.35	10.80	3.13	10.45	3.02	10.11	2.91	9.41	2.70				
	0.0	-0.7	12.19	3.35	11.49	3.14	10.80	2.93	10.45	2.83	10.11	2.73	9.41	2.53				
	3.0	2.2	12.19	3.15	11.49	2.96	10.80	2.77	10.45	2.67	10.11	2.58	9.41	2.40				
	5.0	4.1	12.19	3.04	11.49	2.85	10.80	2.67	10.45	2.58	10.11	2.49	9.41	2.31				
	7.0	6.0	12.19	2.93	11.49	2.75	10.80	2.58	10.45	2.49	10.11	2.41	9.41	2.24				
	9.0	7.9	12.19	2.83	11.49	2.66	10.80	2.49	10.45	2.41	10.11	2.33	9.41	2.17				
	11.0	9.8	12.19	2.74	11.49	2.58	10.80	2.42	10.45	2.34	10.11	2.26	9.41	2.10				
	13.0	11.8	12.19	2.65	11.49	2.50	10.80	2.34	10.45	2.26	10.11	2.19	9.41	2.04				
	15.0	13.7	12.19	2.57	11.49	2.42	10.80	2.27	10.45	2.20	10.11	2.13	9.41	1.98				
50% 9.00 kW (75.0)	-19.8	-20.0	10.16	4.67	9.58	4.36	9.00	4.05	8.71	3.90	8.42	3.75	7.84	3.46				
	-18.8	-19.0	10.16	4.50	9.58	4.20	9.00	3.91	8.71	3.76	8.42	3.62	7.84	3.34				
	-16.7	-17.0	10.16	4.20	9.58	3.92	9.00	3.65	8.71	3.52	8.42	3.39	7.84	3.13				
	-14.7	-15.0	10.16	3.94	9.58	3.68	9.00	3.43	8.71	3.31	8.42	3.18	7.84	2.95				
	-12.6	-13.0	10.16	3.71	9.58	3.47	9.00	3.23	8.71	3.12	8.42	3.01	7.84	2.78				
	-10.5	-11.0	10.16	3.50	9.58	3.28	9.00	3.06	8.71	2.96	8.42	2.85	7.84	2.64				
	-9.5	-10.0	10.16	3.41	9.58	3.19	9.00	2.98	8.71	2.88	8.42	2.78	7.84	2.58				
	-8.5	-9.1	10.16	3.33	9.58	3.12	9.00	2.92	8.71	2.82	8.42	2.72	7.84	2.52				
	-7.0	-7.6	10.16	3.21	9.58	3.01	9.00	2.81	8.71	2.71	8.42	2.62	7.84	2.43				
	-5.0	-5.6	10.16	3.06	9.58	2.87	9.00	2.68	8.71	2.59	8.42	2.50	7.84	2.33				
	-3.0	-3.7	10.16	2.93	9.58	2.75	9.00	2.57	8.71	2.49	8.42	2.40	7.84	2.23				
	0.0	-0.7	10.16	2.75	9.58	2.58	9.00	2.42	8.71	2.34	8.42	2.26	7.84	2.11				
	3.0	2.2	10.16	2.59	9.58	2.44	9.00	2.29	8.71	2.22	8.42	2.14	7.84	2.00				
	5.0	4.1	10.16	2.50	9.58	2.36	9.00	2.21	8.71	2.14	8.42	2.07	7.84	1.93				
	7.0	6.0	10.16	2.42	9.58	2.28	9.00	2.14	8.71	2.07	8.42	2.01	7.84	1.87				
	9.0	7.9	10.16	2.34	9.58	2.21	9.00	2.08	8.71	2.01	8.42	1.95	7.84	1.82				
	11.0	9.8	10.16	2.27	9.58	2.14	9.00	2.01	8.71	1.95	8.42	1.89	7.84	1.77				
	13.0	11.8	10.16	2.20	9.58	2.08	9.00	1.95	8.71	1.89	8.42	1.83	7.84	1.72				
	15.0	13.7	10.16	2.14	9.58	2.02	9.00	1.90	8.71	1.84	8.42	1.78	7.84	1.67				

4TW32002-3

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - примечания - NOTLAR

- 1 The above table shows the average value of conditions which may occur.
 Die obige Tabelle zeigt den Durchschnittswert der Bedingungen, die auftreten können.
 Στον παραπάνω πίνακα αναγράφεται η μέση τιμή για συνθήκες που μπορεί να προκύψουν.
 La tabla de arriba muestra el valor medio de condiciones que pueden ocurrir.
 Le tableau ci-dessus donne la valeur moyenne pour des conditions qui peuvent survenir.
 La tabella in alto mostra il valore delle condizioni medie che si possono riscontrare.
 De tabel hierboven geeft de gemiddelde waarde aan van situaties die kunnen voorvallen.
 Таблица расположенная выше показывает среднее значение условий, которые могут наступить.
 Yukarıdaki tablo meydana gelebilecek koşulların ortalama değerini göstermektedir.

6 Capacity tables

6 - 2 Heating Capacity Tables

ERQ140AV1

Heating

TC: Total capacity; kW; PI: Power Input; kW (Comp. + Outdoor fan motor)


Combination % kW (Capacity index)	Outdoor air temp.		Indoor air temp. °CWB											
			16.0		18.0		20.0		21.0		22.0		24.0	
			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	°CDB	°CWB	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
100% 18.00 kW (150.0)	-19.8	-20.0	11.1	3.70	11.1	3.87	11.1	4.03	11.1	4.12	11.0	4.20	11.0	4.37
	-18.8	-19.0	11.5	3.79	11.4	3.95	11.4	4.12	11.4	4.20	11.4	4.28	11.3	4.44
	-16.7	-17.0	12.1	3.96	12.1	4.11	12.1	4.27	12.1	4.34	12.0	4.42	12.0	4.58
	-14.7	-15.0	12.8	4.11	12.8	4.26	12.7	4.40	12.7	4.47	12.7	4.55	12.7	4.69
	-12.6	-13.0	13.5	4.25	13.4	4.38	13.4	4.52	13.4	4.59	13.4	4.66	13.3	4.80
	-10.5	-11.0	14.1	4.37	14.1	4.50	14.1	4.63	14.1	4.70	14.0	4.76	14.0	4.90
	-9.5	-10.0	14.5	4.43	14.4	4.56	14.4	4.68	14.4	4.75	14.4	4.81	14.3	4.94
	-8.5	-9.1	14.8	4.48	14.7	4.60	14.7	4.73	14.7	4.79	14.7	4.85	14.6	4.98
	-7.0	-7.6	15.3	4.55	15.2	4.68	15.2	4.80	15.2	4.86	15.2	4.92	15.1	5.04
	-5.0	-5.6	15.9	4.65	15.9	4.77	15.9	4.88	15.9	4.94	15.8	5.00	15.7	5.05
	-3.0	-3.7	16.6	4.74	16.5	4.85	16.5	4.96	16.5	5.02	16.5	5.07	16.4	5.12
	0.0	-0.7	17.6	4.86	17.5	4.96	17.5	5.07	17.4	5.09	16.8	4.88	15.7	4.48
	3.0	2.2	18.5	4.96	18.5	5.06	18.0	4.95	17.4	4.76	16.8	4.57	15.7	4.20
	5.0	4.1	19.2	5.03	19.1	5.12	18.0	4.75	17.4	4.57	16.8	4.39	15.7	4.04
	7.0	6.0	19.8	5.09	19.2	4.93	18.0	4.57	17.4	4.40	16.8	4.22	15.7	3.89
	9.0	7.9	20.3	5.09	19.2	4.74	18.0	4.40	17.4	4.23	16.8	4.07	15.7	3.75
	11.0	9.8	20.3	4.90	19.2	4.57	18.0	4.24	17.4	4.08	16.8	3.93	15.7	3.62
90% 16.20 kW (135.0)	13.0	11.8	20.3	4.72	19.2	4.40	18.0	4.09	17.4	3.94	16.8	3.79	15.7	3.49
	15.0	13.7	20.3	4.56	19.2	4.25	18.0	3.96	17.4	3.81	16.8	3.66	15.7	3.38
	-19.8	-20.0	11.1	3.99	11.0	4.15	11.0	4.30	11.0	4.37	11.0	4.45	10.96	4.60
	-18.8	-19.0	11.4	4.08	11.4	4.22	11.4	4.37	11.3	4.45	11.3	4.52	11.30	4.67
	-16.7	-17.0	12.1	4.23	12.1	4.37	12.0	4.51	12.0	4.58	12.0	4.65	11.97	4.79
	-14.7	-15.0	12.7	4.37	12.7	4.50	12.7	4.63	12.7	4.70	12.7	4.76	12.63	4.89
	-12.6	-13.0	13.4	4.49	13.4	4.61	13.4	4.74	13.3	4.80	13.3	4.86	13.30	4.99
	-10.5	-11.0	14.1	4.60	14.1	4.72	14.0	4.84	14.0	4.90	14.0	4.96	13.97	5.08
	-9.5	-10.0	14.4	4.65	14.4	4.77	14.4	4.88	14.3	4.94	14.3	5.00	14.12	5.01
	-8.5	-9.1	14.7	4.70	14.7	4.81	14.7	4.92	14.6	4.98	14.6	5.04	14.12	4.89
	-7.0	-7.6	15.2	4.77	15.2	4.88	15.2	4.99	15.1	5.04	15.1	5.10	14.12	4.69
	-5.0	-5.6	15.9	4.86	15.9	4.96	15.8	5.07	15.7	5.05	15.2	4.85	14.12	4.45
	-3.0	-3.7	16.5	4.93	16.5	5.03	16.2	5.01	15.7	4.81	15.2	4.62	14.12	4.25
	0.0	-0.7	17.5	5.04	17.2	5.02	16.2	4.66	15.7	4.48	15.2	4.30	14.12	3.96
	3.0	2.2	18.3	5.05	17.2	4.70	16.2	4.37	15.7	4.20	15.2	4.04	14.12	3.72
	5.0	4.1	18.3	4.84	17.2	4.51	16.2	4.19	15.7	4.04	15.2	3.88	14.12	3.58
	7.0	6.0	18.3	4.66	17.2	4.34	16.2	4.04	15.7	3.89	15.2	3.74	14.12	3.45
80% 14.40 kW (120.0)	9.0	7.9	18.3	4.48	17.2	4.18	16.2	3.89	15.7	3.75	15.2	3.61	14.12	3.33
	11.0	9.8	18.3	4.32	17.2	4.03	16.2	3.75	15.7	3.62	15.2	3.48	14.12	3.22
	13.0	11.8	18.3	4.17	17.2	3.89	16.2	3.62	15.7	3.49	15.2	3.36	14.12	3.11
	15.0	13.7	18.3	4.03	17.2	3.76	16.2	3.51	15.7	3.38	15.2	3.26	14.12	3.01
	-19.8	-20.0	11.0	4.29	11.0	4.43	11.0	4.56	10.96	4.63	10.95	4.70	10.92	4.83
	-18.8	-19.0	11.4	4.36	11.3	4.50	11.3	4.63	11.29	4.69	11.28	4.76	11.25	4.89
	-16.7	-17.0	12.0	4.50	12.0	4.62	12.0	4.75	11.96	4.81	11.95	4.87	11.92	5.00
	-14.7	-15.0	12.7	4.62	12.7	4.74	12.6	4.86	12.63	4.92	12.62	4.97	12.55	5.07
	-12.6	-13.0	13.4	4.73	13.3	4.84	13.3	4.96	13.30	5.01	13.28	5.07	12.55	4.75
	-10.5	-11.0	14.0	4.83	14.0	4.94	14.0	5.04	13.94	5.08	13.47	4.88	12.55	4.48
	-9.5	-10.0	14.4	4.88	14.3	4.98	14.3	5.09	13.94	4.94	13.47	4.74	12.55	4.35
	-8.5	-9.1	14.7	4.92	14.6	5.02	14.4	5.01	13.94	4.81	13.47	4.62	12.55	4.24
	-7.0	-7.6	15.2	4.98	15.1	5.08	14.4	4.80	13.94	4.62	13.47	4.43	12.55	4.08
	-5.0	-5.6	15.8	5.06	15.3	4.91	14.4	4.56	13.94	4.38	13.47	4.21	12.55	3.88
	-3.0	-3.7	16.3	5.03	15.3	4.68	14.4	4.35	13.94	4.18	13.47	4.02	12.55	3.70
	0.0	-0.7	16.3	4.68	15.3	4.36	14.4	4.05	13.94	3.90	13.47	3.75	12.55	3.46
	3.0	2.2	16.3	4.38	15.3	4.09	14.4	3.80	13.94	3.67	13.47	3.53	12.55	3.26
	5.0	4.1	16.3	4.21	15.3	3.93	14.4	3.66	13.94	3.53	13.47	3.40	12.55	3.14
	7.0	6.0	16.3	4.05	15.3	3.78	14.4	3.53	13.94	3.40	13.47	3.27	12.55	3.03
	9.0	7.9	16.3	3.90	15.3	3.65	14.4	3.40	13.94	3.28	13.47	3.16	12.55	2.92
	11.0	9.8	16.3	3.77	15.3	3.53	14.4	3.29	13.94	3.17	13.47	3.06	12.55	2.83
	13.0	11.8	16.3	3.64	15.3	3.40	14.4	3.18	13.94	3.06	13.47	2.95	12.55	2.74
	15.0	13.7	16.3	3.52	15.3	3.30	14.4	3.08	13.94	2.97	13.47	2.86	12.55	2.65

4TW32002-3

6 Capacity tables

6 - 3 Capacity Correction Factor

ERQ-AV1

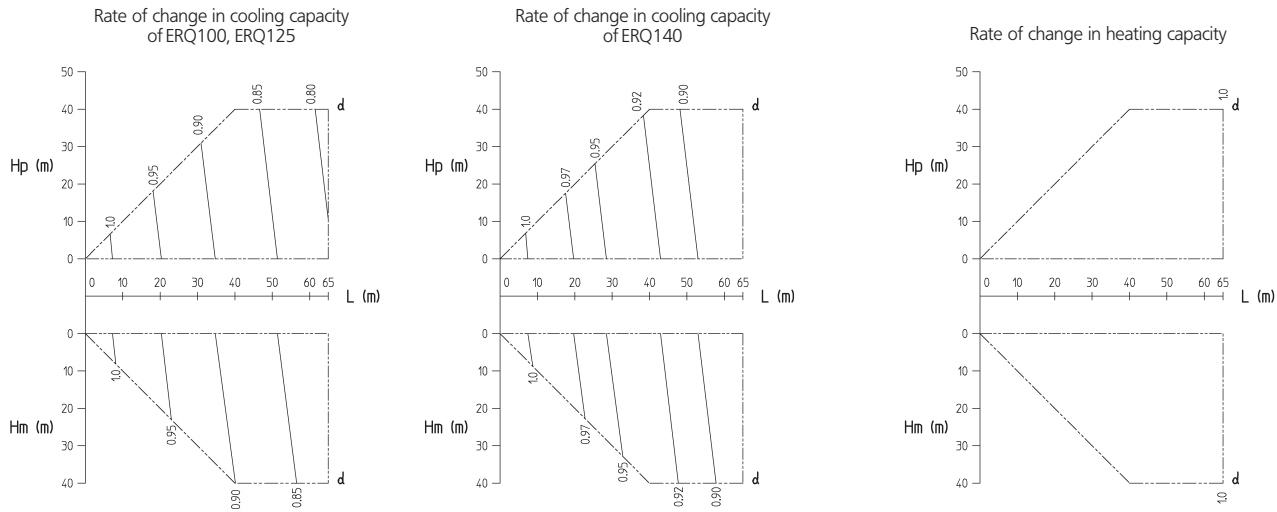

Notes:

- 1 These figures illustrate the rate of change in capacity of the system at maximum load under standard conditions.
Under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the figures above.
- 2 Method of calculating cooling capacity (max. capacity)
Cooling capacity = Cooling capacity obtained from the cooling capacity characteristics table X Capacity correction factor
- 3 Method of calculating heating capacity (max. capacity)
Heating capacity = Heating capacity obtained from the heating capacity characteristics table X Capacity correction factor

Explanation of symbols:

Hp: Level difference (m) between indoor and outdoor unit when indoor unit is installed below the outdoor unit.
Hm: Level difference (m) between indoor and outdoor unit when indoor unit is installed above the outdoor unit.
L: Equivalent piping length (m)
d: Capacity correction factor

Diameter of pipes:


Model	Gas	Liquid
ERQ100 ERQ125	φ 15.9	φ 9.5
ERQ140	φ 19.1	φ 9.5

3TW32002-1

8 Centre of gravity

8 - 1 Centre of Gravity

ERQ-AV1

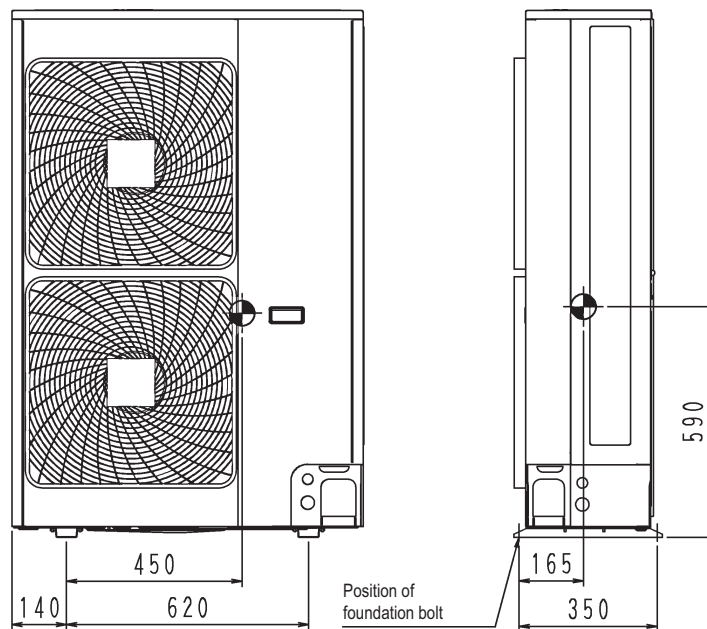


4D052604B

9 Piping diagrams

9 - 1 Piping Diagrams

9

ERQ-AV1

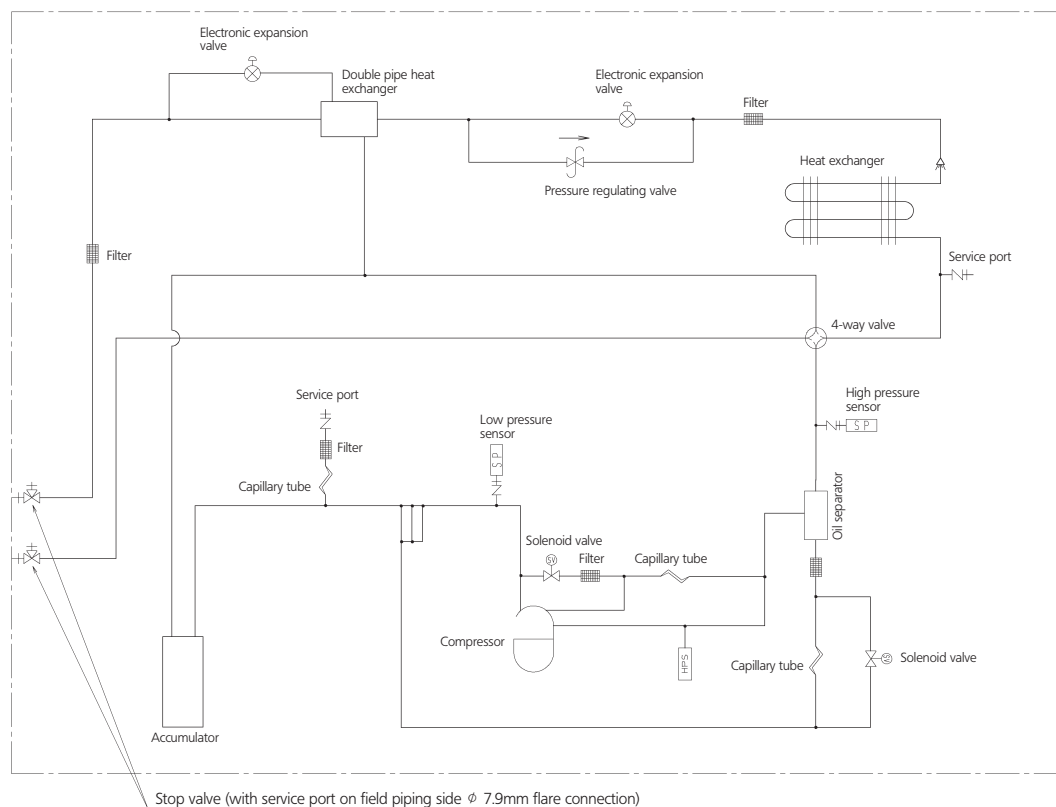


3D052712

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

ERQ-AV1

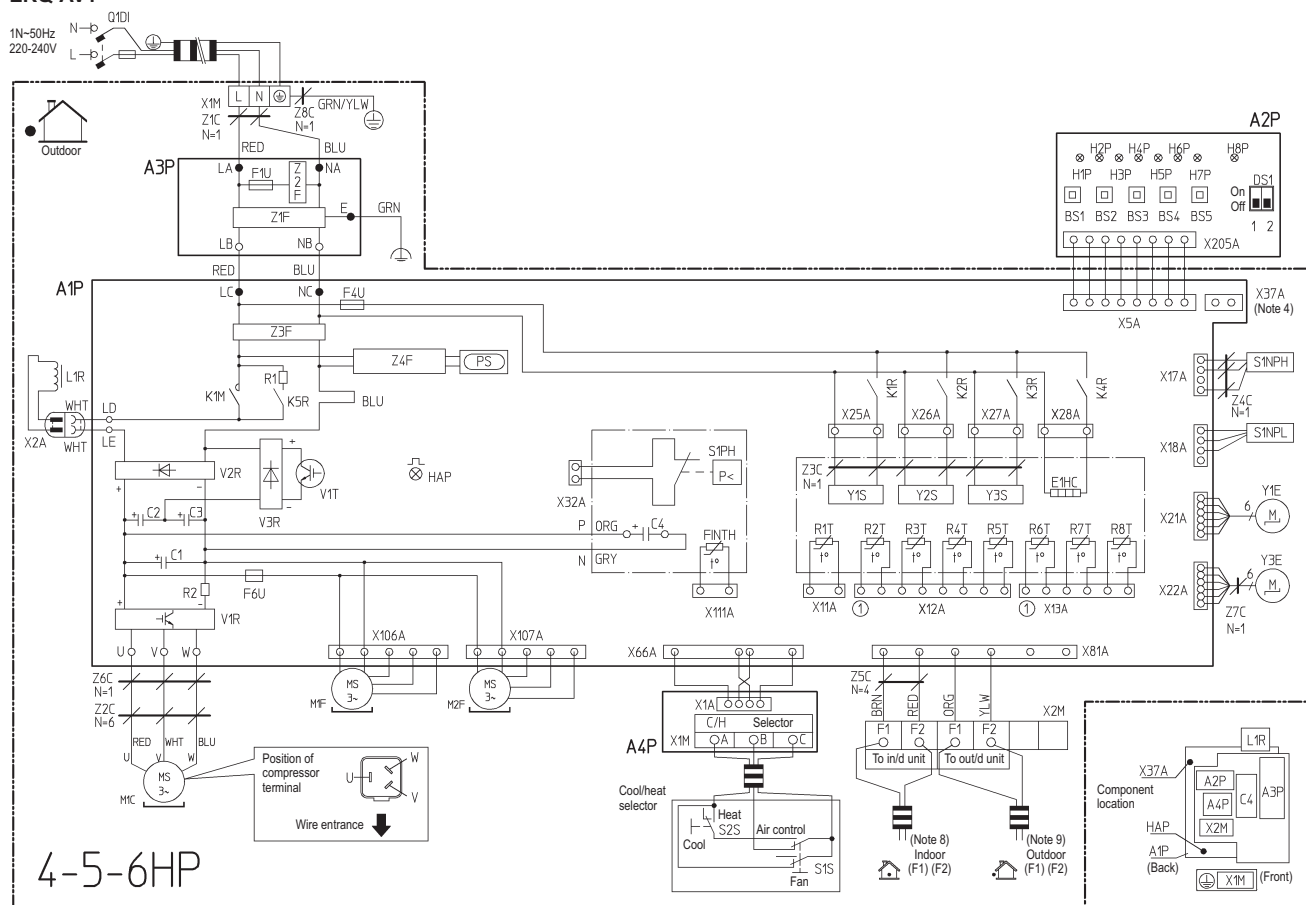

NOTES


- This wiring diagram only applies to the outdoor unit.
- L: live, N: neutral, ::-: field wiring
- : terminal strip, □: connector, ●: connection, ⊕: protective earth (screw), -: relay connector, ⊕: noiseless earth, ○: terminal
- When using the option adapter, refer to the installation manual.
- Refer to the 'wiring diagram sticker' (on back of front plate) on how to use BS1-BS5 and DS1, DS2 switch.
- Do not operate the unit by short-circuiting protection device S1PH.
- Colors: BLU=BLUE, BRN=BROWN, GRN=GREEN, RED=RED, WHT=WHITE, YLW=YELLOW, ORG=ORANGE
- Refer to the installation manual, for connection wiring to indoor-outdoor transmission F1-F2.
- When using the central control system, connect outdoor-outdoor transmission F1-F2.

2TW303761

11 External connection diagrams


11 - 1 External Connection Diagrams

11

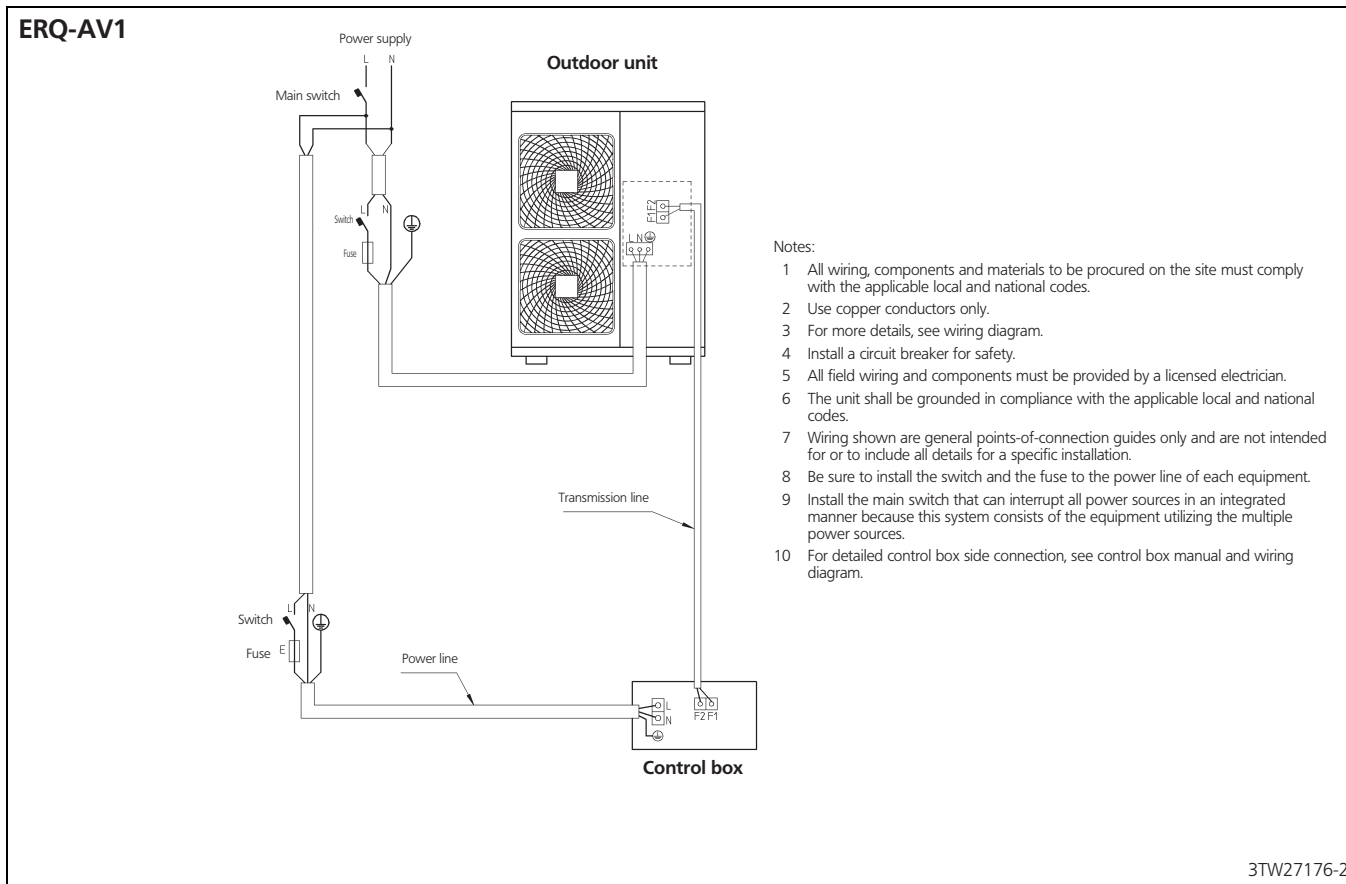


12 Sound data

12 - 1 Sound Power Spectrum

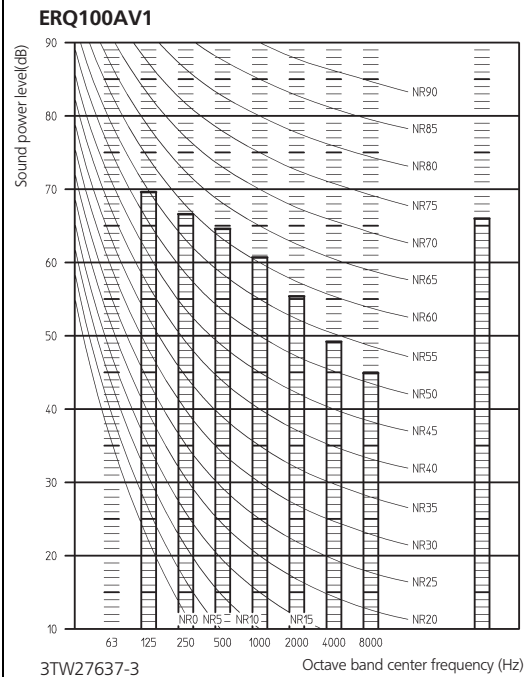


NOTES

- 1 dBA = A-weighted sound power level (A-scale according to IEC)
- 2 Reference acoustic intensity 0dB = 10E-6μW/m²
- 3 Measured according to ISO 3744

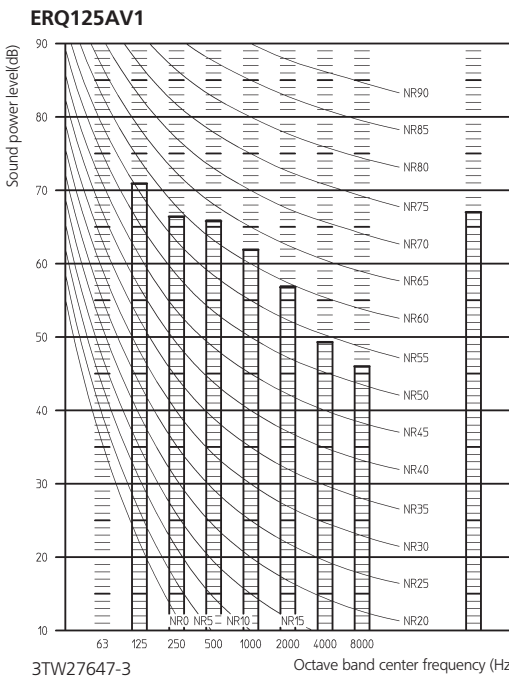

NOTES

- 1 dBA = A-weighted sound power level (A-scale according to IEC)
- 2 Reference acoustic intensity 0dB = 10E-6μW/m²
- 3 Measured according to ISO 3744

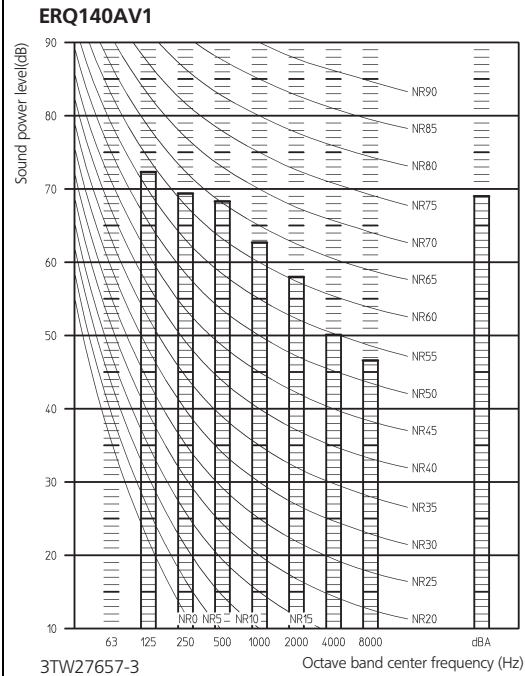

NOTES


- 1 dBA = A-weighted sound power level (A-scale according to IEC)
- 2 Reference acoustic intensity 0dB = 10E-6μW/m²
- 3 Measured according to ISO 3744

12 Sound data

12 - 2 Sound Pressure Spectrum

12


ERQ100AV1

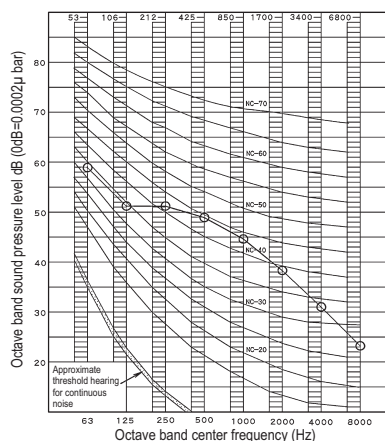

4D052713E


NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Cooling: Return air temperature: 27 °C DB, 19.0 °C WB
 - Outdoor temperature: 35 °C DB, 24 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone



Scale A	50.0
Scale C	62.0


ERQ100AV1

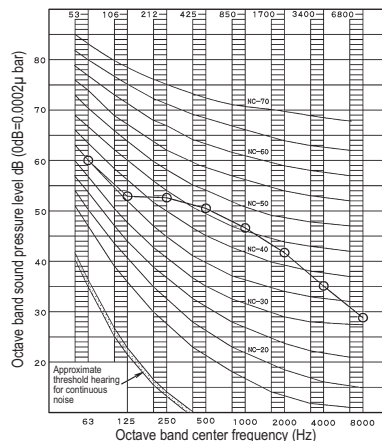

4D052719E


NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Heating: Return air temperature: 20 °C DB
 - Outdoor temperature: 7 °C DB, 6 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone



Scale A	52.0
Scale C	63.5


ERQ125AV1

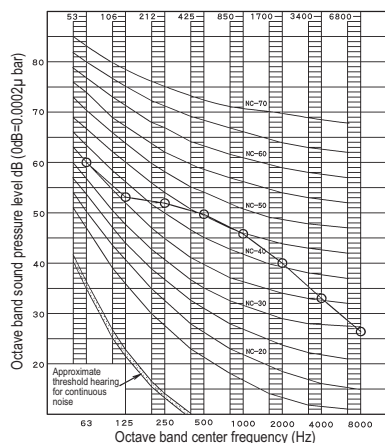

4D052714K


NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Cooling: Return air temperature: 27 °C DB, 19.0 °C WB
 - Outdoor temperature: 35 °C DB, 24 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone



Scale A	51.0
Scale C	63.5


ERQ125AV1

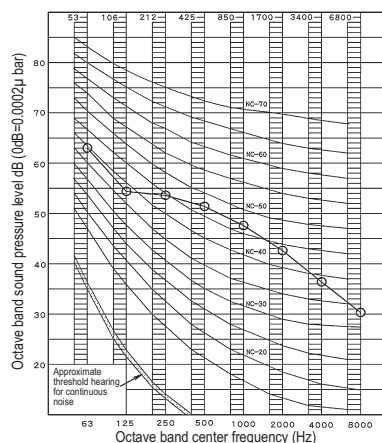

4D052718K

NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Heating: Return air temperature: 20 °C DB
 - Outdoor temperature: 7 °C DB, 6 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone




Scale A	53.0
Scale C	65.3

12 Sound data

12 - 2 Sound Pressure Spectrum


ERQ140AV1

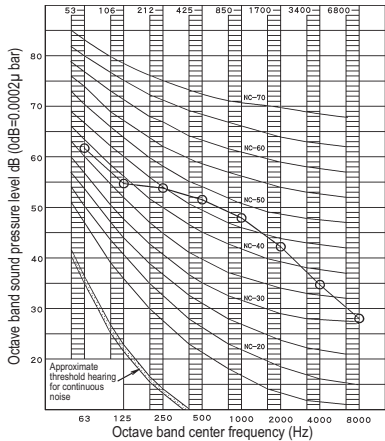

4D052716J


NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Cooling: Return air temperature: 27 °C DB, 19.0 °C WB
 - Outdoor temperature: 35 °C DB, 24 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone



Scale A	53.0
Scale C	64.5


ERQ140AV1

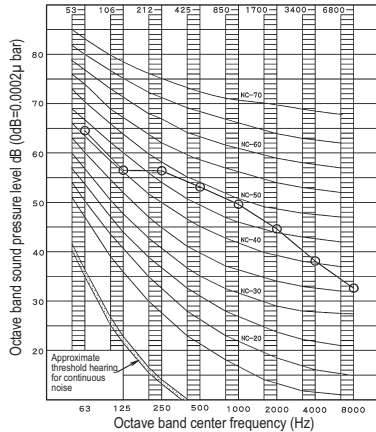

4D052717J

NOTES

- Over All (dB):
(B. G. N is already rectified)
- Operating conditions:
 - Power source: 220-240V 50Hz, 220V 60Hz
 - Heating: Return air temperature: 20 °C DB
 - Outdoor temperature: 7 °C DB, 6 °C WB
- Measuring place: anechoic chamber
- The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.
- Location of microphone



Scale A	55.0
Scale C	67.0

13 Installation

13 - 1 Installation Method

ERQ-AV1


Required installation space
The unit of the values is mm.

13


1. Where there is an obstacle on the suction side:

(a) No obstacle above

- (1) Stand-alone installation
• Obstacle on the suction side only



- Obstacle on both sides



- (2) Series installation
(2 or more)


- Obstacle on both sides




(b) Obstacle above, too

- (1) Stand-alone installation

- Obstacle on the suction side, too




- Obstacle on the suction side and both sides



- (2) Series installation
(2 or more)


- Obstacle on the suction side and both sides




2. Where there is an obstacle on the discharge side:

(a) No obstacle above

- (1) Stand-alone installation




- (2) Series installation
(2 or more)




(b) Obstacle above, too

- (1) Stand-alone installation



- (2) Series installation
(2 or more)



3. Where there are obstacles on both suction and discharge sides:


Pattern 1

Where the obstacles on the discharge side is higher than the unit:
(There is no height limit for obstructions on the intake side.)


(a) No obstacle above

- (1) Stand-alone installation

$L > H$



- (2) Series installation
(2 or more)



$L > H$


(b) Obstacle above, too

- (1) Stand-alone installation

The relation between H, A and L are as follows:

	L	A
$L \leq H$	$0 < L \leq 1/2H$	750
	$1/2H < L \leq H$	1000
$H < L$	Set the stand as: $L \leq H$	

Close the bottom of the installation frame to prevent the discharged air from being bypassed.




- (2) Series installation
(2 or more)

The relation between H, A and L are as follows:

	L	A
$L \leq H$	$0 < L \leq 1/2H$	1000
	$1/2H < L \leq H$	1250
$H < L$	Set the stand as: $L \leq H$	

Close the bottom of the installation frame to prevent the discharged air from being bypassed.



Only two units can be installed for this series.


Pattern 2

Where the obstacles on the discharge side is lower than the unit:
(There is no height limit for obstructions on the intake side.)


(a) No obstacle above

- (1) Stand-alone installation

$L \leq H$



- (2) Series installation
(2 or more)



The relation between H, A and L are as follows:

L	A
$0 < L \leq 1/2H$	250
$1/2H < L \leq H$	300


(b) Obstacle above, too

- (1) Stand-alone installation

The relation between H, A and L are as follows:

	L	A
$L \leq H$	$0 < L \leq 1/2H$	100
	$1/2H < L \leq H$	200
$H < L$	Set the stand as: $L \leq H$	

Close the bottom of the installation frame to prevent the discharged air from being bypassed.




- (2) Series installation

The relation between H, A and L are as follows:

	L	A
$L \leq H$	$0 < L \leq 1/2H$	250
	$1/2H < L \leq H$	300
$H < L$	Set the stand as: $L \leq H$	

Close the bottom of the installation frame to prevent the discharged air from being bypassed.




Only two units can be installed for this series.

4. Double-decker installation

- (a) Obstacle on the discharge side

Close the gap A (the gap between the upper and lower outdoor units) to prevent the discharged air from being bypassed.


Do not stack more than two unit.



- (b) Obstacle on the suction side


Close the gap A (the gap between the upper and lower outdoor units) to prevent the discharged air from being bypassed.

Do not stack more than two unit.



5. Multiple rows of series installation (on the rooftop, etc.)


- (a) One row of stand-alone installation



- (b) Rows of series installation
(2 or more)

The relation between H, A and L are as follows:


	L	A
$L \leq H$	$0 < L \leq 1/2H$	250
	$1/2H < L \leq H$	300
$H < L$	Cannot be installed	



14 Operation range

14 - 1 Operation Range

ERQ-AV1

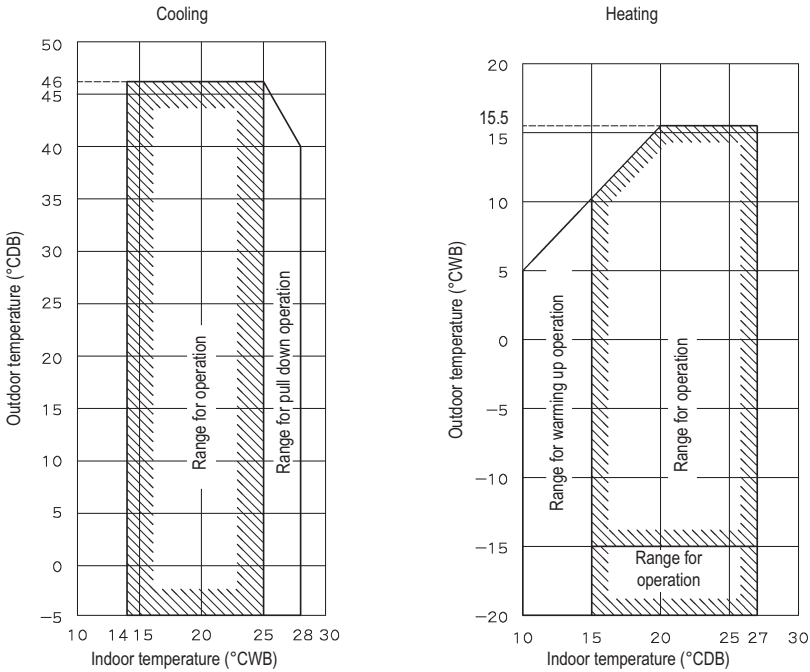


NOTES

- These figures assume the following operating conditions.
Indoor and outdoor units:
 - Equivalent pipe length: 7.5m
 - Level difference: 0m

3D045713F

Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende



EEDEN

08/16



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.