

Air Conditioning
Technical Data

FFA-A



- > FFA25A2VEB
- > FFA35A2VEB
- > FFA50A2VEB
- > FFA60A2VEB

TABLE OF CONTENTS

FFA-A

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Options	5
4	Dimensional drawings	6
5	Centre of gravity	8
6	Piping diagrams	9
7	Wiring diagrams	10
	Wiring Diagrams - Single Phase	10
8	Sound data	11
	Sound Pressure Spectrum	11
9	Air flow patterns	13
	Air Flow Pattern - Cooling	13
	Air Flow Pattern - Heating	17

1 Features

Unique design in the market that integrates fully flat into the ceiling

- Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- Unified indoor unit can be combined with R-32 and R-410A outdoor units, simplifying stock
- Combining with R-32 Bluevolution technology, reduces environmental impact with 68% compared to R-410A, leads directly to lower energy consumption thanks to its high energy efficiency and has up to lower 16% refrigerant charge
- Two optional intelligent sensors improve energy efficiency and comfort.
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 630mm lift increases flexibility and installation speed



Infrastructure cooling



Inverter



Presence & floor sensor



Home leave operation



Fan only



Draught prevention



Auto cooling-heating changeover



Whisper quiet



Ceiling soiling prevention



Individual flap control



Vertical auto swing



Fan speed steps



Dry programme



Air filter



Weekly timer



Infrared remote control



Wired remote control



Centralised control



Auto-restart



Self diagnosis



Drain pump kit



Twin/triple/double twin application



Multi model application



VRV for residential application

2 Specifications

2-1 Technical Specifications					FFA25A		FFA35A		FFA50A		FFA60A	
Casing	Material				Galvanised steel plate							
Dimensions	Unit	Height/Width/Depth		mm	260/575/575							
	Packed unit	Height/Width/Depth		mm	280/686/597							
Weight	Unit			kg	16.0				17.5			
	Packed unit			kg	18.0				19.0			
Decoration panel	Model				BYFQ60C2W1W							
	Colour				White (N9.5)							
	Dimensions	HeightxWidthxDepth		mm	46x620x620							
	Weight			kg	2.8							
Decoration panel 2	Model				BYFQ60C2W1S							
	Colour				SILVER							
	Dimensions	HeightxWidthxDepth		mm	46x620x620							
	Weight			kg	2.8							
Decoration panel 3	Model				BYFQ60B2W1							
	Colour				White (RAL9010)							
	Dimensions	HeightxWidthxDepth		mm	55x700x700							
	Weight			kg	2.7							
Decoration panel 4	Model				BYFQ60B3W1							
	Colour				WHITE (RAL9010)							
	Dimensions	HeightxWidthxDepth		mm	55x700x700							
	Weight			kg	2.7							
Heat exchanger	Inside length			mm	1,295				1,248			
	Outside length			mm	1,342							
	Rows	Quantity			2				3			
	Fin pitch			mm	1.20							
	Passes	Quantity			5				7			
	Face area			m²	0.29				0.30			
	Stages	Quantity			12				16			
	Empty tubeplate hole	Quantity			0							
	Fin	Type			Cross fin coil (multi slit fins and hi-XA tubes)							
Air filter	Type				Resin net							
Fan	Model				QTS32D15M							
	Type				Turbo fan							
	Quantity				1							
	Air flow rate	Cooling	High	m³/min	9.0	10.0		12.0		14.5		
				cfm	318	353		424		512		
			Medium	m³/min	8.0	8.5		10.0		12.5		
				cfm	282	300		353		442		
			Low	m³/min	6.5			7.5			9.5	
				cfm	230			265			336	
		Heating	High	m³/min	9.0	10.0		12.0		14.5		
				cfm	318	353		424		512		
Medium	m³/min		8.0	8.5		10.0		12.5				
	cfm		282	300		353		442				
Low	m³/min	6.5			7.5			9.5				
	cfm	230			265			336				

2 Specifications

2-1 Technical Specifications					FFA25A	FFA35A	FFA50A	FFA60A
Fan motor	Quantity				1			
	Model				ARW5204DK			
	Speed	Steps			3			
		Cooling	High/ Low	rpm	653/447		748/481	900/581
		Heating	High/ Low	rpm	653/447		748/481	900/581
	Output	High		W	50			
Sound power level	Cooling			dBA	48	51	56	60
	Heating			dBA	-			
Sound pressure level	Cooling	High/Medium/ Low	dBA	31.0/28.5/25.0	34.0/30.5/25.0	39.0/34.0/27.0	43.0/40.0/32.0	
	Heating	High/Medium/ Low	dBA	31.0/28.5/25.0	34.0/30.5/25.0	39.0/34.0/27.0	43.0/40.0/32.0	
Control systems	Infrared remote control				BRC7EB530W (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)			
	Wired remote control				BRC1D528 / BRC1E53A7 / BRC1E53B7 / BRC1E53C7			
Refrigerant	Type				R-32 / R-410A			
Piping connections	Sound absorbing insulation				Foamed polyurethane			
	Liquid	Type/OD	mm	Flare connection/6,35				
	Gas	Type/OD	mm	Flare connection/9.52		Flare connection/12.70		
	Drain				VP20 (I.D. 20/O.D. 26)			
	Heat insulation				Foamed polystyrene/polyethylene			

Standard Accessories : Installation and operation manual; Quantity : 1;

Standard Accessories : Drain hose; Quantity : 1;

Standard Accessories : Hose band; Quantity : 1;

Standard Accessories : Washer for hanger bracket; Quantity : 8;

Standard Accessories : Screws; Quantity : 4;

Standard Accessories : Thermal insulation tube; Quantity : 2;

Standard Accessories : Sealing material; Quantity : 4;

Standard Accessories : Tie-wraps; Quantity : 7;

2-2 Electrical Specifications				FFA25A	FFA35A	FFA50A	FFA60A
Power supply	Phase			1~			
	Frequency		Hz	50			
	Voltage		V	220-240			

Options

Options

FFA-A

Option kit	Product name	New/Existing	Compatibility				Availability	
			BYFG08ZV1 BYFG08ZV1	BYFG08ZV1W BYFG08ZV1W	BYFG08ZV1S BYFG08ZV1S	BYFG08ZV1S BYFG08ZV1S	SA	FFA2SA2VEB FFA3SA2VEB FFA6SA2VEB
Decoration panel - Standard	BYFG08ZV1	New	-	-	-	-	✓	✓
Decoration panel - Standard	BYFG08ZV1	New	-	-	-	-	✓	✓
Decoration panel - White	BYFG08ZV1W	New	-	-	-	-	✓	✓
Decoration panel - Silver	BYFG08ZV1S	New	-	-	-	-	✓	✓
Sensor kit - White	BYFG08ZV1(3)	New	No	Yes	No	No	✓	✓
Sensor kit - Silver	BYFG08ZV1S(3)	New	No	No	Yes	Yes	✓	✓
Air discharge outlet sealing member	BSB044C60	New	Yes	Yes	Yes	Yes	✓	✓
Panel spacer	R08044B00	Existing	Yes	No	No	No	✓	✓
Long-life replacement filter	KAF0441B00	Existing	Yes	Yes	Yes	Yes	✓	✓
Fresh air intake kit	R08044C60	Existing	Yes	Yes	Yes	Yes	✓	✓
Remote control Infrared type HP	BRC7E530W(1/2)	New	Yes	No	No	No	✓	✓
Remote control Infrared type HP White	BRC7E530W(1/2)	New	No	Yes	No	No	✓	✓
Remote control Infrared type HP Silver	BRC7E530S(1/2)	New	No	No	Yes	Yes	✓	✓
Wired remote control	BRC10528(2)	Existing	Yes	Yes	Yes	Yes	✓	✓
Wired remote control	BRC1ES3A7(8)/BRC1ES3B7(9)/BRC1ES3C7(10/11)	Existing	Yes	Yes	Yes	Yes	✓	✓
Simplified remote control (with operation mode selector button)	BRC1ES3C7(10)	New	Yes	Yes	Yes	Yes	✓	✓
Simplified remote control (without operation mode selector button)	BRC1ES3C7(10)	New	Yes	Yes	Yes	Yes	✓	✓
Central remote control	DC3302B51	Existing	Yes	Yes	Yes	Yes	✓	✓
Unified ON/OFF controller	DC3301B51	Existing	Yes	Yes	Yes	Yes	✓	✓
Schedule timer	UST01B54	Existing	Yes	Yes	Yes	Yes	✓	✓
Wiring adaptor for electrical appendices	KRP1B57	Existing	Yes	Yes	Yes	Yes	✓	✓
Wiring adaptor for electrical appendices	KRP4A53	Existing	Yes	Yes	Yes	Yes	✓	✓
Wiring adaptor (hour meter)	KRP1B57	Existing	Yes	Yes	Yes	Yes	✓	✓
Installation box for adaptor PCB	KRP1B101, KRP1BA101	Existing	Yes	Yes	Yes	Yes	✓	✓
Remote sensor	KRC501-4B	Existing	Yes	Yes	Yes	Yes	✓	✓
Touch Controller	DC3601C31	Existing	Yes	Yes	Yes	Yes	✓	✓
Centralised control systems	DC3601A31	Existing	Yes	Yes	Yes	Yes	✓	✓
Intelligent touch controller	DC3601A3A	Existing	Yes	Yes	Yes	Yes	✓	✓
Digital input adaptor	BRPTA31(6)	New	Yes	Yes	Yes	Yes	✓	✓

- ①: The sensing function is not available.
 ②: The independently-controllable-flaps function is not available.
 ③: This option cannot be used with RR and RQ models.
 ④: The independently-controllable-flaps function is not available in combination with RR and RQ models.
 ⑤: Included languages are:
 Language pack 1: English, German, French, Dutch, Spanish, Italian, and Portuguese.
 With PC cable EKPCAB3 in combination with the Updater PC software, you can additionally change the language to:
 Language pack 3: English, Greek, Polish, Russian, Serbian, Slovak, and Turkish.
 Language pack 2: English, Bulgarian, Croatian, Czech, Hungarian, Romanian, and Slovenian.
 ⑥: Only possible in combination with remote control BRC2/3E52C, BRC1E53A/B/C7.
 ⑦: Requires installation box for adaptor PCB.
 ⑧: Included languages are: English, German, French, Italian, Spanish, Portuguese, and Dutch.
 ⑨: Included languages are: English, Czech, Croatian, Hungarian, Slovenian, Romanian, and Bulgarian.
 ⑩: Included languages are: English, Russian, Greek, Turkish, Polish, Albanian, and Slovak.
 ⑪: Language pack 3 of controller BRC1E53C7 is different from that of controller BRC2/3E52C7.


3D106135

4 Dimensional drawings

4 - 1 Dimensional Drawings

FFA25-35A

• DECORATION PANEL

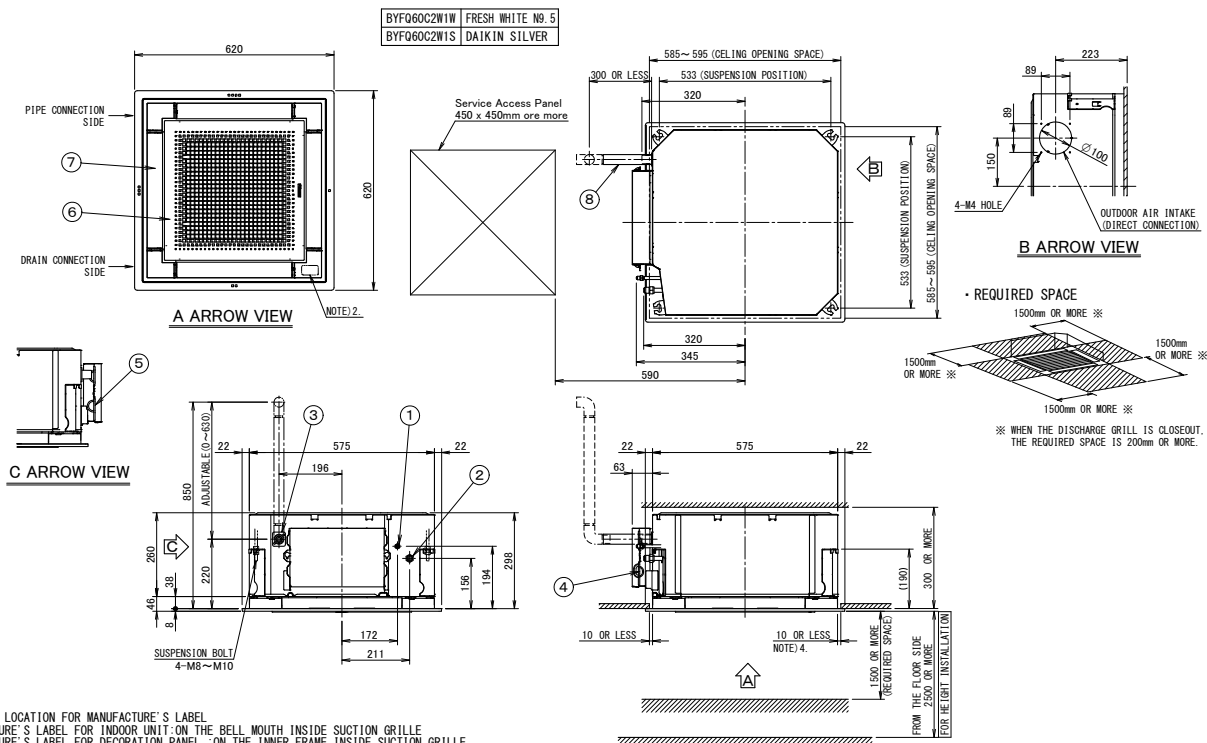


NOTE) 1. STICKING LOCATION FOR MANUFACTURE'S LABEL
MANUFACTURE'S LABEL FOR INDOOR UNIT: ON THE BELL MOUTH INSIDE SUCTION GRILLE
MANUFACTURE'S LABEL FOR DECORATION PANEL: ON THE INNER FRAME INSIDE SUCTION GRILLE
2. IN CASE OF USING WIRELESS REMOTE CONTROLLER THIS POSITION WILL BE A SIGNAL RECEIVER.
REFER TO THE DRAWING OF WIRELESS REMOTE CONTROLLER IN DETAIL.
3. WHEN THE TEMPERATURE AND HUMIDITY IN THE CEILING EXCEED 30°C AND RH 80% OR THE FRESH AIR IS INDUCED INTO THE CEILING OR THE UNIT CONTINUES 24 HOUR OPERATION, AN ADDITIONAL INSULATION (THICKNESS 10mm OR MORE OF GLASSWOOL OR POLYETHYLENE FOAM) IS REQUIRED.
4. THOUGH THE INSTALLATION IS ACCEPTABLE UP TO MAXIMUM OF 595mm SQUARE CEILING OPENING. KEEP THE CLEARANCE OF 10mm OR LESS BETWEEN THE MAIN UNIT AND THE CEILING OPENING SO THAT THE PANEL OVERLAP ALLOWANCE CAN BE ENSURED.

ITEM	PART NAME	REMARK	ITEM	PART NAME	REMARK
1	LIQUID PIPE CONNECTION	φ6.4 (FLARE CONNECTION)	5	REMOTE CONTROL CODE AND CONTROL WIRING CONNECTION	
2	GAS PIPE CONNECTION	φ9.5 (FLARE CONNECTION)	6	AIR DISCHARGE GRILL	
3	DRAIN PIPE CONNECTION	VP20 (O.D. φ25)	7	SUCTION GRILL	
4	POWER SUPPLY CONNECTION		8	DRAIN HOSE (ACCESSORY) I.D. φ25 (OUTLET)	

3D082433

FFA25-35A

Decoration panel

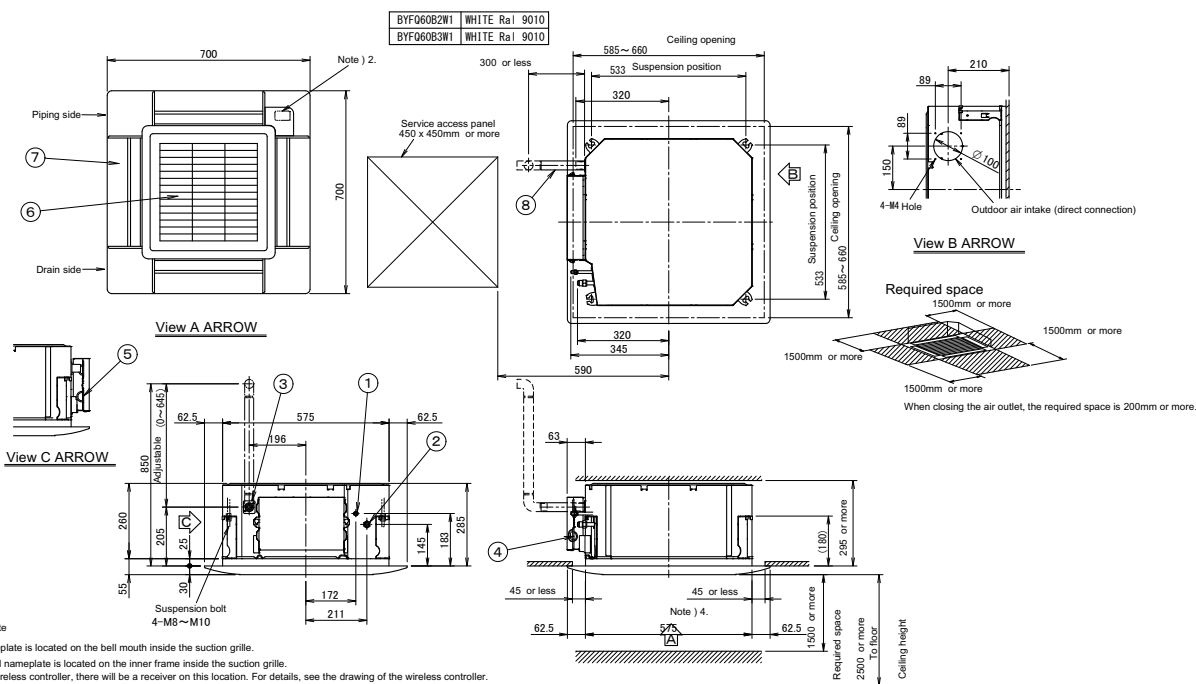

Note)

1. Location of nameplate

The indoor unit nameplate is located on the bell mouth inside the suction grille.
The decoration panel nameplate is located on the inner frame inside the suction grille.
2. When installing a wireless controller, there will be a receiver on this location. For details, see the drawing of the wireless controller.

3. If any of the following conditions are met, additional insulation (glass wool or polyethylene foam, thickness ≥10mm) is required:

Ambient conditions in the ceiling ≥ 30°C and 80% relative humidity.
Fresh air is induced into the ceiling. The unit operates continuously.

4. Though the installation is acceptable up to maximum 660mm square ceiling opening, keep the clearance of 45mm or less between the indoor unit and the ceiling opening, so that the panel overlap allowance can be ensured.


Item	Part name	Remark	Item	Part name	Remark
1	Liquid pipe connection	φ6.4 Flare connection	5	Remote control wiring plate	
2	Gas pipe connection	φ9.5 Flare connection	6	Air discharge grille	
3	Drain pipe connection	VP20 (O.D. φ25)	7	Air suction grille	
4	Power supply		8	Drain hose Accessory I.D. φ25 Outlet	

3D082434C

5 Centre of gravity

5 - 1 Centre of Gravity

FFA-A

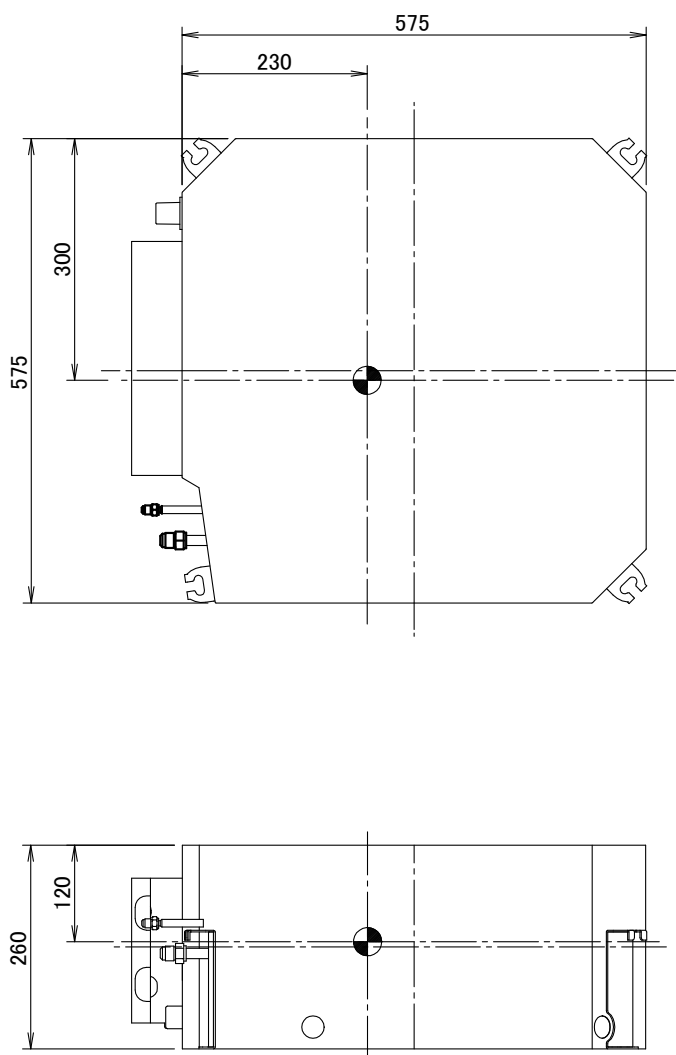

4D082432

6 Piping diagrams


6 - 1 Piping Diagrams

FFA-A

Refrigerant flow

Cooling ———>
 Heating - - - ->

Model	A	B
FFQ25C2VEB	6.35	9.52
FFQ35C2VEB		
FFQ50C2VEB		12.7
FFQ60C2VEB		
FFA25A2VEB		9.52
FFA35A2VEB		
FFA50A2VEB		12.7
FFA60A2VEB		

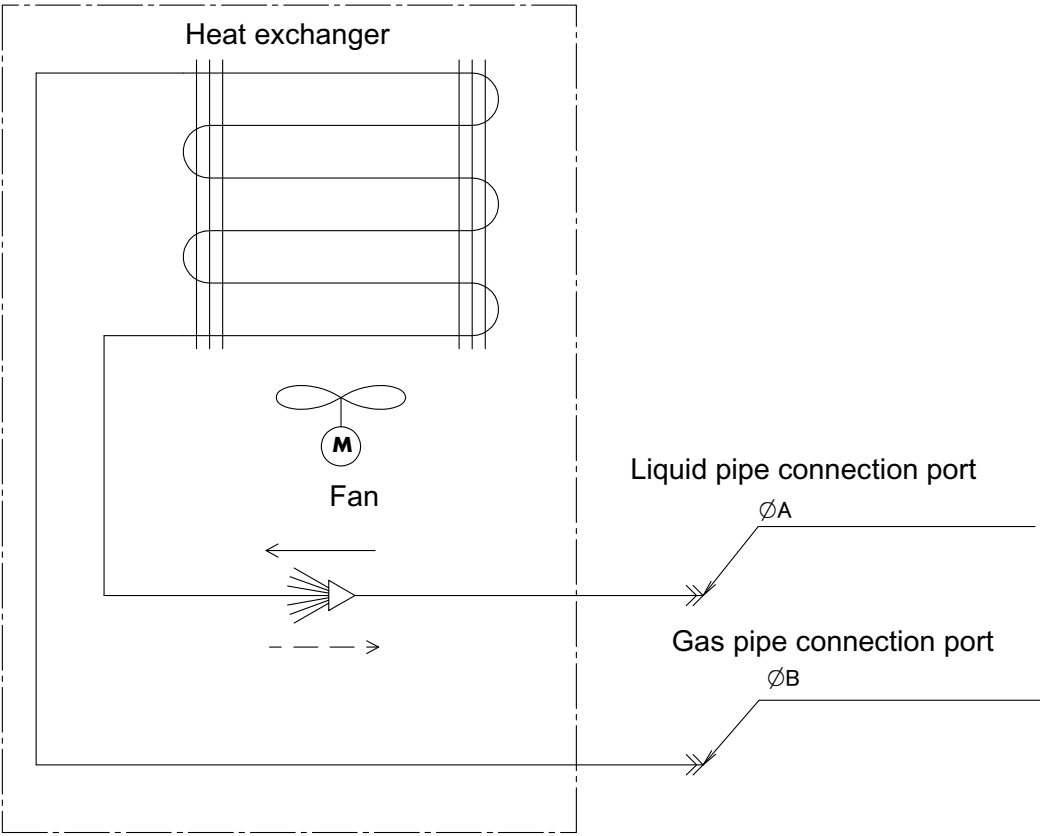

4D082551A

7 - 1 Wiring Diagrams - Single Phase

WIRING DIAGRAM

NOTES:


1. TERMINAL BLOCK FIELD WIRING
2. IN CASE OF SIMULTANEOUS OPERATION INDOOR UNIT SYSTEM. SEE THE INDOOR UNIT WIRING ONLY.
3. FOR THE DETAIL, SEE WIRING DIAGRAM ATTACHED TO OUTDOOR UNIT.
4. IN CASE USING CENTRAL REMOTE CONTROLLER, CONNECT IT TO THE UNIT IN ACCORDANCE WITH THE ATTACHED INSTALLATION MANUAL.
5. IN CASE OF SIMULTANEOUS OPERATION SYSTEM, CONNECTION QUANTITY OF THE INDOOR UNITS VARIES ACCORDING TO THE CONNECTION OUTDOOR UNIT. CONFIRM TECHNICAL GUIDE AND CATALOG, ETC. BEFORE CONNECTING.
6. IN CASE OF MAIN/SUB CHANGE/EVER, SEE THE INSTALLATION MANUAL ATTACHED TO REMOTE CONTROLLER.
7. SYMBOLS SHOW AS FOLLOWS: BLK:BLACK RED:RED BLU:BLUE WHT:WHITE
YLR:YELLOW GRN:GREEN ORG:ORANGE BRN:Brown Pnk:PINK
8. WHEN CONNECTING THE INPUT WIRING FROM OUTSIDE, FORCED OFF OR ON/OFF CONTROL OPERATION CAN BE SELECTED BY THE REMOTE CONTROLLER. SEE INSTALLATION MANUAL FOR MORE DETAIL.

3D109453-1

INDOOR UNIT		H1P	PILOT LAMP (ON-RED)
A1P	PRINTED CIRCUIT BOARD	H2P	PILOT LAMP (TIMER-GREEN)
C105	CAPACITOR	H3P	PILOT LAMP (TIMER-RED)
D101	DI. SWITCH ON PCB	H4P	PILOT LAMP (TIMER-RED)
F10	FUSE (1A 250V)	D51	PILOT LAMP (DEFOST-ORANGE)
H1	FLUSHING LAMP (SERVICE MONITOR GREEN)	D101	SELECTOR SWITCH (MAIN/SUB)
K26	MECHANICAL RELAY	D52	SELECTOR SWITCH (WIRELESS ADDRESS SET)
M1F	FAN MOTOR	SENSOR KIT	
M1P	DRAIN PUMP MOTOR	A4P	PRINTED CIRCUIT BOARD
NE1	NEEDLE VALVE	A5P	PRINTED CIRCUIT BOARD
NE4	NEEDLE VALVE	WIRED REMOTE CONTROLLER	
R1	TERMINATOR (AIR)	R41	TERMINATOR (AIR)
R10	TERMINATOR (COIL)	CONNECTOR FOR OPTIONAL PARTS	
Y1	FLOOD SWITCH	X24A	CONNECTOR (WIRING REMOTE CONTROLLER)
Z10	DIODE BRIDGE	X33A	CONNECTOR (ADAPTOR FOR WIRING)
Z11	TERMINAL BLOCK	X35A	CONNECTOR (POWER SUPPLY FOR ADAPTOR)
Z12	WIRE FILTER	X81A	CONNECTOR (SENSOR KIT)
Z14	FERRITE CORE		
Z15	FERRITE CORE		
PS	SWITCHING POWER SUPPLY		
RC	RECEIVER		
RE	RECEIVER FILTER		
WIRELESS REMOTE CONTROLLER (RECEIVER/DISPLAY UNIT)			
R2P	PRINTED CIRCUIT BOARD		
R20	RESISTOR (10K 1/4W 5% PCB)		

NOTES:

1. DIMENSIONS FOR PRINTING ARE:




3D109453A

8 Sound data

8 - 1 Sound Pressure Spectrum

FFA25A

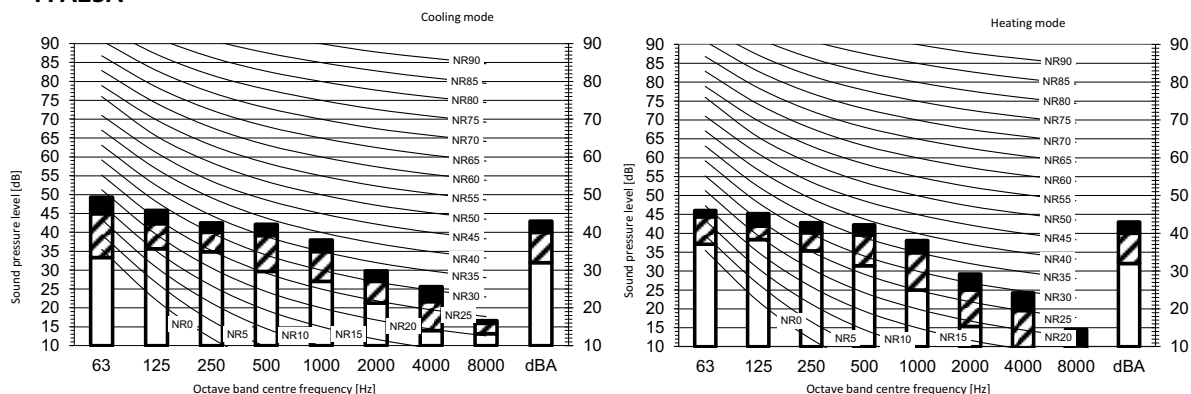


Legend
dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone




Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	31	28,5	25	dBA	31	28,5	25

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D109998

FFA35A

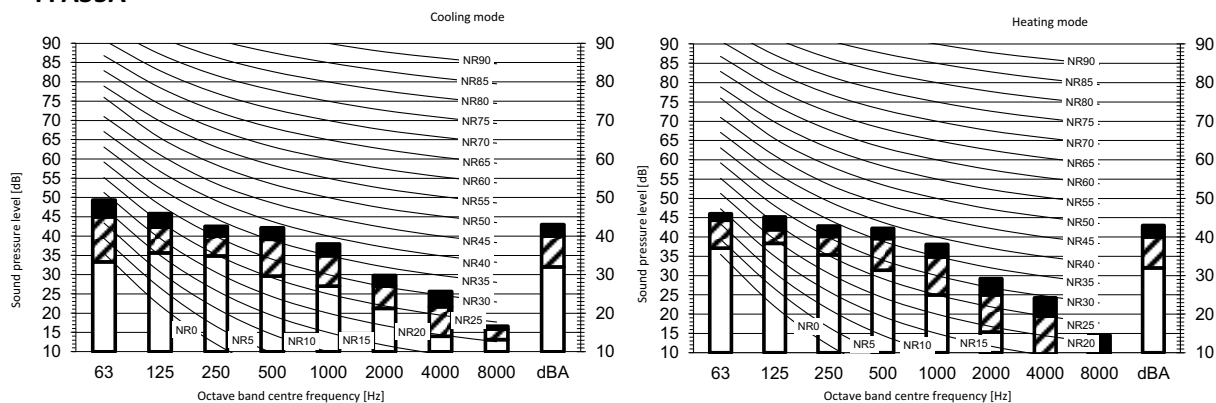


Legend
dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone



Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	34	30,5	25	dBA	34	30,5	25


- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D109999

8 Sound data

8 - 1 Sound Pressure Spectrum

FFA50A

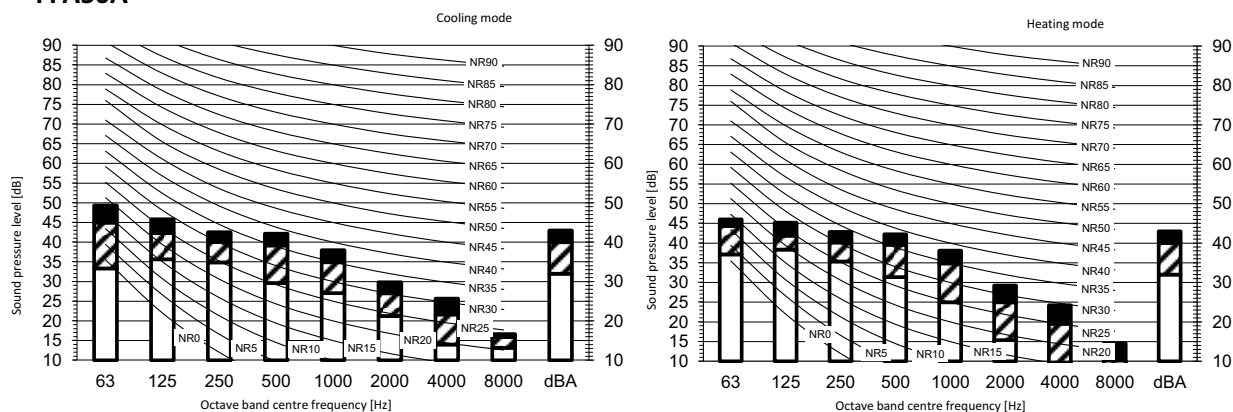


Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	39	34	27	dBA	39	34	27

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D110000

FFA60A

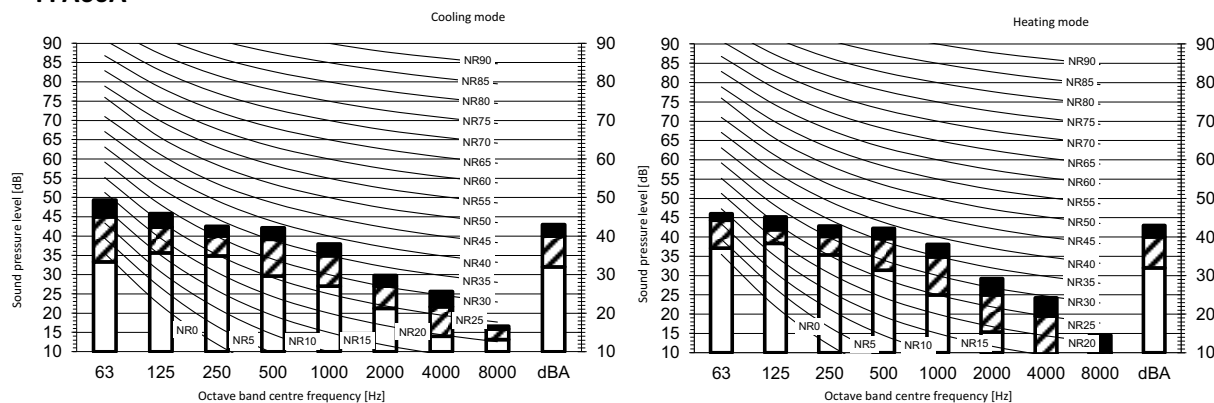

Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	43	40	32	dBA	43	40	32

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D110001

9 Air flow patterns


9 - 1 Air Flow Pattern - Cooling

FFA25A

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

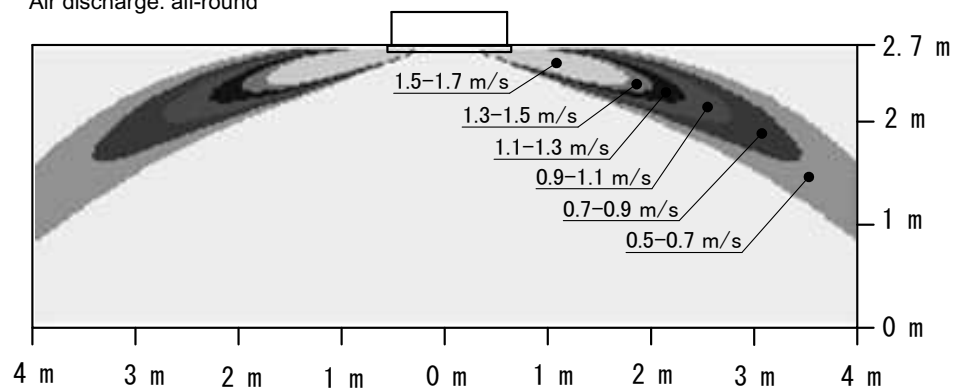

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

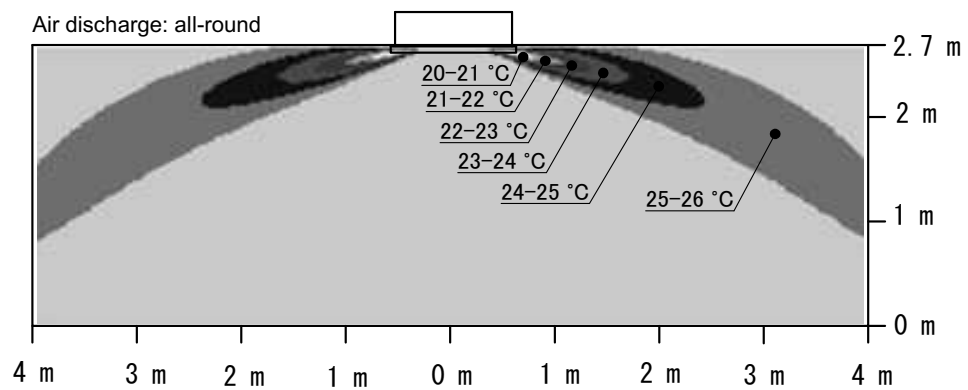

4D083819A

9 Air flow patterns


9 - 1 Air Flow Pattern - Cooling

FFA35A

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

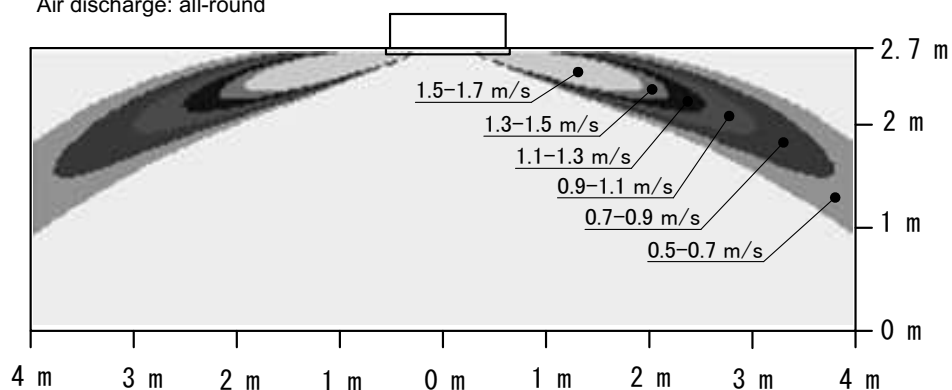

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

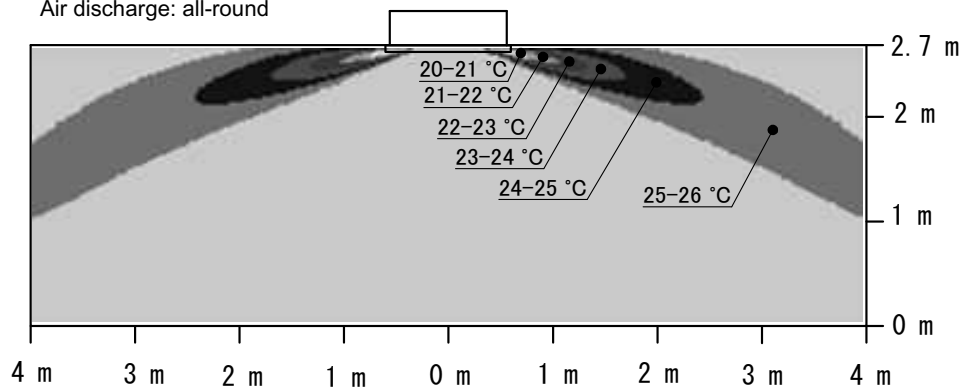

4D083820A

9 Air flow patterns


9 - 1 Air Flow Pattern - Cooling

FFA50A

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

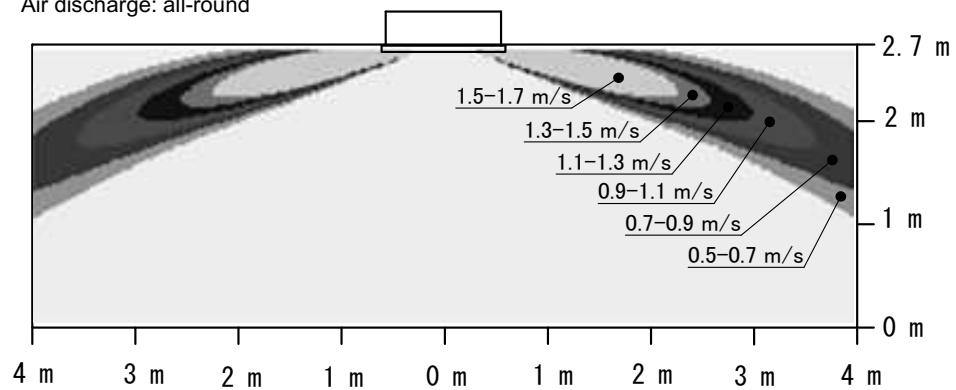

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

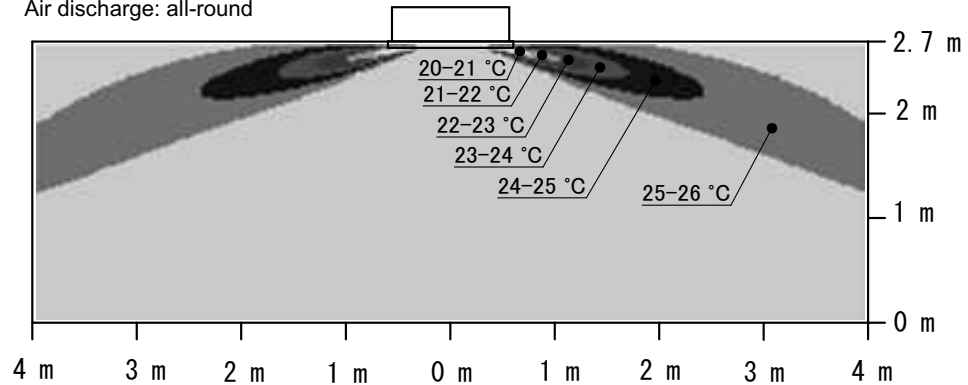

4D083821A

9 Air flow patterns


9 - 1 Air Flow Pattern - Cooling

FFA60A

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

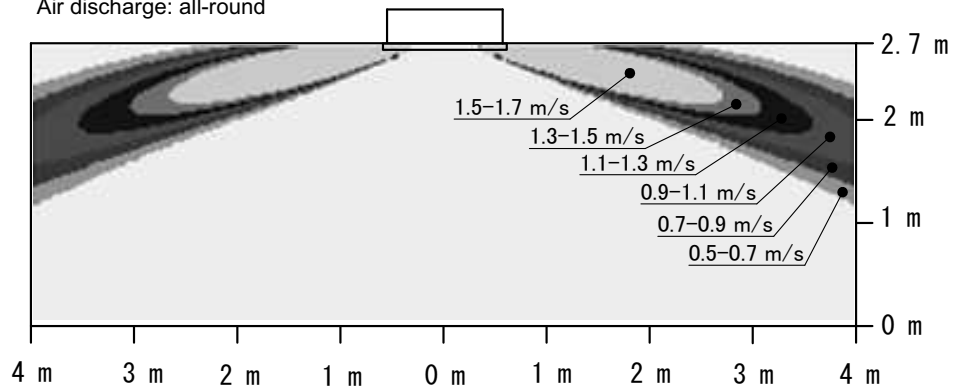

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

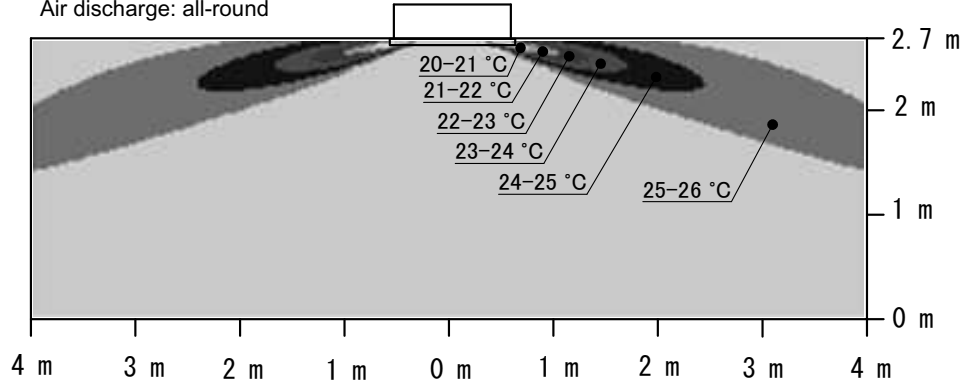

4D083822A


9 Air flow patterns

9 - 2 Air Flow Pattern - Heating

FFA25A


Air velocity distribution (heating)

Air flow direction: horizontal
Air discharge: all-round

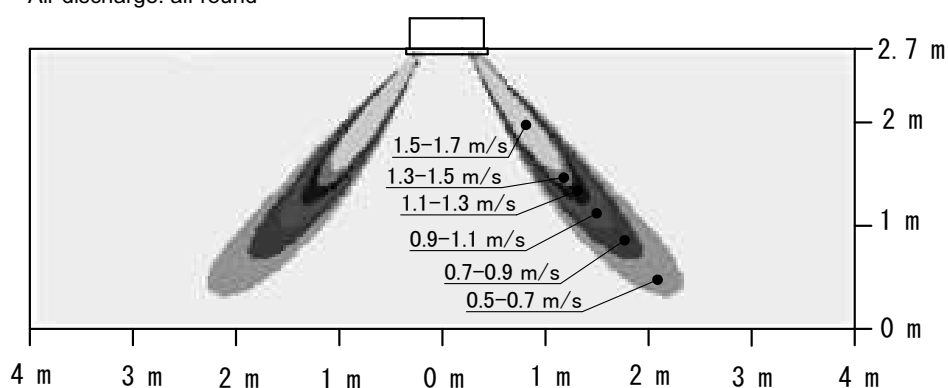

Air temperature distribution (heating)

Air flow direction: horizontal
Air discharge: all-round

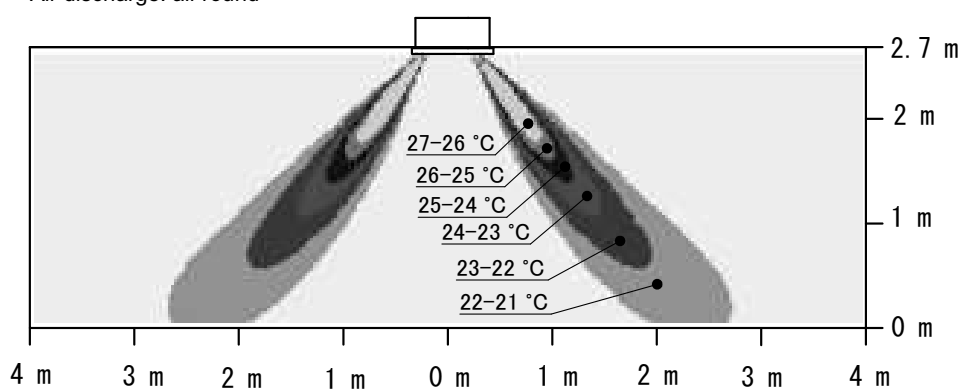

4D083829A

9 Air flow patterns


9 - 2 Air Flow Pattern - Heating

FFA35A

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

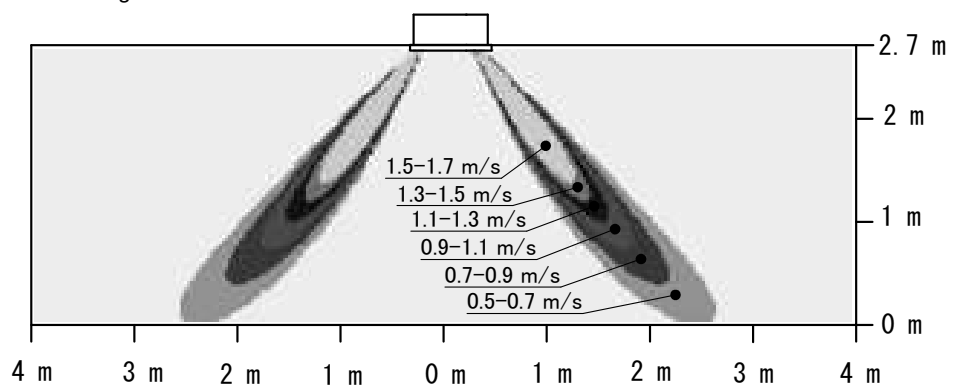

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

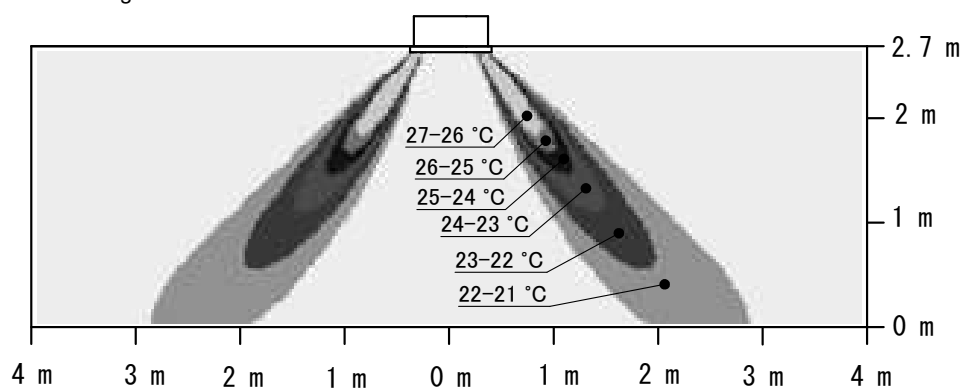

4D083830A

9 Air flow patterns

9 - 2 Air Flow Pattern - Heating


FFA50A

9

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

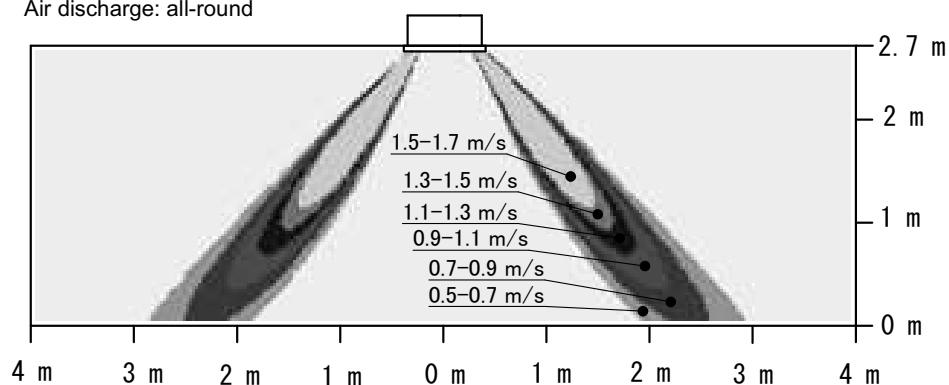

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

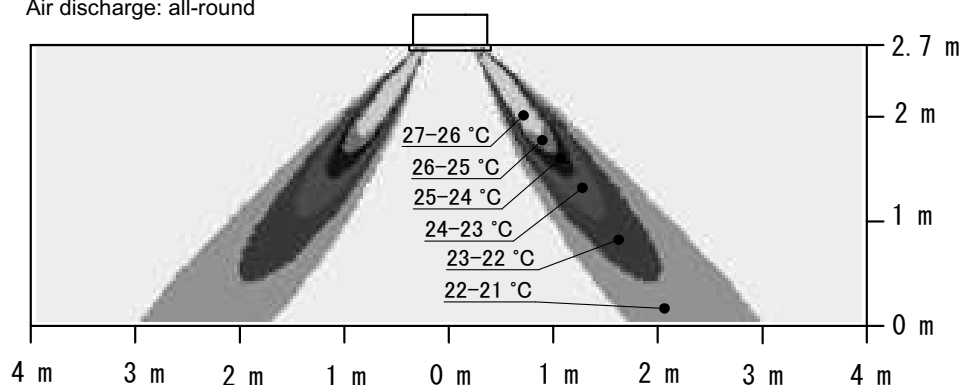

4D083831A

9 Air flow patterns


9 - 2 Air Flow Pattern - Heating

FFA60A

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

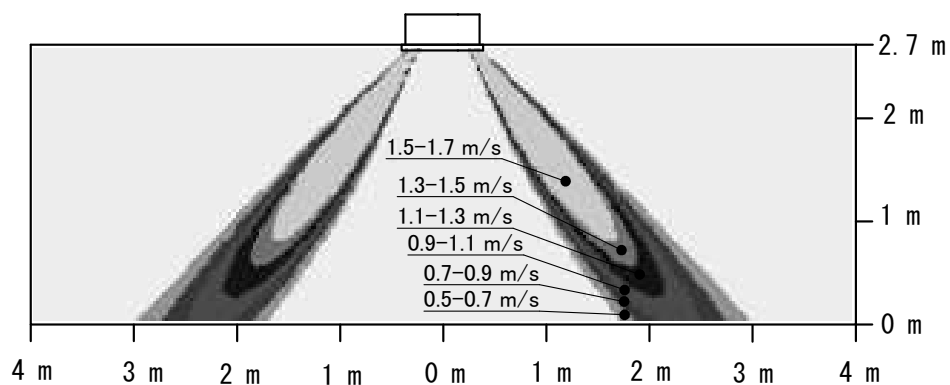

Air temperature distribution (heating)


Air flow direction: horizontal

Air discharge: all-round

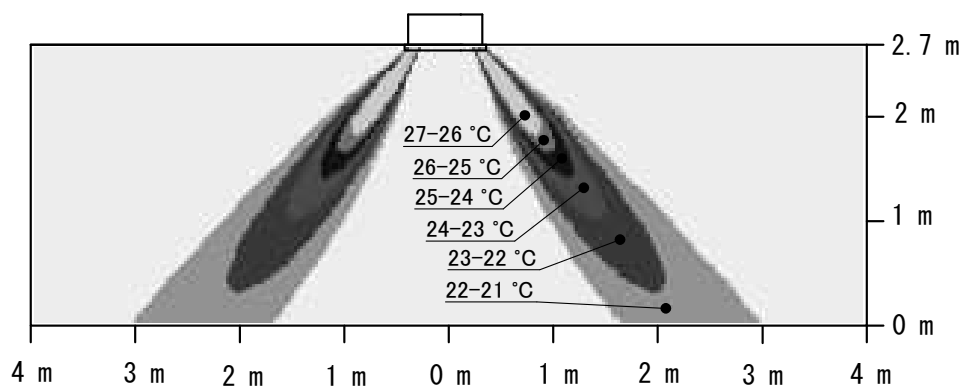

4D083832A

Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende



EEDEN17

05/17



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.