DAIKIN

Sky Air

Air Conditioning Technical Data

FFQ-C



> FFQ25C2VEB
> FFQ35C2VEB
> FFQ50C2VEB
> FFQ60C2VEB

TABLE OF CONTENTS

FFQ-C

1 Features 2

2 Specifications 3
Technical Specifications 3
Electrical Specifications 4

3 Safety device settings 5

4 Options 6

5 Dimensional drawings 7

6 Centre of gravity 8

7 Piping diagrams 9

8 Wiring diagrams 10
Wiring Diagrams - Single Phase 10

9 External connection diagrams 11

10 Sound data 12
Sound Pressure Spectrum 12

11 Air flow patterns 14
Air Flow Pattern - Cooling 14
Air Flow Pattern - Heating 18

1 Features

Unique design in the market that integrates fully flat into the ceiling

- Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Two optional intelligent sensors improve energy efficiency and comfort.
- No optional adapter needed for DIII-connection, link your unit into the wider building management system.
- Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- Optional fresh air intake
- Standard drain pump with 675mm lift increases flexibility and installation speed





Infrastructure cooling



Inverter


Presence & floor sensor


Home leave operation


Fan only



Draught prevention



Auto cooling-heating changeover


Whisper quiet


Ceiling soiling prevention


Individual flap control


Vertical auto swing


Fan speed steps



Dry programme


Air filter



Weekly timer


Infrared remote control


Wired remote control



Auto-restart


Self diagnosis


Drain pump kit


Twin/triple/ double twin application


Multi model application


VRV for residential application

2 Specifications

2-1 Technical Specifications					FFQ25C	FFQ35C	FFQ50C	FFQ60C
Casing	Material				Galvanised steel plate			
Dimensions	Unit	Height/Width/Depth		mm	260/575/575			
	Packed unit	Height/Width/Depth		mm	270/780/616			
Weight	Unit			kg	16		17.5	
	Packed unit			kg	19		20.5	
Decoration panel	Model				BYFQ60CW (white panel)			
	Colour				White (N9.5)			
	Dimensions	HeightxWidthxDepth		mm	46x620x620			
	Weight			kg	2.8			
Decoration panel 2	Model				BYFQ60CS (grey panel)			
	Colour				White (N9.5) + Silver			
	Dimensions	HeightxWidthxDepth		mm	46x620x620			
	Weight			kg	2.8			
Decoration panel 3	Model				BYFQ60B3W1 (standard panel)			
	Colour				White (RAL9010)			
	Dimensions	HeightxWidthxDepth		mm	55x700x700			
	Weight			kg	2.7			
Heat exchanger	Inside length			mm	1,295		1,248	
	Outside length			mm	1,342			
	Rows	Quantity			2		3	
	Fin pitch			mm	1.2			
	Passes	Quantity			5		7	
	Face area			m²	0.290		0.300	
	Stages	Quantity			12		16	
	Empty tubeplate hole	Quantity			0			
	Fin	Type			Cross fin coil (multi slit fins and hi-XA tubes)			
Air filter	Type				Resin net with mold resistance			
Fan	Type				Turbo fan			
	Quantity				1			
	Air flow rate	Cooling	High	m³/min	9	10	12	14.5
			Nom.	m³/min	8	8.5	10	12.5
			Low	m³/min	6.5		7.5	9.5
		Heating	High	m³/min	9	10	12	14.5
			Nom.	m³/min	8	8.5	10	12.5
			Low	m³/min	6.5		7.5	9.5
Fan motor	Model				QTS32D15M			
	Speed	Steps			3			
	Output	High		W	50			
Sound power level	Cooling			dBA	48	51	56	60
	Heating			dBA	-			
Sound pressure level	Cooling	High/Nom./Low		dBA	31/28.5/25	34/30.5/25	39/34/27	43/40/32
	Heating	High/Nom./Low		dBA	31/28.5/25	34/30.5/25	39/34/27	43/40/32
Control systems	Infrared remote control				BRC7F530W (white panel) / BRC7F530S (grey panel) / BRC7EB530W (standard panel)			
	Wired remote control				BRC1D52 / BRC1E52A/B			
Refrigerant	Type				R-410A			
Piping connections	Sound absorbing insulation				Foamed polyurethane			
	Liquid	Type/OD		mm	Flare connection/6.35			
	Gas	Type/OD		mm	Flare connection/9.52		Flare connection/12.7	
	Drain				VP20 (I.D. 20/O.D. 26)			
	Heat insulation				Foamed polystyrene/polyethylene			

2 Specifications

Standard Accessories : Operation manual; Quantity : 1;
Standard Accessories : Installation manual; Quantity : 1;
Standard Accessories : Drain hose; Quantity : 1;
Standard Accessories : Metal clamp for drain hose; Quantity : 1;
Standard Accessories : Washer for hanger bracket; Quantity : 8;
Standard Accessories : Screws; Quantity : 4;
Standard Accessories : Paper pattern for installation; Quantity : 1;
Standard Accessories : Insulation for fitting; Quantity : 2;
Standard Accessories : Sealing pad; Quantity : 4;
Standard Accessories : Clamps; Quantity : 7;

2-2 Electrical Specifications			FFQ25C	FFQ35C	FFQ50C	FFQ60C
Power supply	Name		VE			
	Phase		1~			
	Frequency	Hz	50			
	Voltage	V	220-240			

Notes

Dimensions do not include control box

The sound power level is an absolute value indicating the power which a sound source generates.

3 Safety device settings

3 - 1 Safety Device Settings

FFQ-C

Safety devices		FFQ25-60C2VEB
Fuse		250V 5A
Fan motor thermal fuse	℃	–
Fan motor thermal protector	℃	–
Drain pump fuse	℃	–

Safety devices		FFA25-60A2VEB
Fuse		250V 5A
Fan motor thermal fuse	℃	–
Fan motor thermal protector	℃	–
Drain pump fuse	℃	–

4D082819A

4 Options

4 - 1 Options

FFQ-C

Option kit	Product name	New/Existing	Compatibility			Availability	
			BYFQ60B2W1 BYFQ60B3W1	BYFQ60C2W1W	BYFQ60C2W1S	VRV FXZQ15A2VEB FXZQ20A2VEB FXZQ25A2VEB FXZQ32A2VEB FXZQ40A2VEB FXZQ50A2VEB	SA FFQ25C2VEB FFQ35C2VEB FFQ50C2VEB FFQ60C2VEB
Decoration panel - Standard	BYFQ60B2W1	New	-	-	-	✓	✓
Decoration panel - Standard	BYFQ60B3W1	New	-	-	-	✓	✓
Decoration panel - White	BYFQ60C2W1W	New	-	-	-	✓	✓
Decoration panel - Silver	BYFQ60C2W1S	New	-	-	-	✓	✓
Sensor kit - White	BRYQ60A2W③	New	No	Yes	No	✓	✓
Sensor kit - Silver	BRYQ60A2S③	New	No	No	Yes	✓	✓
Air discharge outlet sealing member	BDBHQ44C60	New	Yes	Yes	Yes	✓	✓
Panel spacer	KDBQ44B60	Existing	Yes	No	No	✓	✓
Long-life replacement filter	KAFQ441BA60	Existing	Yes	Yes	Yes	✓	✓
Fresh air intake kit	KDDQ44XA60	Existing	Yes	Yes	Yes	✓	✓
Remote control | Infrared type | HP	BRC7EB530W①②	New	Yes	No	No	✓	✓
Remote control | Infrared type | HP | White	BRC7F530W①②	New	No	Yes	No	✓	✓
Remote control | Infrared type | HP | Silver	BRC7F530S①②	New	No	No	Yes	✓	✓
Wired remote control	BRC1D528②	Existing	Yes	Yes	Yes	✓	✓
Wired remote control	BRC1E53A7⑧/BRC1E53B7⑨/BRC1E53C7⑩⑪	Existing	Yes	Yes	Yes	✓	✓
Simplified remote control (with operation mode selector button)	BRC2E52C⑤⑪	New	Yes	Yes	Yes	✓	✓
Simplified remote control (without operation mode selector button)	BRC3E52C⑤⑪	New	Yes	Yes	Yes	✓	✓
Central remote control	DCS302BS1	Existing	Yes	Yes	Yes	✓	✓
Unified ON/OFF controller	DCS301BS1	Existing	Yes	Yes	Yes	✓	✓
Schedule timer	DST301BS1	Existing	Yes	Yes	Yes	✓	✓
Wiring adaptor for electrical appendices	KRP1B57	Existing	Yes	Yes	Yes	✓	✓
Wiring adaptor for electrical appendices	KRP2A526	Existing	Yes	Yes	Yes	✓	×
Wiring adaptor for electrical appendices	KRP4A53	Existing	Yes	Yes	Yes	✓	✓
Wiring adaptor (hour meter)	EKRP1B2	Existing	Yes	Yes	Yes	✓	✓
Installation box for adaptor PCB	KRP1B101, KRP1BA101	Existing	Yes	Yes	Yes	✓	✓
Remote sensor	KRCS01-4B	Existing	Yes	Yes	Yes	✓	✓
PCB for multi-tenant indoor units	DTA114A61	Existing	Yes	Yes	Yes	✓	×
iTouch controller	DCS601CS1	Existing	Yes	Yes	Yes	✓	✓
Digital input adaptor	BRP7A53⑥	New	Yes	Yes	Yes	✓	✓

①: The sensing function is not available.
②: The independently-controllable-flaps function is not available.
③: This option cannot be used with RR and RQ models.
④: The independently-controllable-flaps function is not available in combination with RR and RQ models.
⑤: Included languages are:
Language pack 1: English, German, French, Dutch, Spanish, Italian, and Portuguese.
With PC cable EKPCCAB3 in combination with the Updater PC software, you can additionally change the language to:
Language pack 2: English, Bulgarian, Croatian, Czech, Hungarian, Romanian, and Slovenian.
Language pack 3: English, Greek, Polish, Russian, Serbian, Slovak, and Turkish.
⑥: Only possible in combination with remote control BRC2/3E52C, BRC1E53A/B/C7.
⑦: Requires installation box for adaptor PCB
⑧: Included languages are: English, German, French, Italian, Spanish, Portuguese, and Dutch.
⑨: Included languages are: English, Czech, Croatian, Hungarian, Slovenian, Romanian, and Bulgarian.
⑩: Included languages are: English, Russian, Greek, Turkish, Polish, Albanian, and Slovak.
⑪: Language pack 3 of controller BRC1E53C7 is different from that of controller BRC2/3E52C7.
⑫: Editable data for this drawing are available in the GDE (E-BOM) system.

3D102205


5 Dimensional drawings

5 - 1 Dimensional Drawings

FFQ25-35C

・DECORATION PANEL

BYFQ60B2W1	WHITE Ral 9010
BYFQ60B3W1	WHITE Ral 9010

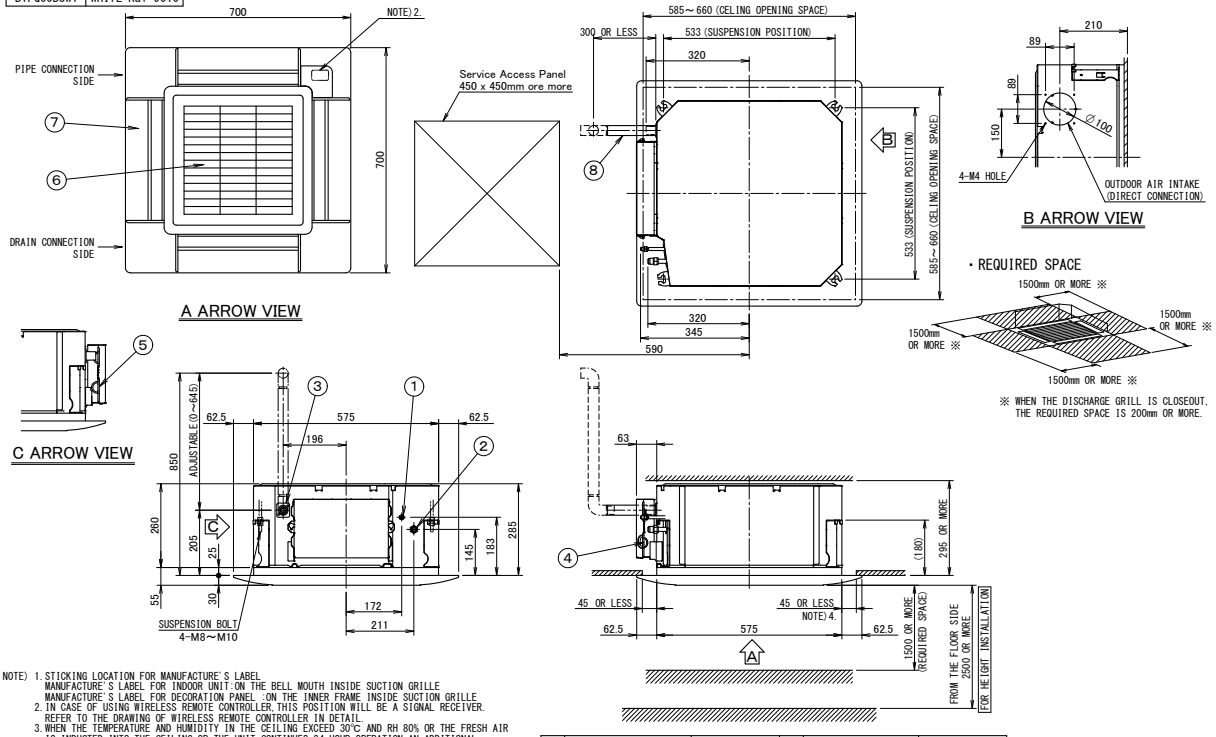

NOTE) 1. STICKING LOCATION FOR MANUFACTURE'S LABEL
MANUFACTURE'S LABEL FOR INDOOR UNIT:ON THE BELL MOUTH INSIDE SUCTION GRILLE
MANUFACTURE'S LABEL FOR DECORATION PANEL :ON THE INNER FRAME INSIDE SUCTION GRILLE
2. IN CASE OF USING WIRELESS REMOTE CONTROLLER, THIS POSITION WILL BE A SIGNAL RECEIVER. REFER TO THE DRAWING OF WIRELESS REMOTE CONTROLLER IN DETAIL.
3. WHEN THE TEMPERATURE AND HUMIDITY IN THE CEILING EXCEED 30°C AND RH 80% OR THE FRESH AIR IS INDUCTED INTO THE CEILING OR THE UNIT CONTINUES 24 HOUR OPERATION, AN ADDITIONAL INSULATION (THICKNESS 10mm OR MORE OF GLASSWOOL OR POLYETHYLENE FORM) IS REQUIRED.
4. THOUGH THE INSTALLATION IS ACCEPTABLE UP TO MAXIMUM OF 660mm SQUARE CEILING OPENING, KEEP THE CLEARANCE OF 45mm OR LESS BETWEEN THE MAIN UNIT AND THE CEILING OPENING SO THAT THE PANEL OVERLAP ALLOWANCE CAN BE ENSURED.


ITEM	PART NAME	REMARK	ITEM	PART NAME	REMARK
1	LIQUID PIPE CONNECTION	φ6.4 (FRARE CONNECTION)	5	REMOTE CONTROL CODE AND CONTROL WIRING CONNECTION	
2	GAS PIPE CONNECTION	φ9.5 (FRARE CONNECTION)	6	AIR DISCHARGE GRILL	
3	DRAIN PIPE CONNECTION	VP20 (O.D. φ26)	7	SUCTION GRILL	
4	POWER SUPPLY CONNECTION		8	DRAIN HOSE (ACCESSORY)	I.D. φ25 (OUTLET)

3D082434B

FFQ50-60C

・DECORATION PANEL

BYFQ60B2W1	WHITE Ral 9010
BYFQ60B3W1	WHITE Ral 9010

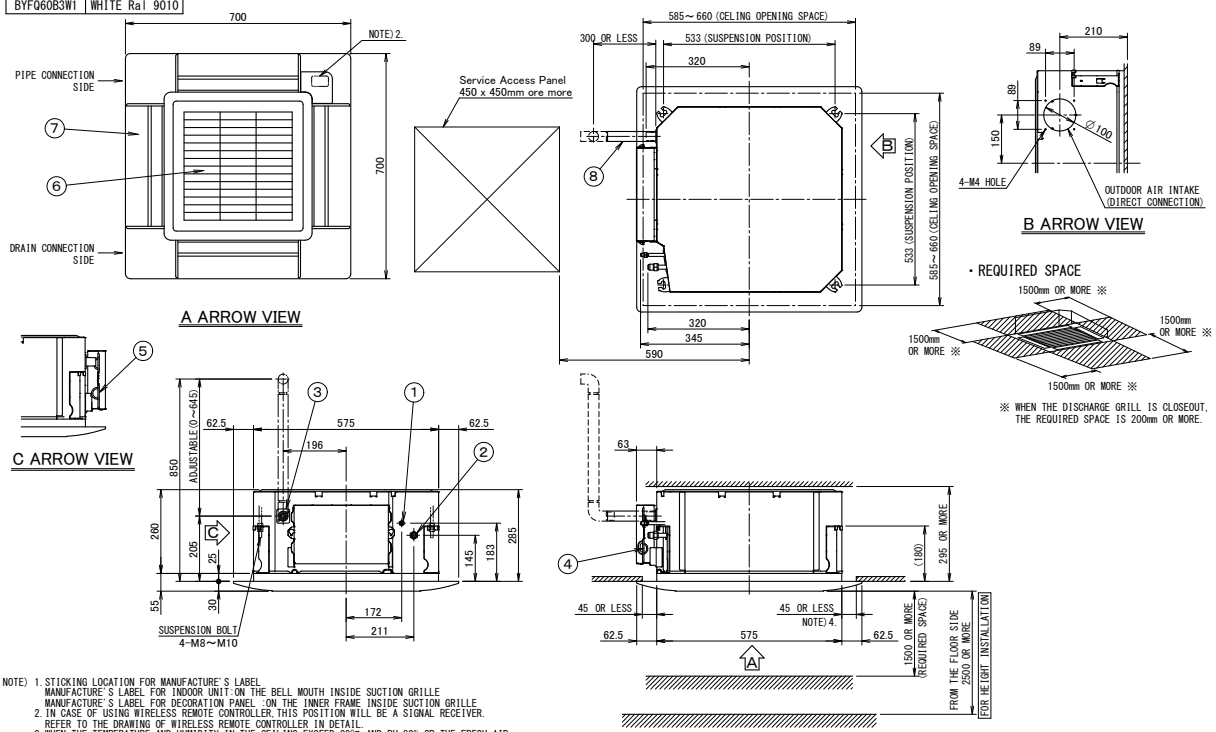

NOTE) 1. STICKING LOCATION FOR MANUFACTURE'S LABEL
MANUFACTURE'S LABEL FOR INDOOR UNIT:ON THE BELL MOUTH INSIDE SUCTION GRILLE
MANUFACTURE'S LABEL FOR DECORATION PANEL :ON THE INNER FRAME INSIDE SUCTION GRILLE
2. IN CASE OF USING WIRELESS REMOTE CONTROLLER, THIS POSITION WILL BE A SIGNAL RECEIVER. REFER TO THE DRAWING OF WIRELESS REMOTE CONTROLLER IN DETAIL.
3. WHEN THE TEMPERATURE AND HUMIDITY IN THE CEILING EXCEED 30°C AND RH 80% OR THE FRESH AIR IS INDUCTED INTO THE CEILING OR THE UNIT CONTINUES 24 HOUR OPERATION, AN ADDITIONAL INSULATION (THICKNESS 10mm OR MORE OF GLASSWOOL OR POLYETHYLENE FORM) IS REQUIRED.
4. THOUGH THE INSTALLATION IS ACCEPTABLE UP TO MAXIMUM OF 660mm SQUARE CEILING OPENING, KEEP THE CLEARANCE OF 45mm OR LESS BETWEEN THE MAIN UNIT AND THE CEILING OPENING SO THAT THE PANEL OVERLAP ALLOWANCE CAN BE ENSURED.


ITEM	PART NAME	REMARK	ITEM	PART NAME	REMARK
1	LIQUID PIPE CONNECTION	φ6.4 (FRARE CONNECTION)	5	REMOTE CONTROL CODE AND CONTROL WIRING CONNECTION	
2	GAS PIPE CONNECTION	φ12.7 (FRARE CONNECTION)	6	AIR DISCHARGE GRILL	
3	DRAIN PIPE CONNECTION	VP20 (O.D. φ26)	7	SUCTION GRILL	
4	POWER SUPPLY CONNECTION		8	DRAIN HOSE (ACCESSORY)	I.D. φ25 (OUTLET)

3D082161B

6 Centre of gravity

6 - 1 Centre of Gravity

FFQ-C

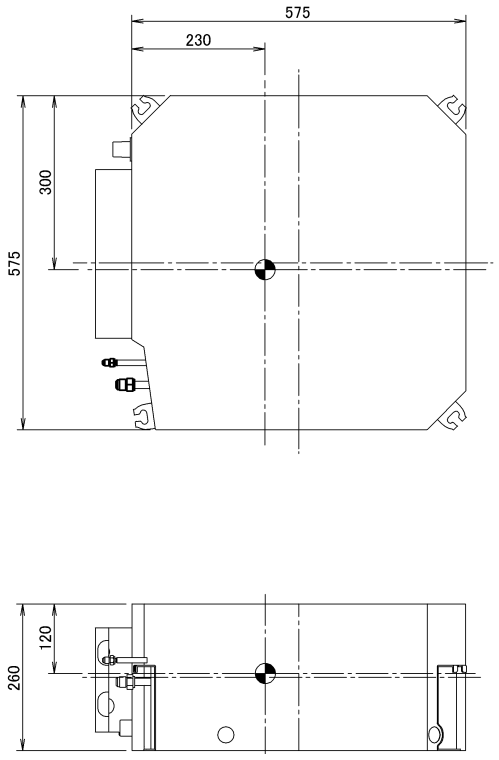

4D082432

7 Piping diagrams

7 - 1 Piping Diagrams


FFQ-C

Model	A	B
FFQ25C2VEB	6.35	9.52
FFQ35C2VEB		
FFQ50C2VEB		12.7
FFQ60C2VEB		
FFA25A2VEB		9.52
FFA35A2VEB		
FFA50A2VEB		12.7
FFA60A2VEB		

Refrigerant flow

Cooling ——→

Heating – — →

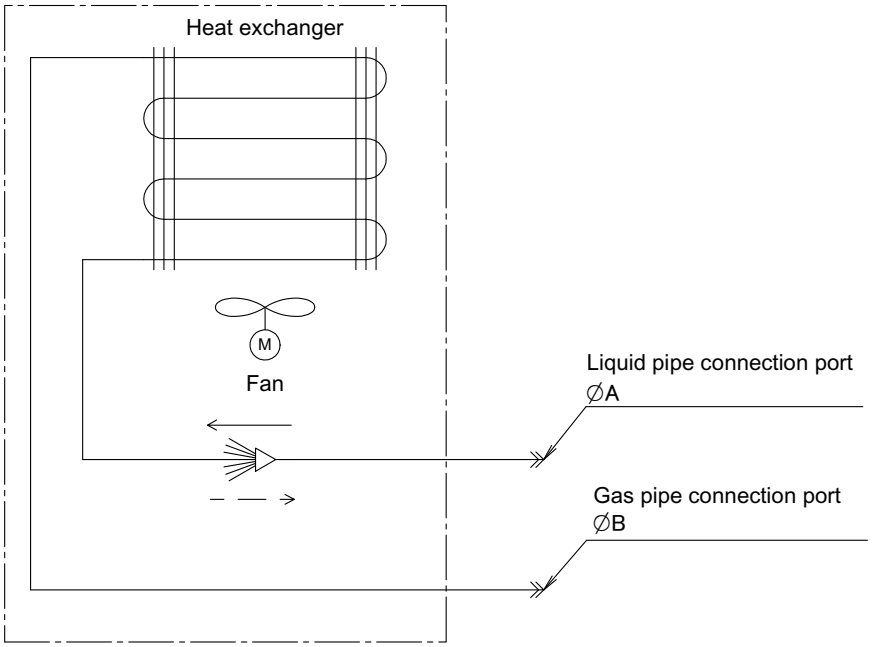


4D082551A

8 Wiring diagrams

8 - 1 Wiring Diagrams - Single Phase

FFQ-C

Indoor unit	
A1P	Printed circuit board
C105	Capacitor (M1F)
DS1	Dip switch on PCB
F1U	Fuse (F, 5A, 250V)
HAP	Flashing lamp (service monitor-green)
K2R	Magnetic relay
M1F	Fan motor
M1P	Drain pump motor
M1S • M2S M3S • M4S	Swing motor
R1T	Thermistor (air)
R2T • R3T	Thermistor (coil)
S1L	Float switch
V1R	Diode bridge
X1M	Terminal block
X2M	Terminal block
Z1F	Noise filter
Z1C	Ferrite core
Z2C	Ferrite core
PS	Switching power supply
RC	Receiver
TC	Transmitter
Infrared remote controller (Receiver/display unit)	
A2P	Printed circuit board
A3P	Printed circuit board
BS1	Push button switch on PCB
H1P	Pilot lamp (on-red)
H2P	Pilot lamp (timer-green)
H3P	Pilot lamp (filter sign-red)
H4P	Pilot lamp (defrost-orange)
SS1	Selector switch (main/sub)
SS2	Selector switch (infrared address set)
Sensor kit	
A4P	Printed circuit board
A5P	Printed circuit board
Wired remote controller	
R4T	Thermistor (air)
Connector for optional parts	
X24A	Connector (Infrared remote controller)
X33A	Connector (adapter for wiring)
X35A	Connector (Power supply for adapter)
X81A	Connector (Sensor kit)

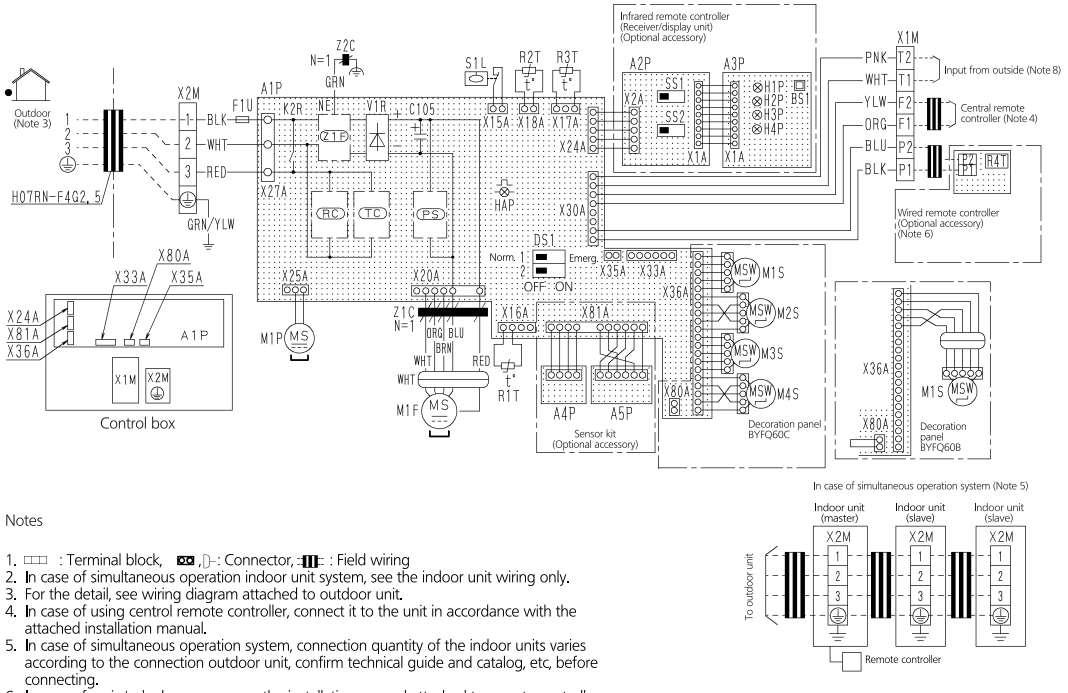

Notes


1. □□□ : Terminal block, ⊠, ⊃: Connector, ▯▯▯ : Field wiring
2. In case of simultaneous operation indoor unit system, see the indoor unit wiring only.
3. For the detail, see wiring diagram attached to outdoor unit.
4. In case of using central remote controller, connect it to the unit in accordance with the attached installation manual.
5. In case of simultaneous operation system, connection quantity of the indoor units varies according to the connection outdoor unit, confirm technical guide and catalog, etc, before connecting.
6. In case of main/sub changeover, see the installation manual attached to remote controller.
7. Symbols show as follows: BLK:Black RED:Red BLU:Blue WHT:White YLW:Yellow GRN:Green ORG:Orange BRN:Brown PNK:Pink.
8. When connecting the input wiresing from outside, forced off or on/off control operation can be selected by the remote controller See installation manual for more details.

3D081395B

9 External connection diagrams

9 - 1 External Connection Diagrams

FFQ-C

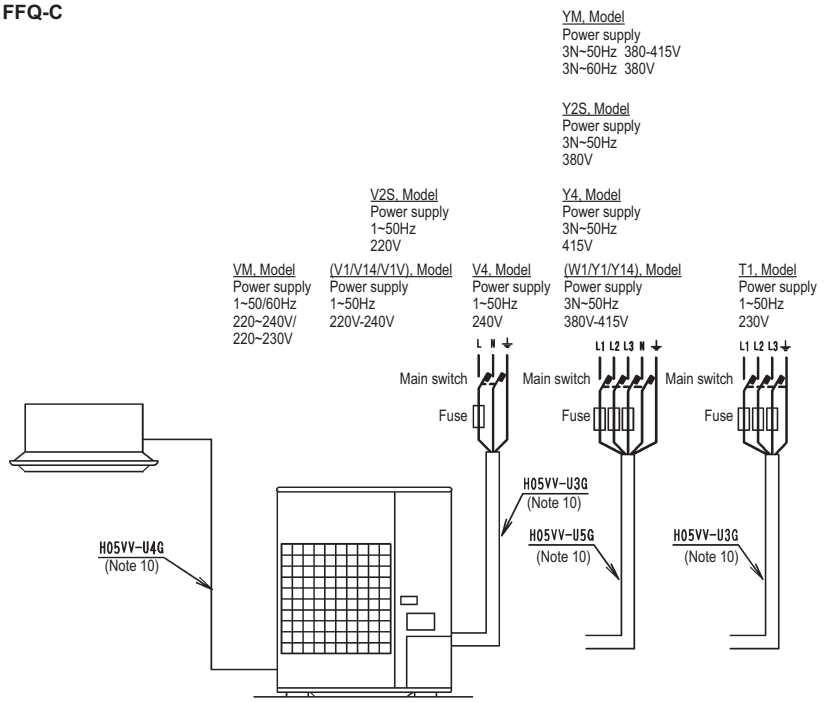

4D010992L


NOTES

1. _____ Line voltage wiring
   _____ Control circuit wiring
2. All wiring, components and materials to be procured on the site must comply with the applicable local and national codes.
3. Use copper conductor only.
4. As for details, see wiring diagrams.
5. Install fuse and mains witch for safety.
6. All field wiring and components must be provided by a licensed electrician.
7. Unit shall be grounded in compliance with the applicable local and national codes.
8. Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
9. Never share a common power source with other equipment.
10. Shows only in case of protected pipes.
    Use H07RN-F in case of no protection.

10 Sound data

10 - 1 Sound Pressure Spectrum

FFQ25C

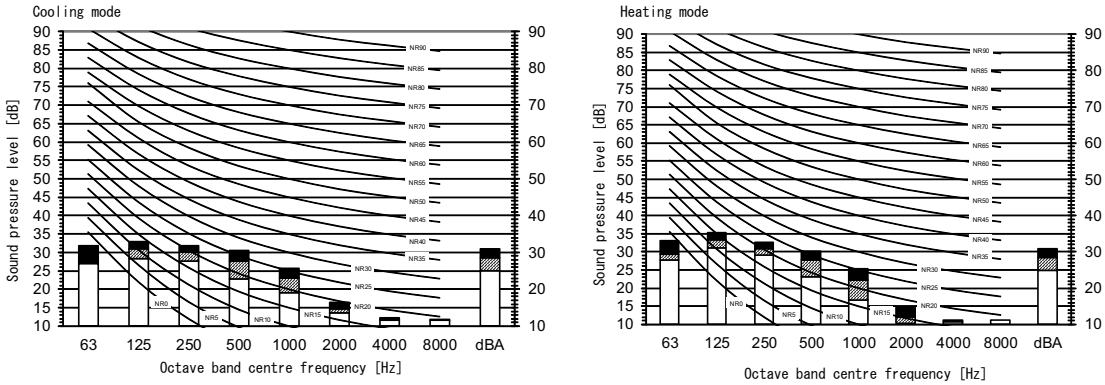

Legend

dBA = A-weighted sound pressure level (A scale according to IEC)

A	Scale	
B	High	
C	Medium	
D	Low	


Cooling Total dBA

A	B	C	D
dBA	31	28.5	25

Heating Total dBA

A	B	C	D
dBA	31	28.5	25

Location of microphone




Notes

1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level (A scale according to IEC).
4. Editable data for this drawing are available in the ·GDE (E-BOM)· system.
5. Sound power [dBA]

High	48 dBA

3D082562A

FFQ35C

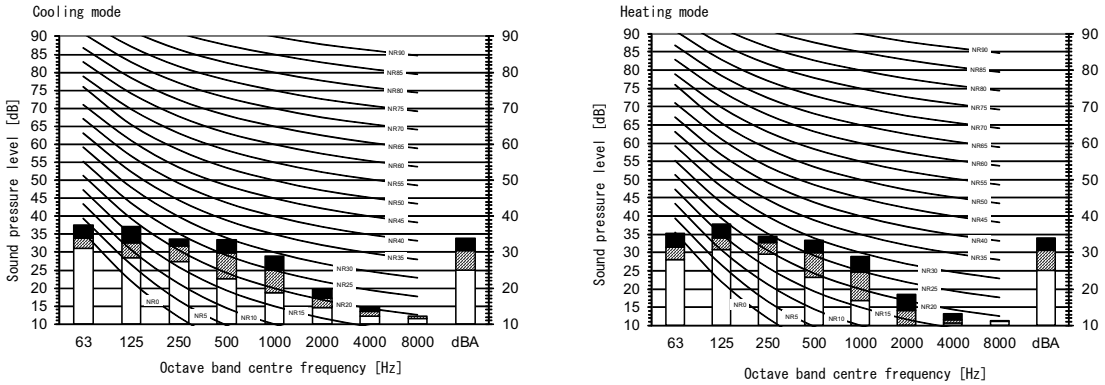

Legend

dBA = A-weighted sound pressure level (A scale according to IEC)

A	Scale	
B	High	
C	Medium	
D	Low	


Cooling Total dBA

A	B	C	D
dBA	34	30.5	25

Heating Total dBA

A	B	C	D
dBA	34	30.5	25

Location of microphone



Notes

1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level (A scale according to IEC).
4. Editable data for this drawing are available in the ·GDE (E-BOM)· system.
5. Sound power [dBA]

High	51 dBA


3D082563A

10 Sound data


10 - 1 Sound Pressure Spectrum

FFQ50C

Cooling mode

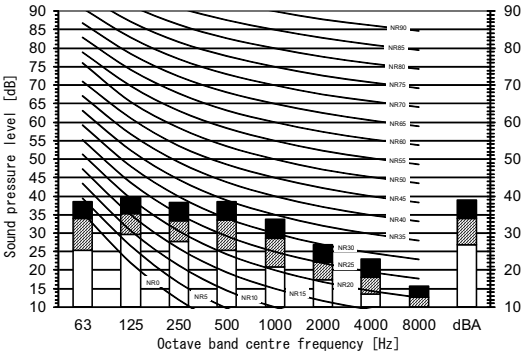

Heating mode

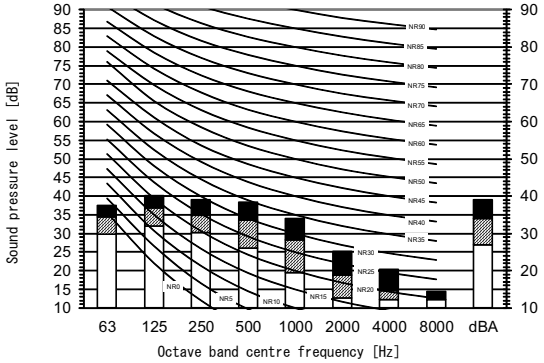

Legend

dBA = A-weighted sound pressure level (A scale according to IEC)

A	Scale	
B	High	
C	Medium	
D	Low	


Cooling Total dBA

A	B	C	D
dBA	39	34	27

Heating Total dBA

A	B	C	D
dBA	39	34	27

Location of microphone



Notes


1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level (A scale according to IEC).
4. Editable data for this drawing are available in the ·GDE (E-BOM)· system.
5. Sound power [dBA]

High	56 dBA


3D082564A

FFQ60C

Cooling mode

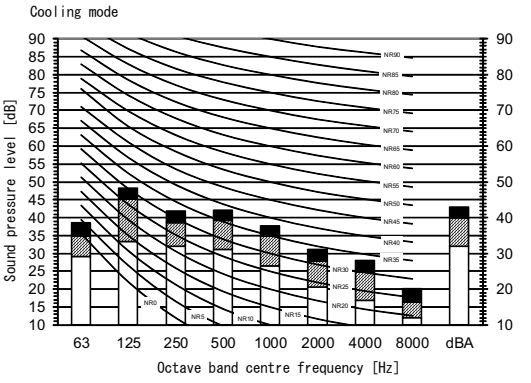

Heating mode

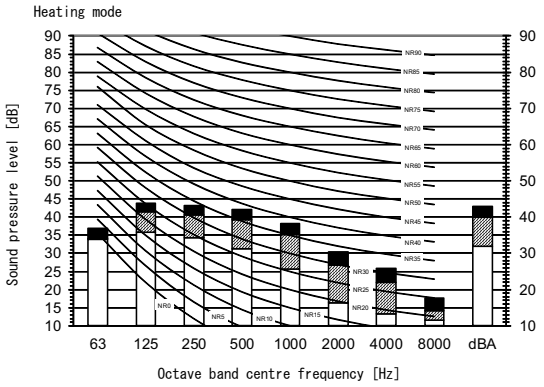

Legend

dBA = A-weighted sound pressure level (A scale according to IEC)

A	Scale	
B	High	
C	Medium	
D	Low	


Cooling Total dBA

A	B	C	D
dBA	43	40	32

Heating Total dBA

A	B	C	D
dBA	43	40	32

Location of microphone



Notes

1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level (A scale according to IEC).
4. Editable data for this drawing are available in the ·GDE (E-BOM)· system.
5. Sound power [dBA]

High	60 dBA

3D082565A

11 Air flow patterns


11 - 1 Air Flow Pattern - Cooling

FFQ25C

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

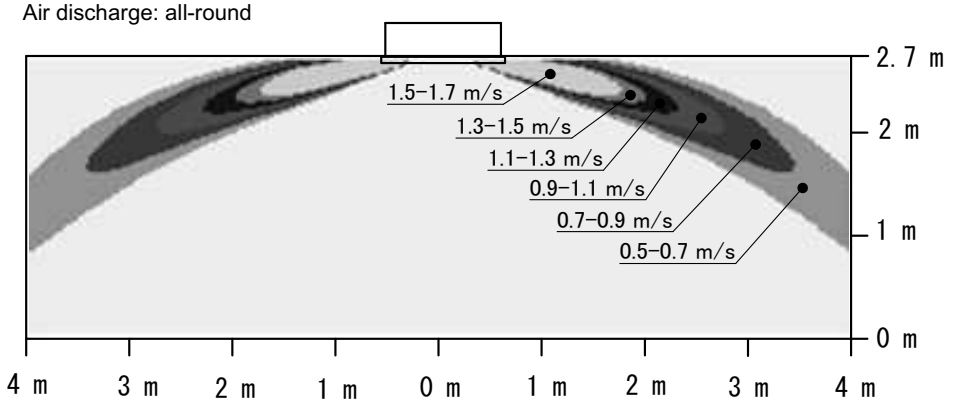

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

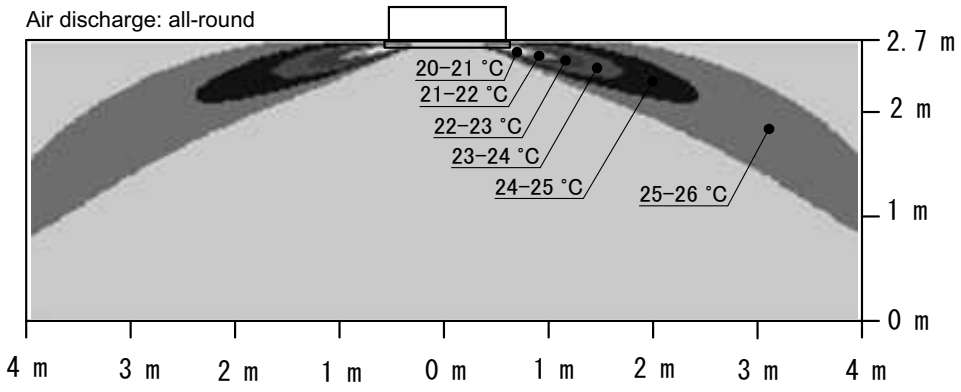

4D083819A

11 Air flow patterns


11 - 1 Air Flow Pattern - Cooling

FFQ35C

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

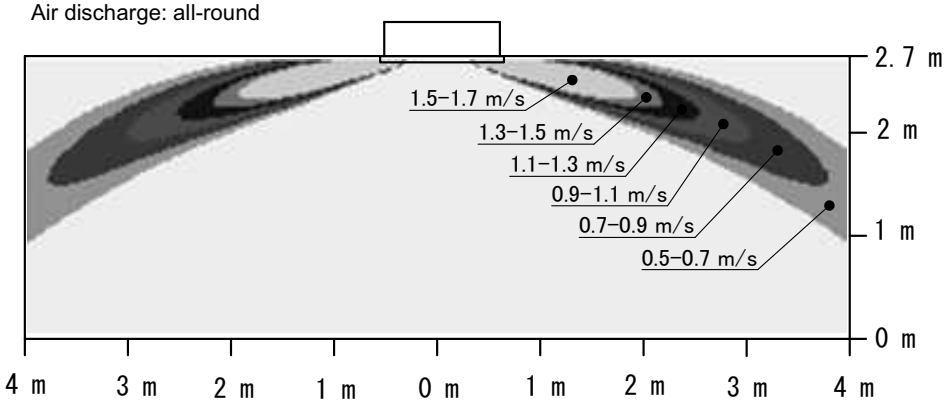

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

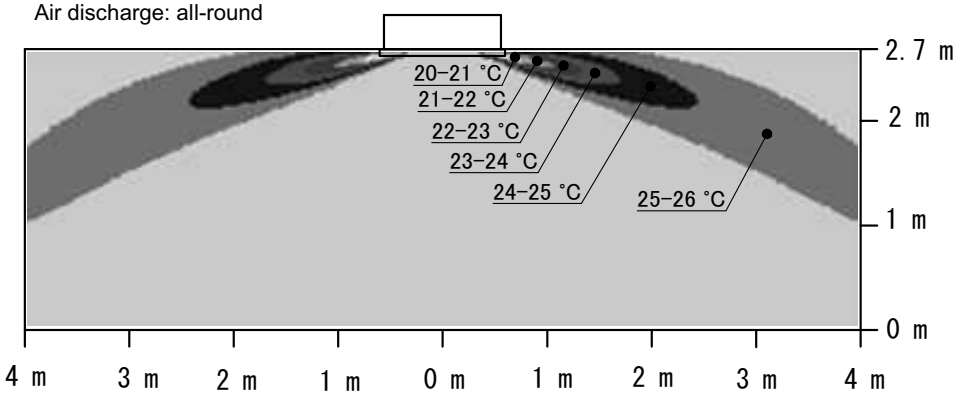

4D083820A

11 Air flow patterns

11 - 1 Air Flow Pattern - Cooling


FFQ50C

11

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

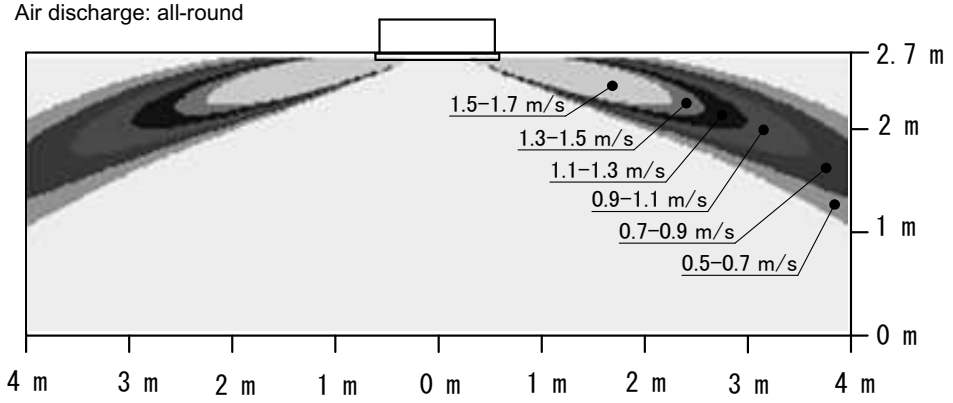

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

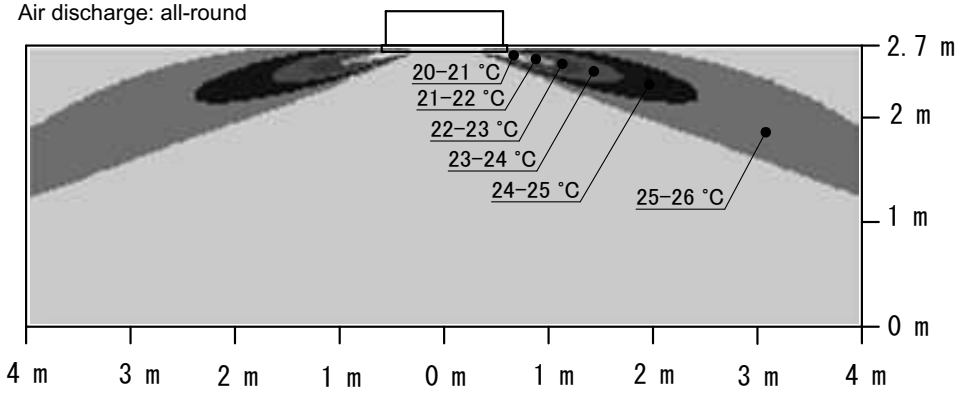

4D083821A

11 Air flow patterns


11 - 1 Air Flow Pattern - Cooling

FFQ60C

Air velocity distribution (cooling)

Air flow direction: horizontal


Air discharge: all-round

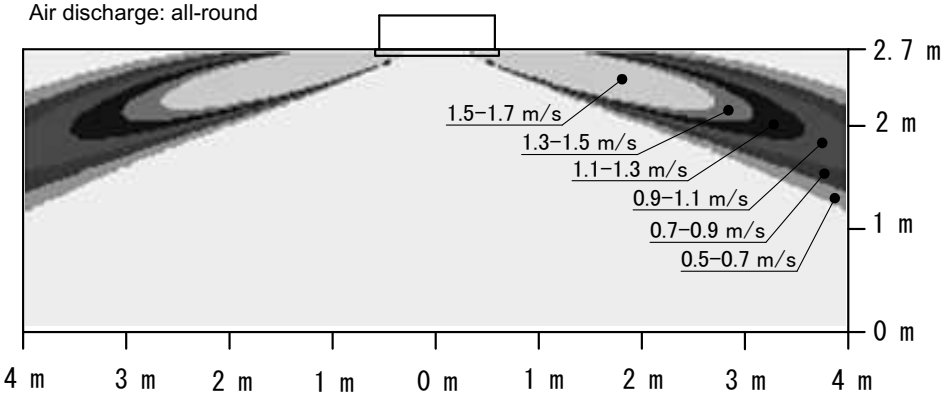

Air temperature distribution (cooling)

Air flow direction: horizontal

Air discharge: all-round

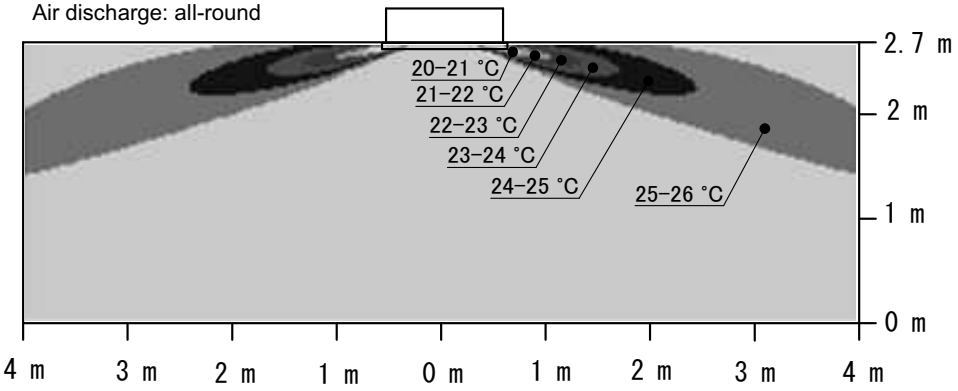

4D083822A

11 Air flow patterns


11 - 2 Air Flow Pattern - Heating

FFQ25C

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

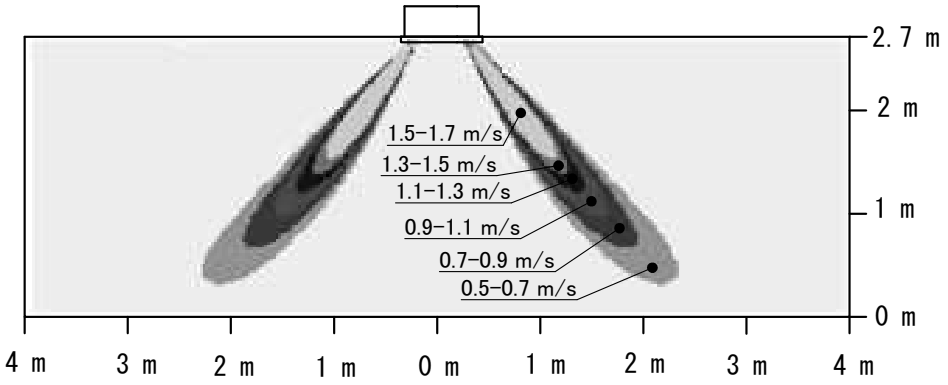

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

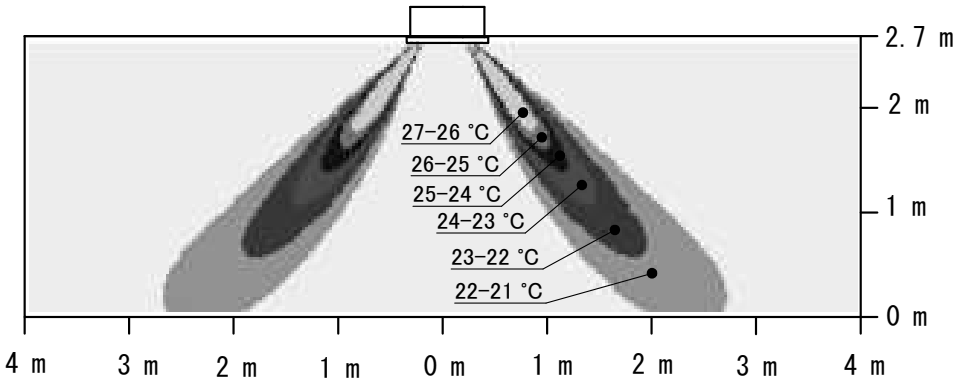

4D083829A

11 Air flow patterns


11 - 2 Air Flow Pattern - Heating

FFQ35C

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

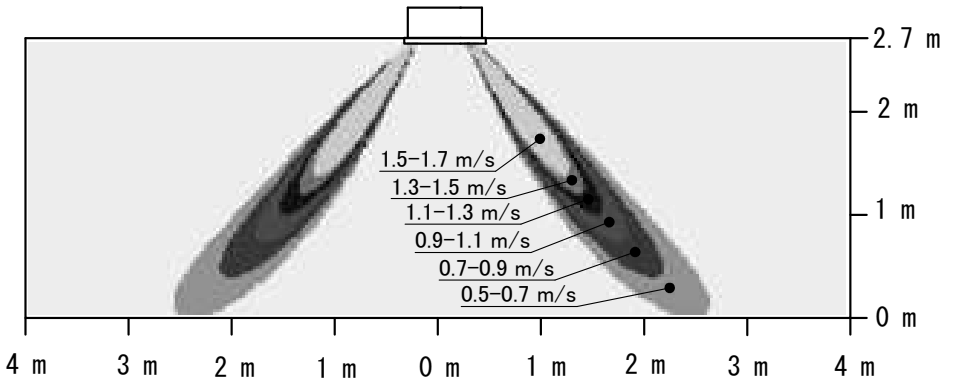

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

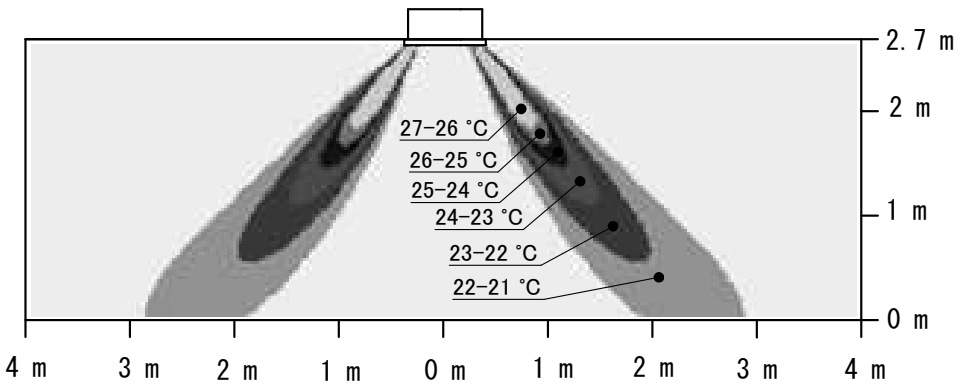

4D083830A

11 Air flow patterns


11 - 2 Air Flow Pattern - Heating

FFQ50C

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

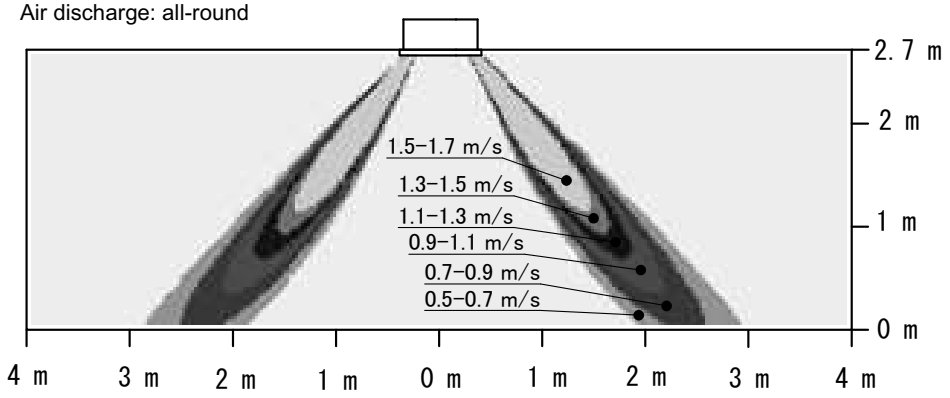

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

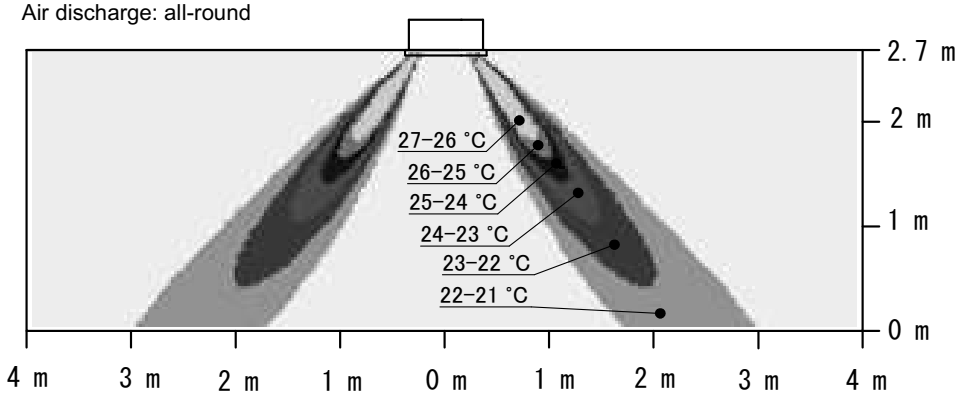

4D083831A

11 Air flow patterns


11 - 2 Air Flow Pattern - Heating

FFQ60C

Air velocity distribution (heating)

Air flow direction: horizontal


Air discharge: all-round

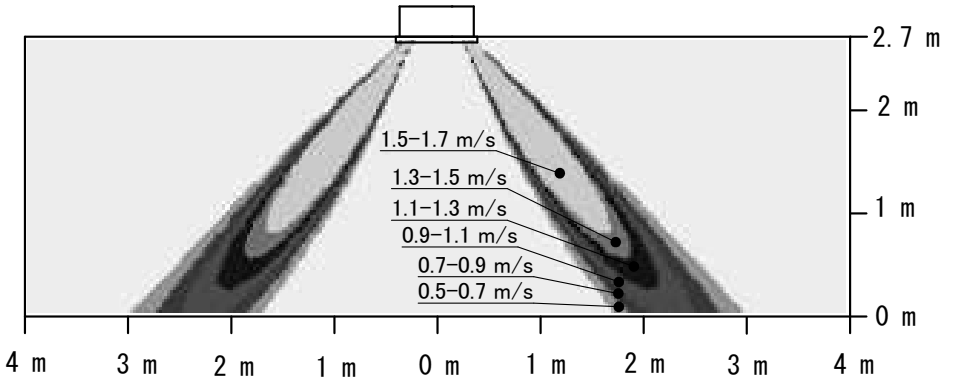

Air temperature distribution (heating)

Air flow direction: horizontal

Air discharge: all-round

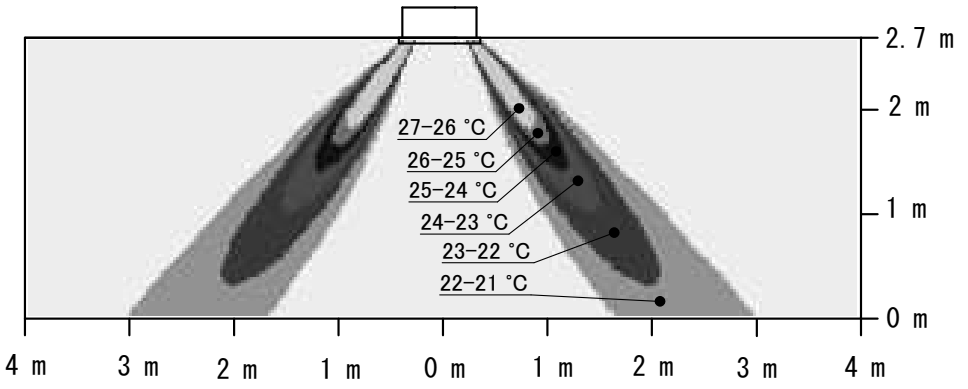

4D083832A

Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende

MIX
Paper from responsible sources
FSC® C109049

EEDEN17 10/16

ISO 9001 · ISO 14001

Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.