
1.23. KRP1B57 – Wiring adapter for electrical appendices

Accessories Check if the following accessories are included in the kit.

Adaptor

x 1




PC board support	x 4
Tie wrap	x 3
Installation manual	x 1

NOTE

- Kits vary according to applicable models.
- A special adapter fixing plate and box are required for the following models.
  FH(Y)C..... KRP1B94
  FVY..... KRP1B95


1 NAMES OF PARTS

Display output terminals

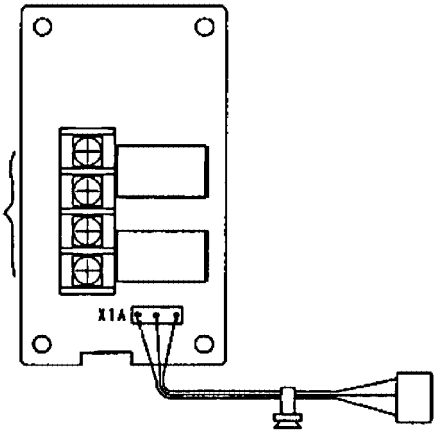

2 ELECTRICAL WIRING


- Refer to the WIRING DIAGRAM attached to the indoor unit before attempting to wire.
  [Make sure wires to units do not pass over the PC board when wiring.]
- Wire the adaptor to the indoor unit as described below.

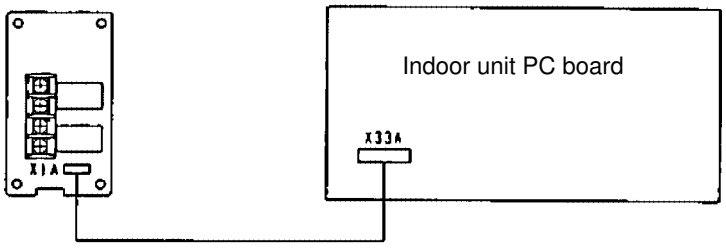

① Fetching the operation display signal


• Attaching an hour meter

Output is generated at the contact while the compressor is running.

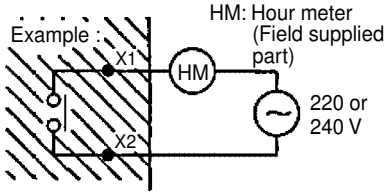

• Fan ON display

Output is generated at the contact while the fan is running.

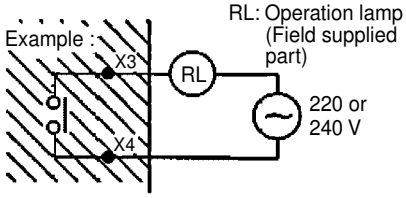


3 INSTALLATION

- Installation differs according to models as shown below.
- Do not bundle low and high voltage wires together.
- Bundle any excess wire with the attached tie wraps so as to keep loose wirings off the indoor unit PC board.

〈 Ceiling mounted cassette type 〉

FH(Y)C (Multiflow type)

Fit the edge of the adapter PCB into the grooves on the adapter box.

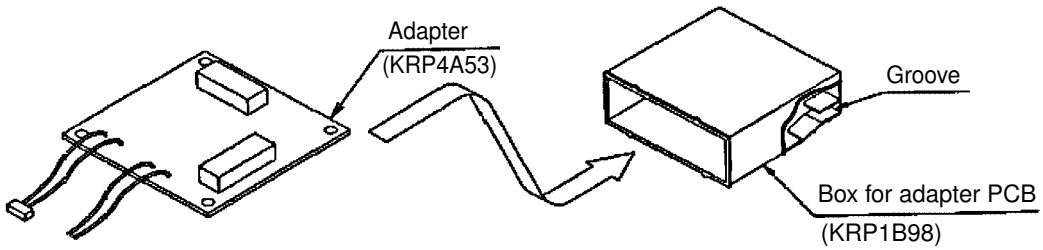

NOTE: Optional adapter box is required to install the adapter.

FH(Y)K (Corner type)

