Rapid news number: 13-031
Date: 08/04/2013
From: EU Strategic Marketing
Pages: 4

FCD-0951 rev. 2

SUBJECT: LAUNCH of Daikin Configurator for VRV IV and DAIKIN Altherma LT

Dear Madam
Dear Sir,

We would like to announce you the launch of the Daikin configurator for VRV IV and DAIKIN Altherma LT.



EKPCCAB2

The Daikin configurator hardware EKPCCAB2 consists in PC adaptor with the cables (total length 3,5m). Pre-cut space is foreseen in the box for adding a the controllers EKRUCAL* & EKRUCBL* (not delivered with the configurator)

The Daikin configurator software is the version Configurator_v2.1.0.msi which is unified for both VRV IV and DAIKIN Altherma LT.
The software version can be downloaded from the Daikin website:
http://www.daikineurope.com/support-and-manuals/software-downloads/

1.Functionalities for VRV and DAIKIN Altherma LT:

The following functions are offered on the Daikin configurator:

	VRV IV	Daikin Altherma LT
Auto detection of the unit type	O	O
Offline settings preparation	O	O
Creation of field setting for commissioning	O	O
Upload of field settings to the unit	O	O
Upload language files to the unit to adapt user interface language	X	O
Download of field setting from the unit	O	O
Export of field settings files to CSV format (e.g. print field settings report via Microsoft Excel)	O	O

2.Product compatibility:

The configurator software is compatible with the following product:

VRV IV:

-RYYQ*T*
-RYMQ*T*
-RXYQ*T*

DAIKIN Altherma LT indoor units "C" version:

- EHB(H/X)***C(3V/9W)
- EHV(H/X)***C(3V/9W)

3.Minimum requirements:

- EKPCCAB* connection cable
- PC requirements:
    - Microsoft Windows® XP (SP2), Windows® Vista (SP2) or Windows® 7
    - Microsoft .NET Framework 2.0
    - Pentium III 400 MHz or higher
    - Free USB 2.0 port
    - Minimum Display Resolution 1024x768


4.Daikin configurator software languages

The following languages can be selected for the use of the configurator software.

	Languages		
1	English	12	Ελληνικά
2	Deutsch	13	Русский
3	Français	14	Dansk
4	Nederlands	15	Suomi
5	Español	16	Hrvatski
6	Italiano	17	Magyar
7	Português	18	Polski
8	Türkçe	19	Română
9	Svenska	20	Slovenščina
10	Norsk	21	Български
11	Čeština	22	Slovenčina


5.Connection of Daikin Configurator

5.1.VRV IV connection

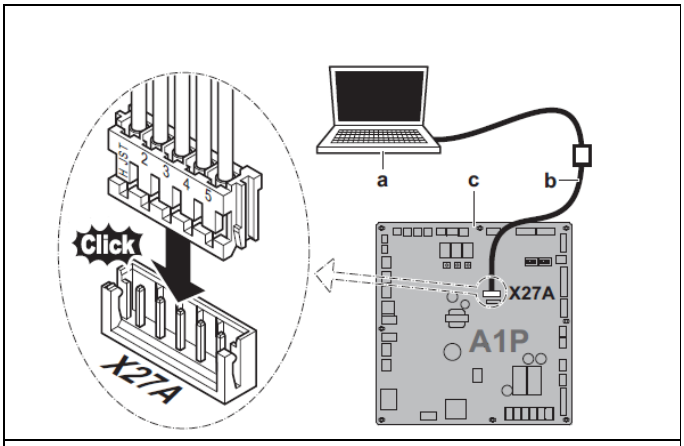

a) PC
b) Cable (EKPCCAB*)
c) Outdoor Unit

5.2.Daikin Altherma LT connection

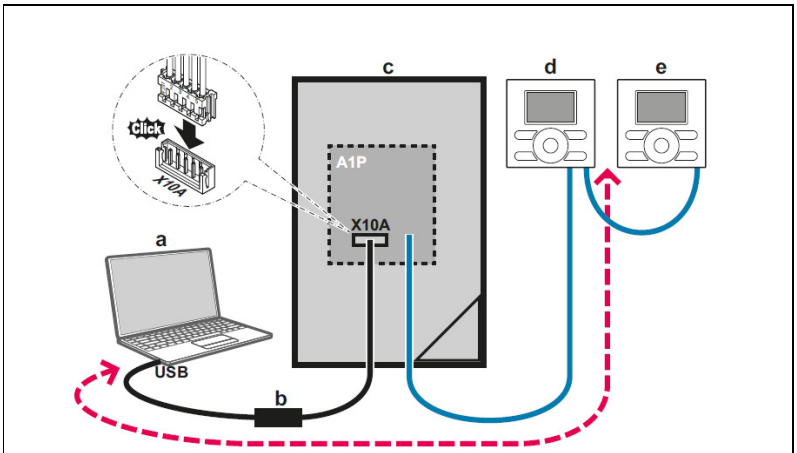

a) PC
b) Cable (EKPCCAB*)
c) Indoor unit
d) Unit interface 1
e) Unit interface 2 (optional)

6.Settings with Daikin configurator software

6.1.VRV IV settings

VRV IV settings through Daikin configurator are those of the commissioning of mode 1 (read only) and mode 2 (read/write)

6.2.Daikin Altherma LT settings

The available settings on Daikin Altherma LT are:

Menu	Menu settings implemented	Details
Home screen settings (e.g., desired temperature, ...)	No	—
"1. Set time/date" menu	Yes	Not implemented: Date and Time settings. Implemented: Daylight saving time and clock type.
"2. Holiday" menu	No	—
"3. Quiet mode" setting	Yes	—
"4. Operation mode" setting	No	—
"5. Select schedules" menu	Yes	—
"6. Information" menu	No	Except: Contact/Helpdesk number setting.
"7. User settings" menu	Yes	Including schedule timers, ...
"A. Installer settings" menu	Yes	• All settings are implemented except: - A.2.1.B User interface location: Not implemented. - A.7 Commissioning menu: All submenus not implemented. Only A.7.2 Set dryout schedule settings implemented. - A.8 Overview settings menu: All settings implemented. Only [A-xx] and [B-xx] outdoor codes not implemented. • Quick Wizard startup screen can be disabled/enabled.

7.Abolished products

The adaptor EKPCCAB1 will be abolished with the introduction of EKPCCAB2

8.Availability

Daikin configurator will be available in April 2013